

SCIENTIFIC AND TECHNICAL WORKSHOP OF THE JCOMM SHIP OBSERVATIONS TEAM

Presentations at the first session of the
Ship Observations Team
(Goa, India, 26 February 2002)

WMO/TD-No. 1118

2002

JCOMM Technical Report No. 16

NOTE

The designations employed and the presentation of material in this publication do not imply the expression of any opinion whatsoever on the part of the Secretariats of the Intergovernmental Oceanographic Commission (of UNESCO), and the World Meteorological Organization concerning the legal status of any country, territory, city or area, or of its authorities, or concerning the delimitation of its frontiers or boundaries.

FOREWORD

A Scientific and Technical Workshop was held as a part of the first session of the Ship Observations Team (Goa, India, 25 February - 2 March 2002), to provide an opportunity to exchange information related to observations on board ships, communications facilities and technology, and the applications of ship-board observations. The workshop concept and structure were modelled on the very successful workshops which have been conducted for a number of years now as an integral part of the annual sessions of the Data Buoy Cooperation Panel (DBCP).

The workshop took place during the second day (26 February 2002) of the session, when 15 papers were read to more than 50 participants. Extended abstracts/ power point presentations/abstracts of the papers presented are included in this JCOMM Technical Report, which is published only electronically, as agreed by the meeting. In all cases, the papers/presentations have been included as received, without any editorial intervention.

TABLE OF CONTENTS

FOREWORD

TABLE OF CONTENTS

AGENDA

PRESENTATIONS

1. Yukihiro Nojiri¹, Maria Hood² and Yves Dandonneau³
¹ National Institute for Environmental Studies, Japan
² Intergovernmental Oceanographic Commission
³ Laboratoire d'Océanographie Dynamique et de Climatologie
VOS/SOOP Measurements of Carbon and Related Variables
2. Tom Houston, Geoffrey K. Morrison, Cynthia Moore and Rod G. Zika
The International SeaKeepers Society
An Automated Ocean and Weather Monitoring System for Use on Volunteer Observing Ships
3. Robert Caplikas¹, Simon Harrod¹ and Ross Hibbins²
¹ Vaisala Melbourne
² Bureau of Meteorology, Australia
Ship Automatic Weather Stations
4. Errki Jarvinen, Vaisala
Development in Vaisala's ASAP equipment
5. Geoffrey K Morrison¹, Frank Millero¹, Flavio Graziottin², Walter Varda³, Regis Cook³,
Richard Wood³ and Rod G. Zika¹
¹ International Seakeepers Society
² Idonaut Srl, Italy, ³ General Oceanics, USA
Report on the Development of CO₂ Monitoring Systems to be Included in an Autonomous Data Gathering System
6. Ron Fordyce¹ and Tom Vandall²
¹ Environment Canada, ² AXYS Environmental Systems, Canada
Improving the frequency and reliability of global meteorological observations at sea
7. Tadashi Ando, Japan Meteorological Agency
The new OBSJMA
8. Christian Ortega, Collecte Localisation Satellites
Argos System, Applications and Enhancements
9. Vladimir Maksimov, Inmarsat, Ltd
New Maritime Safety and Commercial Service in 2002
10. Tomowo Watanabe¹, Michio Sekimoto²
¹ Tohoku National Fisheries Research Institute, Japan, ² Tsurumi Seiki Co., LTD
Results of field tests of the new XCD-2

11. Edward J. Kearns¹, Steven Browdy², Rupert Minnett², Christine Caruso-Magee², Geoffrey K. Morrison² and Rod G. Zika²
¹ University of Miami, USA, ² International Seakeepers Society
Collection and evaluation of marine observations from the International SeaKeepers Society Autonomous VOS Fleet
12. Elizabeth C. Kent and Peter K. Taylor , Southampton Oceanography Centre, UK
The Accuracy of Voluntary Observing Ships' Marine Meteorological Observations
13. François Gérard, Météo-France
An Observation Strategy over the Atlantic

LIST OF PARTICIPANTS

AGENDA FOR SCIENTIFIC AND TECHNICAL WORKSHOP OF THE SHIP OBSERVATIONS TEAM

*VENUE ... Goa, India
DATE ... 26 February 2002*

Workshop chairman: Dr G. Narayana Swamy

Session 1 New Programmes (Chair: Dr G. Narayana Swamy)

- 1. PRACTICE OF OCEAN CO₂ OBSERVATIONS USING TRANS-OCEAN CARGO SHIPS**
Yukihiro Nojiri, Carbon Cycle Research Team, National Institute for Environmental Studies
Email: nojiri@nies.go.jp

ABSTRACT:

CGER-NIES (Center for Global Environmental Research belonging to National Institute for Environmental Studies) started monitoring of oceanic CO₂ and related parameters utilizing North Pacific cargo ships from 1995. The activity was combined with existed atmospheric sampling program using Japan-Australia line container ships. Summary of the history is shown in Table 1.

The daily operation of on board CO₂ instruments is one of most important and difficult issues for the long-term maintenance of VOS observation. Even by the advanced technologies, suction of seawater into the ship is indispensable for the accurate measurement of oceanic CO₂ parameters, such as partial pressure of CO₂ (pCO₂), total dissolved carbon (DIC), pH and alkalinity. The measurement of pCO₂ is most practical and popular CO₂ measurement as an underway mode. Because the measurement uses seawater in the ship, safe installation of the intake and exhaust system for surface seawater and care during the cruise are truly necessary. A complete automatic system may not be enough safe. Asking a regular seaman to watch the water system is usually very difficult under the recent trend of reducing number of crew on board.

In the history of CGER-NIES CO₂ monitoring program using Pacific VOS, the on board system operator was changed from laboratory technicians to a seaman, employed by the research budget. Seaman employment can save the operational cost of the monitoring work. Ship operator also can have benefit of addition of a seaman sharing his working hours. The on board seaman can be responsible about the safety of on board monitoring system, especially for safety of the seawater use.

We made effort for automation of on board CO₂ system, and data networking of equipments, such as air CO₂ system at ship bow, ocean pCO₂ system at ship bottom, and navigation/meteorological system at bridge. On board operator can remotely watch the measurement results at bridge through on board LAN by our update instrumentation. Less necessity of daily on board maintenance facilitates operation by seaman without scientific carrier. The similar type of pCO₂ system has recently been installed on board a North Atlantic VOS under cooperation with Institute für Meereskunde, Germany and NIES.

The oceanic pCO₂ measurement needs SST and SSS information. A thermosalinograph is usually operated simultaneously with the pCO₂ system. The CO₂ VOS program can cooperate with the continuous surface SST and SSS measurement network by VOS.

The integration of global data set of oceanic CO₂ parameters, assurance of analytical accuracy is also an important issue. About DIC and alkalinity, Scripps CRM (certified reference material) is playing a great part. Unfortunately CRM is not so useful for accuracy control of pCO₂. Inter-calibration of on board pCO₂ system and common use of certified CO₂ system are recommended. We are also making effort for the quality control work in this field.

Table 1. History of NIES VOS monitoring including air and ocean CO₂ measurement

North Pacific VOS monitoring (Japan-US/Canada west coast line)						
Ship	Flag	Started	Ended	Air CO ₂	Ocean. CO ₂	System operation
Skaugran	Norway	1995/03	1999/10	hourly	minutely	on board technician employed
Alligator	Liberia	1999/11	2001/05	10 sec.	10 sec.	seaman employed
Hope	Panama	2001/11	active	10 sec.	dual system	employed seaman
Pyxis					10 sec. (2002/06-)	
Western Pacific VOS monitoring (Japan-Australia line)						
Ship	Flag	Started	Ended	Air CO ₂	Ocean. CO ₂	System operation
Hakuba	Japan	1992/06	1996/01	flask	none	unmanned
Southern Cross	Japan	1996/03	2001/05	flask	none	unmanned
MOL Golden Wattle	Liberia	2001/05	active	10 sec.	10 sec. (2002/10-)	employed seaman

2. COORDINATION OF VOS AND SOOP PROGRAMMES MEASURING OCEAN CARBON AND RELATED PARAMETERS

Maria Hood, Intergovernmental Oceanographic Commission of UNESCO, Technical Secretary, SCOR – IOC Advisory Panel on Ocean CO₂
Email: m.hood@unesco.org

ABSTRACT:

The SCOR-IOC Advisory Panel on Ocean CO₂ has recently created an email and web-based communications forum for scientists making measurements of ocean carbon and related parameters. (<http://www.ioc.unesco.org/iocweb/co2panel>) In October 2001, the Panel initiated the development of an inventory of programmes and principle investigators to determine the routes and measurements being made, and to share this information with the wider community. To date, the Panel has identified 21 programmes (8 Atlantic, 9 Pacific, 1 Atlantic-Pacific, and 4 Indian and Southern Ocean) measuring a wide range of ocean and atmospheric variables, including SST, SSS, pCO₂, fluorescence, pigments, optical properties, Total CO₂, Alkalinity, and atmospheric CO₂, ¹³C, ¹⁴C, ¹⁸O, CH₄, N₂O, O₂/N₂, O₃, air temperature, humidity, solar radiation, and wind velocity and direction. The vessels used are approximately 50% research or resupply vessels, and 50% industry vessels. Countries sponsoring programmes include Norway, Germany, UK, Spain, US, Japan, Australia, Canada, and France. A number of these programmes work together to create combined data sets and products. There is a need, expressed by several of the principle investigators, for greater communication between these programmes to improve the coordination and data sharing, and for intercalibration exercises, standardization of techniques, and agreement on and use of certified reference materials and data formats. The Panel discussed the way forward at its 2nd Session meeting, 9-10 February, 2002. The initial inventory and plans for continued coordination and communication with this group of investigators will be presented.

3. BIOGEOCHEMICAL MEASUREMENTS OF SHIPS OF OPPORTUNITY- ONGOING PROGRAMMES AND FEASIBILITY

Yves Dandonneau, Laboratoire d'Océanographie Dynamique et de Climatologie, Université Pierre et Marie Curie, Paris

ABSTRACT:

The marine ecosystems that control the biological carbon sink are complex, including primary producers, grazers, predators, and bacteria, and produce a large variety of dead particles and dissolved organic matter. Their study implies measurements of many kinds of biomass and fluxes, and is possible only during devoted cruises onboard of oceanographic research vessels. Hence, only a limited number of such studies can be made, and these are generally organized in provinces where carbon fluxes are important and over which the dominant processes are considered to be homogeneous and can be predicted.

On the other hand, sea color sensors on satellites deliver data that can be converted into chlorophyll concentration, making it possible to obtain weekly global maps of chlorophyll concentration at the sea surface, i.e., information that is very close to the carbon flux which corresponds to gross photosynthesis.

Between these two approaches, there is a large gap, as global chlorophyll fields derived from satellites cannot be used accurately for the determination of global biogeochemical fluxes unless we know how the ecosystems operate these fluxes in all provinces. Ships of opportunity can help to describe the variability of the ecosystems which is mostly at large scale (regional, seasonal). Programs already exist that are based on sampling by ships of opportunity and that address oceanic biogeochemistry. They can be divided into two categories according to their objectives. Some of them aim to improve the estimates of surface seawater chlorophyll content from reflectance measured at the top of the atmosphere. For this, atmospheric correction represents 90% of the signal, making it a major difficulty. In order to validate the algorithms that estimate the seawater reflectance from reflectance at the top of the atmosphere, measurements of the former must be repeated in many places, covering the wide variability of aerosols and atmospheric conditions. For these measurements, three difficulties must be solved: avoiding the sun glitter, avoiding the white caps, and avoiding surfaces where the irradiance field is affected by the ship. The two last ones are especially difficult to solve. Two radiometers have been developed: the SIMBADA (Laboratoire d'Optique Atmosphérique in Lille, France) is a portable easy to use radiometer, that has 11 wavelengths near or close to those of SeaWiFS or MERIS sea color sensors and can be operated by the officers of ships of opportunity, and the Shadow Band Radiometer, developed at Brookhaven (New York), that is fully automatic and additionally measures the radiation from the sky (without direct sun radiation) using a rotating screen (the 'shadow band'). Other ones aim to describe the variability of biogeochemical conditions at sea, and can include the measurement of a very large number of parameters. Among these, photosynthetic pigments are especially interesting : they offer a way to validate the products of sea color satellite sensors, and they make it possible to characterize the ecosystems, because many of these pigments are indicators of phytoplankton groups. Great care must be taken for the sampling of photosynthetic pigments, especially for storage that must be done at temperature less than minus 40°C. Depending on the measurements to be made, presence of a scientific observer onboard of the ship is often necessary. Examples of such programs are the Atlantic Meridional Transect (AMT) managed from Plymouth, England, and the Geochemistry, Phytoplankton and Color of the Ocean project (GeP&CO) operated from LODyC, France.

Session 2 Observational equipment and telecommunication facilities (Chair: Ms Sarah North)

4. AN AUTOMATED OCEAN AND WEATHER MONITORING SYSTEM FOR USE ON VOLUNTARY OBSERVING SHIP (VOS)

Tom Houston, Geoffrey K Morrison, Cynthia Moore, and Rod G. Zika, International SeaKeepers Society
Email: geoffmorrison@bigfoot.com

ABSTRACT:

The International SeaKeepers Society has developed an autonomous ocean and weather monitoring system. Systems are currently deployed on private superyachts, and commercial cruise ships, which participate in the Volunteer Observing Ship (VOS) program. Wind speed and direction, air temperature, barometric pressure, relative humidity, and sea surface temperature (SST), along with ship's position, are reported automatically to the United States National Weather Service via INMARSAT C email at regular intervals.

In addition to its "weather sensors", the SeaKeepers system is designed to accommodate a wide variety of oceanographic sensors as well. At present all participating vessels carry a suite of ocean sensors that measure, log and transmit data on SST and salinity. Other aqueous sensors such as dissolved oxygen, pH and Eh and optical sensors for chlorophyll and CDOM fluorescence and turbidity are being developed for inclusion in the system and are currently completing field tests. Sensors for pCO₂, total CO₂ and trace metals are also in development. A nutrient monitoring package is also planned.

This process represents a unique collaboration between:

The International SeaKeepers Society, a not for profit organization
The National Oceanographic and Atmospheric Administration, US government
The University of Miami, Rosenstiel School of Marine and Atmospheric Science
General Oceanics Inc. a US corporation
Idronaut Srl an Italian manufacturer

SeaPoint Corporation a US corporation
WS Envirotech a UK manufacturer

5. RELIABLE WIND DATA FROM SHIPBOARD AWS

R Caplikas, Manager, Vaisala Melbourne, Australia
R Hibbins, Instrument Engineering, Bureau of Meteorology, Australia
Email: robert.caplikas@vaisala.com

ABSTRACT:

Truly representative information about wind direction and speed at sea cannot be obtained by observing the weather on the coast. Australia's Bureau of Meteorology has installed a small number of Automatic Weather Station (AWS) on its Australian Volunteer Observing Fleet (AVOF) ships to assist in obtaining maritime weather observations. These ships report generally on a three hourly Synoptic schedule, and relay the conventional weather parameters such as wind speed and direction, pressure, temperature and humidity.

An INMARSAT-C satellite transmitter with an internal GPS receiver is used to transmit observations back to the Bureau's network. The GPS receiver provides information on the ship's position and speed and its course over the water. A laptop PC on the bridge displays real-time information on the AWS measurements. It also enables manual entry of observations such as visibility and sea state.

Data transmission costs from the AVOF ships is an important consideration. For this reason, the standard Synop message is converted to a short binary report prior to transmission and then decoded back to the standard Ship Synop code at the Bureau. This enables the use of very short data transmissions. The benefits are two-fold, observations can be made as frequently as once per hour, and costs are significantly lower compared with other communication options.

AWS data from these ships will significantly contribute to improve accuracy of marine forecasts. For example, the first Ship AWS was fitted to the Spirit of Tasmania to assist in the study of wind patterns across Bass Strait, as part of an effort to enhance the Bureau's computer derived forecasts and improve forecasting for Bass Strait.

At present the Bureau has installed this system on five AVOF ships and is currently planning to install a further five to ten over the next three years. In summary, the Ship AWS system provides automatically accurate, around the clock, information on the marine weather situation. The weather information collected is proving to be an extremely useful contribution for forecasts, and model input both in the Australian area, and also for input into the worldwide NWP models.

6. DEVELOPMENTS IN VAISALA'S ASAP EQUIPMENT

Erkki Jarvinen, Vaisala
Email: Errki.Jarvinen@vaisala.com

ABSTRACT:

This presentation introduces the Vaisala ASAP Product. Product is based on DigiCORA III MW21 based radiosounding equipment. DigiCORA III sets new standards for upper-air sounding operations due to its open software architecture, flexibility, telecommunication and networking capabilities.

Several improvements have been made to GPS-derived upper air wind measurements. These improvements have been implemented in the Vaisala radiosonde design and its associated computation algorithms. The effect of these improvements has been analyzed for performance and reliability and compared with collected operational data from the field.

This presentation will also consider "Data as a product" -concept: Discussion about one possibility to accelerate the increase of the ASAP-observations over the oceans. Vaisala could consider furnishing ASAP-installations and providing data for GTS.

7. DEVELOPMENT OF BIOGEOCHEMICAL AND PHYSICAL DATA ACQUISITION SYSTEMS FOR USE ON MERCHANT VESSELS

Rick Bailey (CSIRO/BMRC JAFOOS Australia), Roger Francey, Bronte Tilbrook, John Parslow (CSIRO Australia)
Email: rick.bailey@marine.csiro.au

8. REPORT ON THE DEVELOPMENT OF CO₂ MONITORING SYSTEMS TO BE INCLUDED IN AN AUTONOMOUS DATA GATHERING SYSTEM

Geoffrey K Morrison, Frank Millero, Flavio Graziottin, Walter Varda, Regis Cook, Richard Wood and Rod G. Zika, International SeaKeepers Society
Email: geoffmorrison@bigfoor.com

ABSTRACT:

The development of two specialized sensors for monitoring air-sea CO₂ flux is described: 1) A pCO₂ continuous-flow system utilizing a miniature shower head equilibrator and 2) a continuous-flow differential pH system for monitoring total inorganic carbonate (TCO₂). The initial development of these instruments was funded by an NSF STTR grant. The second phase of the development is now being funded by an NSF Phase II STTR grant. The two sensors are being designed so that they can be easily installed, together with other ocean and atmospheric sensors, in the SeaKeepers Ocean & Atmospheric Monitoring System currently being deployed on ships, buoys and piers around the world. After being fully field tested, the two CO₂ instruments will be deployed worldwide by the non-profit International SeaKeepers Society to analyze CO₂ absorption by the oceans as a contribution to the research on the role of CO₂ in global warming.

9. IMPROVING THE FREQUENCY AND RELIABILITY OF GLOBAL METEOROLOGICAL OBSERVATIONS AT SEA

Ron Fordyce, PMO Manager, Environment Canada, Hamilton, Canada
Tom Vandall, Director, AXYS Environmental Systems, Victoria, Canada
Email: tvandall@axys.com

ABSTRACT:

The Voluntary Observing Ships' (VOS) meteorological reports provide essential data to meteorologists and climatologists. Currently these observations are collected, corrected (true wind, magnetic variation, pressure etc.) and transmitted manually using the standard WMO format. Until recently, over 20% of the observed data in Canada's VOS program was being rejected by failing automated quality control (QC) tests, or being lost by complications in the data routing pathways to the GTS. Commonly, data was rejected due to errors in the observed wind speed and direction or errors with the observed position.

The manual nature of VOS data collection introduces an inherent risk for observation bias and/or input error. In addition, the frequency of data reporting is inconsistent and often not carried out in extreme weather conditions when the data is most important. Other limitations include the wide variety of uncalibrated instruments that are in use. In an effort to improve Canada's VOS program, Environment Canada contracted AXYS Environmental systems to develop the Automated Voluntary Observing Ships AVOS™ system to transmit fully automated VOS observation reports. This system was based on the successful Watchman™ based buoy payloads in use in the Canadian Weather Buoy Network. Today AVOS™ reports include GPS position, UTC time, vessel identification, 3 hourly ship speed made good, course speed made good, pressure tendency, true wind speed and direction, pressure, air temperature, wet bulb temperature and sea surface temperature. The system uses standardized, calibrated climate quality sensors, which are in use in the National Weather Buoy Network. Early data return rates for AVOS™ have been excellent with automated region detection algorithms supporting reporting modes for Synoptic (6 hr.), Intermediate Synoptic (3 hr.) and Data Sparse (1hr.) regions. As a result the frequency of measurements has risen dramatically with automatic region detection and automatic reporting of STORM and SPREP conditions also taking place.

Through the use of image rich touch screen technology and an intuitive software interface, manually observed data such as cloud height and type, present and past weather, wave conditions and ice and icing can be added to the VOS report. Automated quality control protocols ensure that manual observations are correctly entered. Corrections for elevation and magnetic variation are made automatically using region detection algorithms. PMO's have been very enthusiastic about the simple installation and ease of use with AVOS™ which is helping them to promote the VOS program.

To date Environment Canada has purchased 13 AVOS™ systems and plans to outfit 75 vessels in the Canadian AVOS fleet over the next few years. Ships outfitted with AVOS™ have generated a ten fold increase in the average number of VOS reports. It is apparent that this system will significantly help Canada improve the frequency and accuracy of VOS observations.

10. THE NEW OBSJMA

Tadashi Ando, Japan Meteorological Agency
Email: t_ando@met.kishou.go.jp
(see extended abstract)

11. ARGOS SYSTEM APPLICATIONS AND ENHANCEMENTS

Christian Ortega , CLS/Service Argos
Email: ortega@cls.fr
(see extended abstract)

12. NEW INMARSAT MARINE SAFETY AND COMMERCIAL SERVICES IN 2002

Vladimir Maksimov, Inmarsat Ltd.
Email: vladimir_maksimov@inmarsat.com
(see extended abstract)

13. AUTOMATIC VOLUNTARY OBSERVING SHIPS' SYSTEM BRIDGE TOUCHSCREEN INTERFACE

Tom Vandall, AXYS Environmental Systems, Victoria, Canada
Email: tvandall@axys.com

ABSTRACT:

AVOS™ automatically samples, processes, displays, logs and transmits weather data from VOS ships in the universal FM 13-XI code to VOSCLIM (VOS Climate Project) standards.

Automated parameters include GPS position & UTC time, 3 hourly ship speed made good, course made good & pressure tendency, true wind speed & direction, air temperature & wet bulb temperature, barometric pressure, sea surface temperature, and vessel identification. Through the use of touch screen technology and an intuitive software interface, manually observed data such as cloud height and type, present and past weather, wave conditions and ice and icing can be added to the FM13-XI ship report. Automated quality control protocols ensure that manual observations are correctly entered.

Corrections for elevation and magnetic variation are made automatically using region detection algorithms. Region detection also supports automated reporting modes for Synoptic (6 hr.), Intermediate Synoptic (3 hr.) and Data Sparse (1hr.) reporting regions when required. STORM and SPREP conditions are also automatically detected and transmitted. AVOS Bridge Touchscreen Interface will be demonstrated.

Session 3 Evaluation (Chair: Mr Steve Cook)

14. RESULTS OF FIELD TESTS OF THE NEW XCTD-2

Tomowo Watanabe¹ and Michio Sekimoto²
¹ Tohoku National Fisheries Research Institute
² Tsurumi Seiki Co., LTD
Email: trade@tsk-jp.com

ABSTRACT:

The eXpendable Conductivity, Temperature, and Depth profiler for temperature and salinity observations to a depth of 1,850 m (XCTD-2) was tested during the MR01-K04 cruise of the research vessel R/V MIRAI in the summer of 2001. The new, deep-water probe was recently developed by the Tsurumi-Seiki Co., LTD. Field tests of the XCTD 2K are indispensable for determining the depth-time equation for practical use. On the cruise, 12 probes were launched during CTD up-casts at 11 CTD stations. Successful observations were collected to a depth of 1800 m by 9 of the 12 tests. By using the 9 pairs of XCTD and

CTD profiles, the depth-time equation was estimated as $D = 3.4005t - 3.2 \times 10^{-4}t^2$, where D is the depth in meters and t is the elapsed time after the probe hits the sea surface. The temperature and salinity differences from CTD observations in the deep layer of 1000m to 1500m were -0.001°C and -0.008psu respectively. Standard deviations were 0.018°C and 0.013psu . These values indicate improvement of the XCTD system.

15. EVALUATION OF DATA FROM A PILOT FIELD EXPERIMENT UTILIZING SEAKEEPERS AUTOMATED DATA COLLECTION AND TELEMETRY SYSTEMS ON A GROUP OF VESSELS

Geoffrey K. Morrison, Edward J. Kearns, Christine Caruso-Magee and Rod G. Zika,
International SeaKeepers Society
Email: geoffmorrison@bigfoot.com

16. THE ACCURACY OF VOLUNTARY OBSERVING SHIPS' MARINE METEOROLOGICAL OBSERVATIONS

Elizabeth C. Kent and Peter K. Taylor, Southampton Oceanography Centre, U.K.
Email: elizabeth.c.kent@soc.soton.ac.uk

ABSTRACT:

Typically the merchant ships of the Voluntary Observing Ships scheme are recruited by a Port Meteorological Officer at a port which the ship frequently visits. The observing practises and meteorological instruments provided depend on the recruiting country and are often very basic. Indeed, the VOS system was primarily designed to aid weather forecasting, while climate change studies require higher quality data. A better understanding of the error characteristics of the VOS data is now needed for both data assimilation and climate studies.

Using sea and air temperatures as an example, this talk will show how the large random errors present in the data can be quantified. Determining the smaller, systematic biases is more difficult because correlations exist between the different variables and their respective errors. For example, the error in SST data measured using buckets is likely to depend on the air - sea temperature difference, and hence on both sea and air temperatures. Surprisingly the scatter in the air temperature data seems to vary with how the SST is measured, probably because the observing practises strongly depend on recruiting country. By transforming the data to form new variables which are uncorrelated, the systematic errors can be properly estimated and then transformed back in terms of the observed quantities. The results suggest that, while SST data from engine room intake (ERI) thermometers are very scattered, any mean bias is small. In contrast, while bucket SST data is less scattered, it is biased cold in regions of high heat flux. Previously it had been assumed that ERI data were biased warm.

Improving the quality of future VOS data requires fuller information on instrumentation and observing techniques, and the implementation of good observing practises. These are goals of the WMO sponsored VOS subset for climate (VOS-Clim). Eventually it is hoped to introduce better instrumentation. For example, hull contact SST sensors installed with acoustic data transmission rather than cables. The IMET project at Woods Hole Oceanographic Institute and the AutoFlux system (developed by SOC with European partners) are prototypes for future VOS instrumentation systems.

17. EVALUATION OF XBTs AND XCDTS IN SEA TRIALS

Rick Bailey, Lisa Cowen, CSIRO/BMRC JAFOOS
Ken Ridgway (CSIRO)
Email: rick.bailey@marine.csiro.au

Session 4 Scientific and operational applications (Chair: Mr Jean-Paul Rebert)

18. APPLICATIONS OF UPPER OCEAN THERMAL DATA

Rick Bailey, CSIRO/BMRC JAFOOS
Email: rick.bailey@marine.csiro.au

19. EUCOS, AN OCEAN OBSERVATION STRATEGY OVER THE NORTH ATLANTIC

François Gérard, Météo-France

Email: francois.gerard@meteo.fr

ABSTRACT:

The European meteorological services member of EUMETNET have established a strategy for the definition, implementation and operations of the surface based observation systems of interest for weather forecast over Europe. From 1999 to 2001, the EUMETNET Composite observing system (EUCOS) implementation programme has worked on network evolution scenarios to implement the strategy. The presentation will present the oceanic part of the scenario adopted at the end of the EUCOS programme. It will be shown that the use of sensitivity tools enable to issue clear requirements for the operation deployment of marine platforms like ASAP ships, VOS and buoys, in order to target the observation over the main sensitive areas. The feasibility of such targeting will be shown through the results of an experiment performed in September 2001 with the European ASAP ships.



VOS / SOOP Measurements of Carbon and Related Variables – the SCOR – IOC CO₂ Panel Initial Survey (<http://www.ioc.unesco.org/iocweb/co2panel>)

Email / web-based communications forum for the VOS / SOOP community.

Inventory of programs, funding agencies and dates of operation, routes, ships, measurements made, principle investigators, contact information, web information.


21 Programs / Routes : 8 Atlantic, 9 Pacific, 1 Atlantic-Pacific crossing, and 4 Indian and Southern Ocean . Countries sponsoring programs include Norway, Germany, UK, Spain, US, Japan, Australia, Canada, and France.

Measurements : SST, SSS, pCO₂, fluorescence, pigments, optical properties, Total CO₂, Alkalinity, and atmospheric CO₂, ¹³C, ¹⁴C, ¹⁸O, CH₄, N₂O, O₂/N₂, O₃, air temperature, humidity, solar radiation, and wind velocity and direction.



Vessels: approximately 50% research or resupply vessels, 50% industry vessels.

Carbon Variability Study from Ships of Opportunity (CAVASSOO)

EC funding 2001-2003; University of Bergen, Kiel, East Anglia, and Instituto de Investigaciones Marinas, Spain.

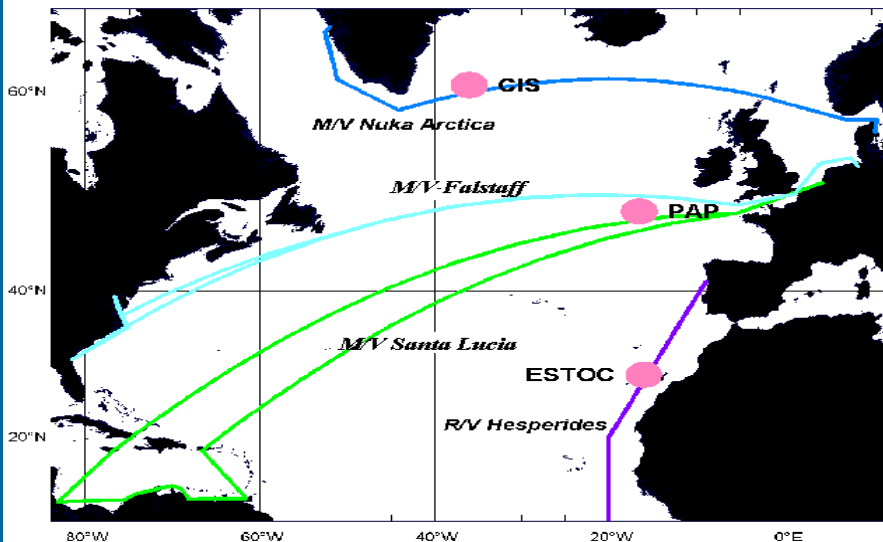


NOAA Underway pCO₂ Programs – Atlantic Oceanic and Meteorological Laboratory and the Pacific Marine Environmental Laboratory

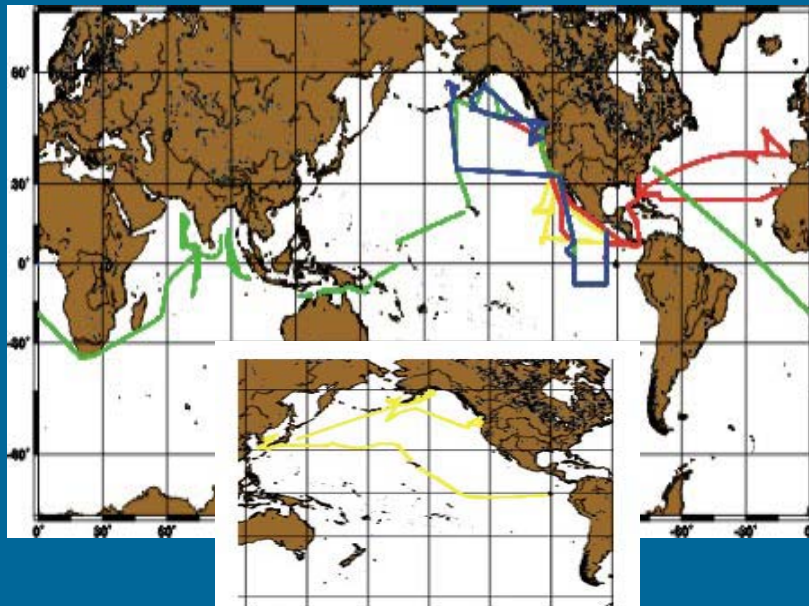

Océan Indien Service d'Observation (OISO)

Institut National des Sciences de l'Univers, Institut Français pour la Recherche et Technologie Polaires, Institut Pierre Simion Laplace, et University Pierre et Marie Curie.

Trajets OISO

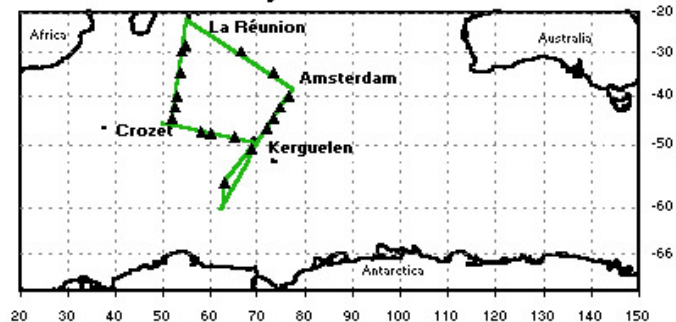


Geochemistry, Phytoplankton and Color of the Ocean (Gep&Co)

Objectives: To describe the space and time variability of the composition of the phytoplankton over a wide range of oceanic conditions; To understand how oceanic conditions control this variability; and To build a database of field observations for the retrieval of some main phytoplankton groups using sea color detected from satellites.

Ship: Merchant ship Contship London

Route: Le Havre (France) to Nouméa (New Caledonia) via New York, Panama, Tahiti and Auckland, every three months.

Status: Gep&CO started in November of 1999, and was scheduled for 3 years. At present, 10 cruises have been made, and the last two are scheduled in April and July of 2002.

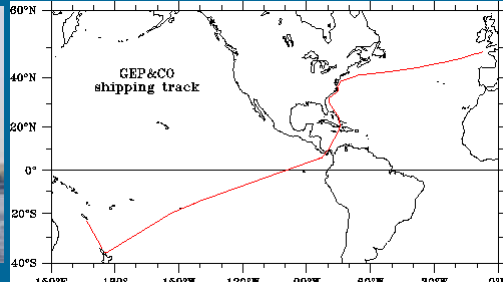

Panel Projects for VOS / SOOP

To complete the initial inventory of carbon and related measurements from VOS / SOOP;

To bring these groups together into a 'virtual' forum to exchange information and data;

To develop intercalibration projects and agreements on the use of certified reference materials where needed;

To encourage the closer coordination of VOS / SOOP measurements with other observation programs such as hydrographic sections and time series stations;

To encourage the further development of automated measurement techniques for a suite of ocean carbon and related variables, including ocean color.

An Automated Ocean and Weather Monitoring System for Use on Volunteer
Observing Ships (VOS)

Tom Houston, Geoffrey K. Morrison, Cynthia Moore and Rod G. Zika
The International SeaKeepers Society
4600 Rickenbacker Causeway
Miami FL 33149
www.seakeepers.com

The International SeaKeepers Society has designed an autonomous oceanographic and meteorological monitoring system which can be deployed on a wide variety of platforms to collect data for marine weather forecasting and oceanographic research. The compact modular system has been deployed on yachts, cruise ships, commercial vessels, research ships and piers. Low energy-demand systems are being developed for use in buoys, in partnership with the National Data Buoy Center of the National Oceanographic and Atmospheric Administration (NOAA). These are expanding the VOS network with reliable, timely and accurate reports every three hours by INMARSAT Standard C telemetry, and collecting data on oceanographic conditions, stored every minute. The system carries a standard suite of sensors, and can accommodate specialized sensors for focused research problems. The society has invited instrument manufacturers, academic faculty, government agencies and other organizations to design sensors and experiments utilizing the SeaKeepers capabilities for low-cost world-wide environmental research..

The monitoring system, shown in Figure 1, is housed two NEMA-4 stainless steel enclosures to facilitate installation in a variety of configurations. The smaller module contains the computer, the INMARSAT transceiver and the power supplies. The second module has the pump, a distribution manifold, and mounting brackets for up to five instrument packages. The modules are each 16 inches wide, 10 inches deep and 18 inches/30 inches high.

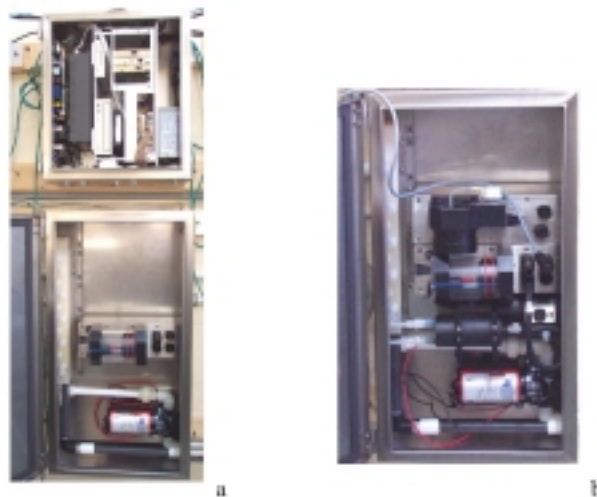


Figure 1. The Ocean and Weather Monitoring System. The standard system is shown in figure a, and the instrument module with an expanded suite of sensors in b.

The meteorological station illustrated below (figure 2) comprises components manufactured by R M Young Inc. In most applications all of the sensors are mounted on a single mast.

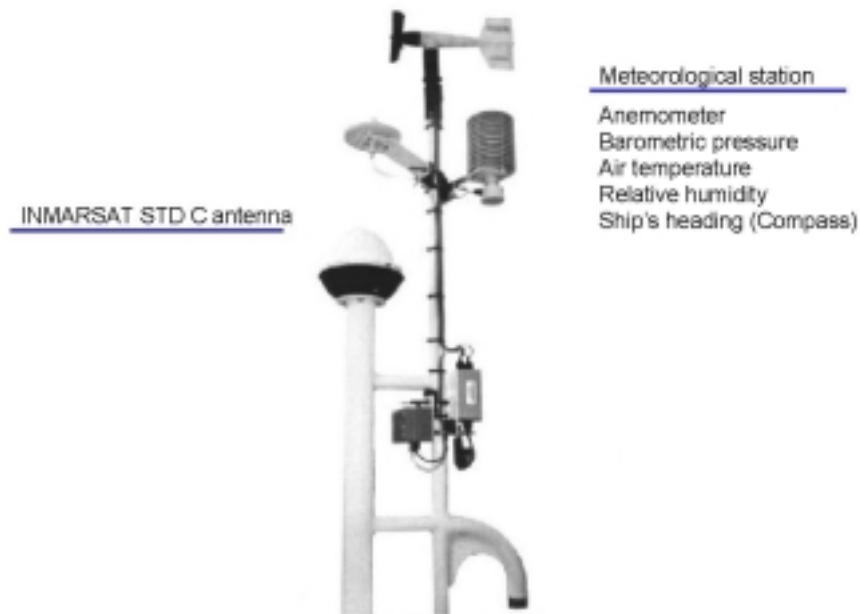


Figure 2. The meteorological sensor suite comprises wind speed and direction, a fluxgate compass, barometric pressure, air temperature and relative humidity.

The standard SeaKeepers installation has a multi-parameter sensor for oceanographic measurements which includes temperature, conductivity, dissolved Oxygen, pH and Eh. A platinum resistance thermometer mounted outside the hull at the water intake measures sea surface temperature (SST). Solid-state optical sensors have been developed for Chlorophyll-a and dissolved organic material (DOM) fluorescence and Turbidity. A new sensor suite is under development by SeaPoint Sensors, Inc. that will incorporate Turbidity, Chlorophyll and CDOM in one package. Toxic metal sensors are being developed by Idronaut Srl Italy to fit into this system. A nutrient sampling package has been developed by WS Envirotech in the UK and will shortly be undergoing sea trials.

A phase II NSF Tech. Transfer grant has been awarded to General Oceanics Inc. in conjunction with The University of Miami and NOAA AOML scientists to assist in the development of a miniaturized pCO₂ monitoring system that will be suitable for SeaKeepers use and later unattended buoy operation. Details of this system are reported in a paper: Kearns, E. et al., "Report on the development of CO₂ monitoring systems to be included in an autonomous data gathering system." also presented at the JCOMMs meeting in Goa, India.

The modular design of the SeaKeepers Ocean monitoring system makes it possible to deploy many sensors, if they are designed to fit the required footprint. Submodules for mounting electronics and components can be supplied by the society.

One of the advantages of utilizing yachts as one component of the VOS network is the opportunity to sample less frequented ocean regions. Figure 3 illustrate the cruise tracks of 30 SeaKeepers member vessels for 2001. The number of vessels equipped with the Ocean Monitoring system continues to grow.

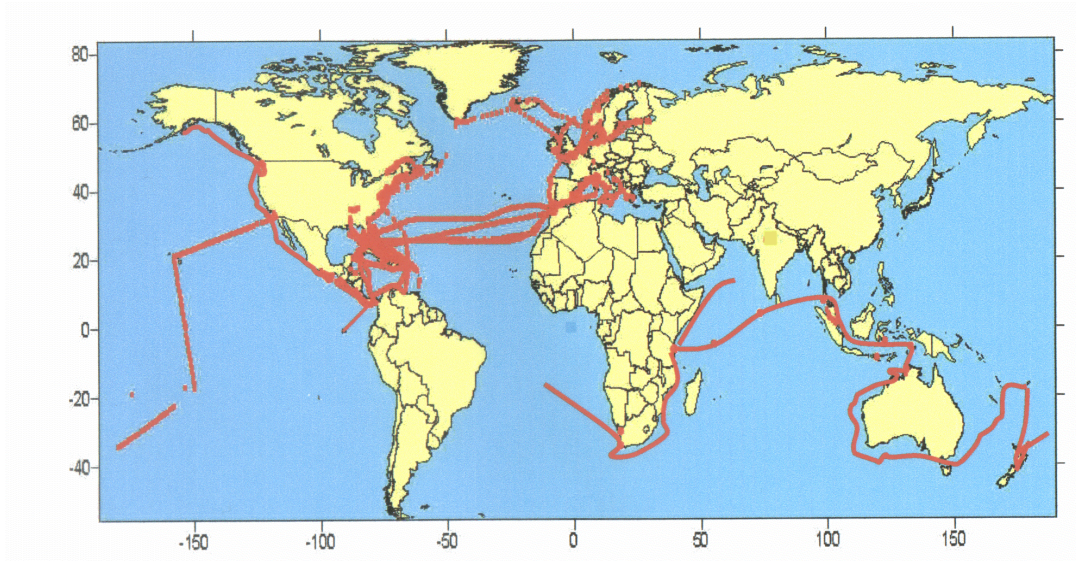


Figure 3. *Cruise tracks year 2001*

Figure 4 illustrates in a cartoon how the data is transferred and handled at the University of Miami prior to distribution to the US National Weather Service via GTS. As the data volume increases we anticipate requiring a full time group of data managers in this area.

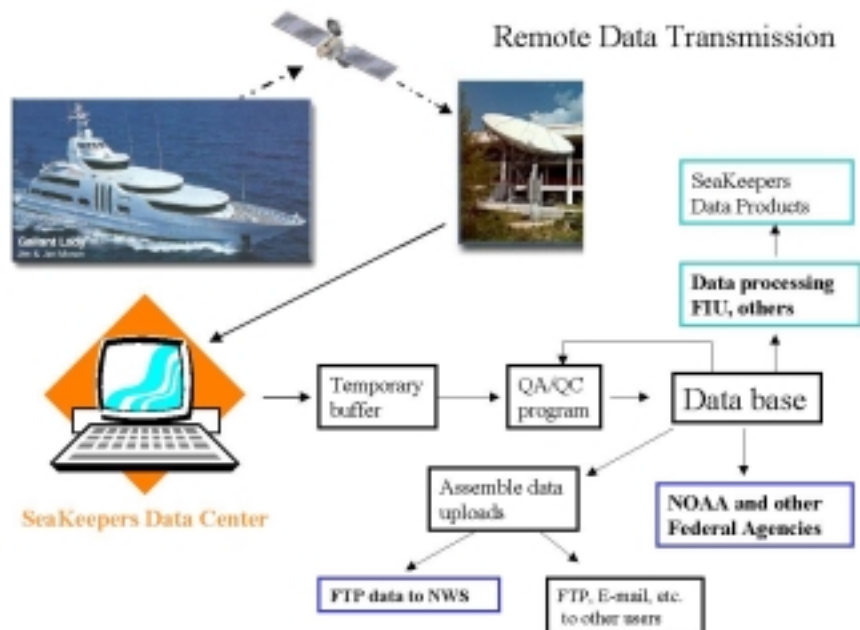


Figure 4. *Data handling*


A spin off from the above system is the creation of an automated weather station that can be readily installed upon any vessel and will fulfill and exceed the VOS ship requirements while logging a high resolution data set for later use. In an effort to develop another source of funding for the Society, the Society is now offering an Automated VOS station which is described in the attached brochure. As well as providing 8 3 hourly observations per day this system will telemeter observation times and positions, while providing an elegant display on the vessels networked computers.

This project represents as unique collaboration between:

The International SeaKeepers Society, a not-for-profit organization
The National Oceanographic and Atmospheric Administration, US government
The University of Miami, Rosenstiel School of Marine and Atmospheric Science
General Oceanics Inc., a US corporation
Idronaut Srl, an Italian manufacturer
SeaPoint Sensors Inc, a US corporation
WS Envirotech, a UK manufacturer

The International SeaKeepers Society has proved that a small determined group of people can make a significant impact on the volume and frequency of marine observations.

The International SeaKeepers Society Automated Volunteer Observing Ship (VOS) Meteorological Station.

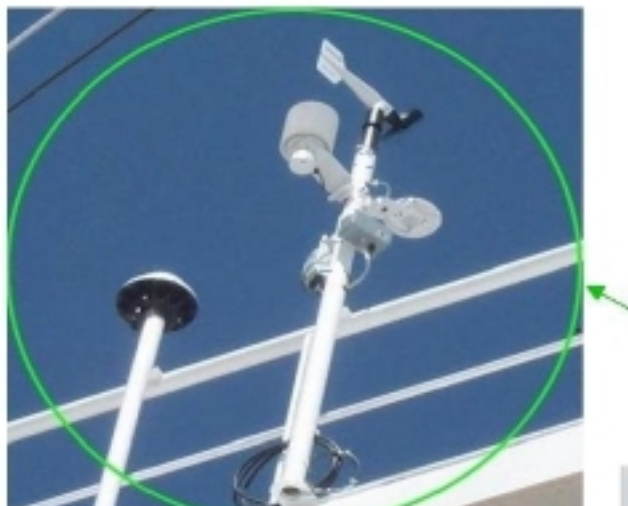

Met sensors and INMARSAT C antenna

Collect data to the quality required by the National Weather Service World Meteorological Organization, and Global Ocean Observing System

Data Transmissions will always be made automatically without involvement by the ship's crew

Avoid time-consuming manual data collection and transmission

Eliminate transcription errors

Improve marine weather forecasting

Generate a permanent record of weather conditions on all voyages




Data transmissions include vessel position and course over the ground, which may be utilized to facilitate better fleet planning. The automated VOS meteorological station which is based upon the International SeaKeepers Society's Ocean monitoring module has been extensively field tested for the last three years; providing data of exceptional quality.


The package includes the weather station, a NEMA4 enclosed computer, INMARSAT C transceiver and a sea surface temperature probe. Simple installation requires running a coaxial cable to the antenna, and 0.25 inch diameter cables to sensor locations both on the mast and to the sea surface temperature probe on the hull. An additional cable is required to connect the system the vessel's computer.

As an option, system can also provide bi-directional email capability (INMARSAT C) for the crew with true global coverage.

Utilizing the vessels computer network any connected computer can access user-friendly data displays.

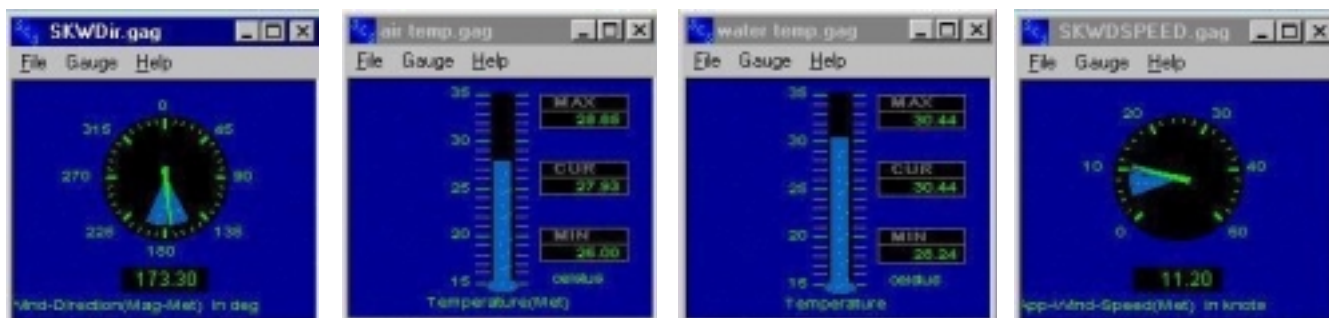

The system further provides a continuous history of weather conditions during the voyage that can be displayed on the ship or sent to headquarters

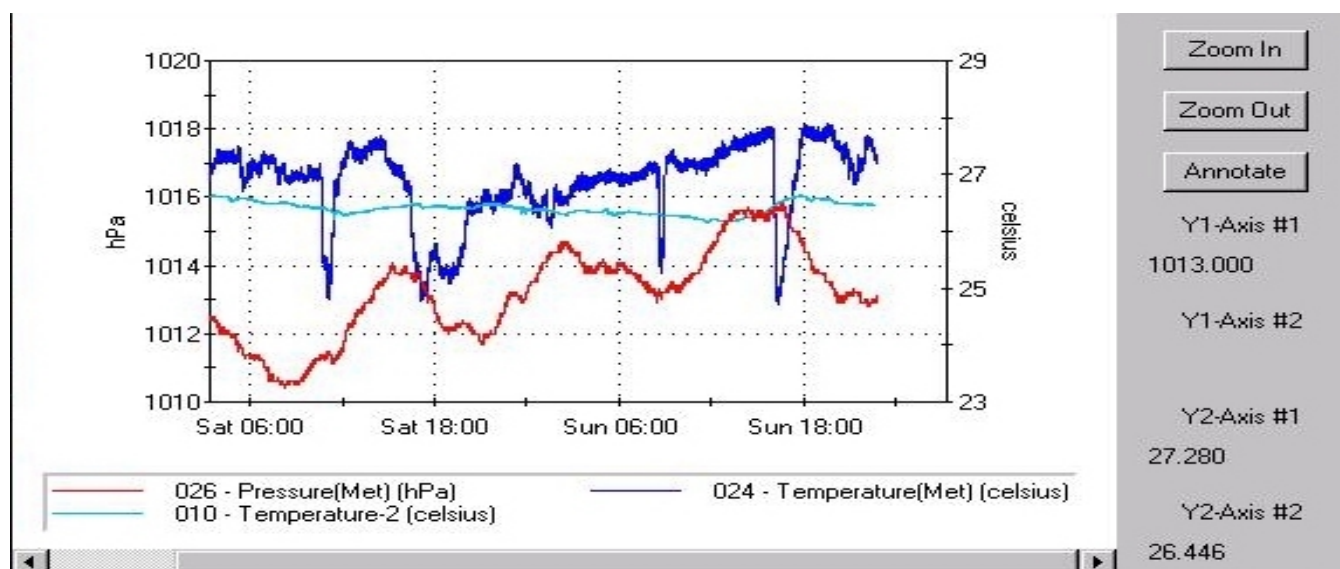

A plot of barometric pressure, air temperature and water temperature from Saturday at 0300 until Sunday at midnight

Sensor specifications

Variable	Units	Range	Accuracy	Resolution
Sea surface temperature	° Celsius	-3 to 50 °C	± 0.01 °C	0.001 °C
Air temperature	° Celsius	-50 to +50 °C	± 0.3 °C	0.1 °C
Relative humidity	%	0 to 100 %	± 3 %	0.1 %
Wind speed	Knots	0 to 120 Knots	± 1 Knot	0.1 Knots
Wind direction	Degrees	0 to 355 Degrees	± 3 Degrees	0.1 degree
Barometric pressure	h Pascals	800 to 1100 hPa	± 2 hPa	0.1 hPa
Course over ground	Degrees	0 to 359 Degree	± 3 degrees	1.0 degree
Speed over ground	Knots	0 to 100 knots	±0.5 knot	0.1 Knot
Latitude	Degrees	-90 to +90	<±0.001min	0.0001min
Longitude	Degrees	-180 to +180	<±0.001min	0.0001min
UTC time	HH:MM:SS	0 to 24 hours	±0.013 sec	0.001 sec

Ship Automatic Weather Stations

Vaisala experience

- **First Ship applications during 80's**
- **From 1986 to 1992, Vaisala supplied thirteen Ship AWS's to Canada.**
- **Some 27 Ship AWS's have been supplied to DWD in Germany during 90's.**
- **4 full automatic AWS with optical sensor to Norwegian Coast Guard in 2001**
- **Total installed base of over 80 systems.**
 - **Research ships, Icebreakers, Cruise Ships, ASAP Ships, Military Ships**
 - **Finland, Germany, Sweden, Russia, USA, Norway, Spain, France, China, Italy, Ireland**

Ship AWS features

- Interfaces for GPS navigation and ship's LOG system.
- True wind calculations.
- Automatic message coding and transmission via satellite (Meteosat, GOES, GMS, Inmarsat-C).
- NMEA compatible input / output.
- Reliability in a demanding environment.

Technology

Vaisala Milos AWS

- Flexibility of the system
 - third party hardware
- Flexibility of the software
 - calculations, reports, serial interfaces
- Worldwide support
- Quality / Standards
 - international standards (CE, IEC, MIL)
- Proven performance
 - > 2000 systems in operation

Overall system

Automatic measurements

- Pressure
- Temperature and Humidity
- True wind speed and direction
- Sea temperature (if fitted)

Manual input

- Cloud and visibility
- Sea state, Ice etc.
- Present/past weather

Overall system options

Optional automatic measurements

- Cloud base
- Present weather
- Precipitation
- Several Solar radiation
 - Global, Albedo, UV, IR
- Precipitation
- Rain Duration
- Sunshine duration
- Multiple wind sensors

Vaisala Ship AWS

Australian Bureau of Meteorology Ship AWS

Vaisala Melbourne


Project Goal

- In 1997 Vaisala and Bureau of Met jointly commenced work on Ship AWS.
 - Initially developed to collect Weather information across Bass Strait.
- To provide a cost effective alternative to existing platforms
- Identify a cheaper method of transmitting Met data
- To transmit the data back real time to the regional forecasting centre.
- To send all Met data via the same communication structure.

System Features

- Automatic measurement of Wind, Pressure Temperature and Relative Humidity
- Calculation of True Wind, Wet Bulb Temperature, 2 minute & 10 minute statistics
- Local display of Real Time data
- Automatic Coding of SYNOP message
- Local storage of SYNOP & 10 minute data
- Cost effective Transmission of SYNOP message via satellite

System Layout In Met Bureau applications

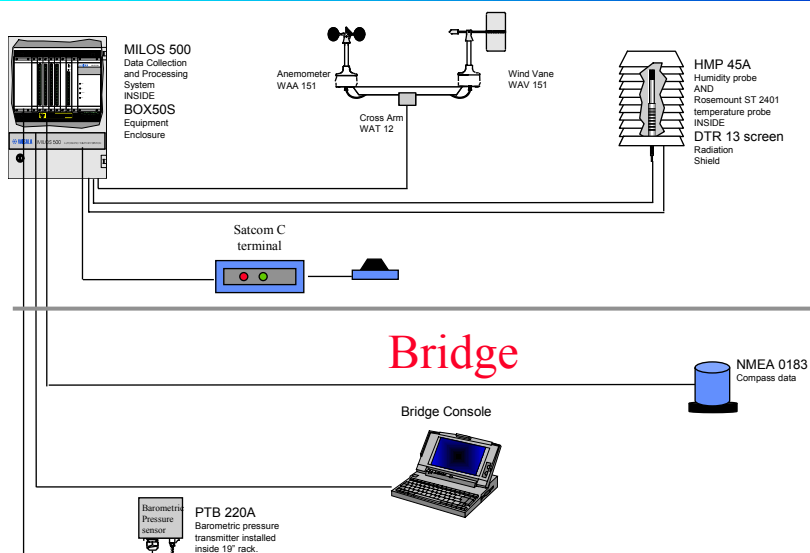

Displays - Real-time View

Your Link [view] - REALTIME [Close]

REALTIME DISPLAY for INSTANT VALUES

Date: 1990 01 01 Air Temperature °C: 21.0
 Time: 00 : 13 UTC Wet Bulb Temperature °C: 14.3
 Latitude: 39.92 S Dew Point Temperature °C: 10.2
 Longitude: 145.92 E Relative Humidity 60s %: 50
 Track: 000 deg. 10 kt. Station Level Pressure: hPa: 893.4
 Heading deg: 218 Mean Sea Level Pressure: hPa: 893.4

Instantaneous
 TRUE WIND 2s 180 deg. T 10 kt.

Average Variation (deg. T) Range (kt.)
 Max. Min. Min. Max.
 2 min: 176 deg. T 10 kt. 113 V 180 10 to 17
 10 min: 176 deg. T 10 kt. 113 V 180 10 to 17

Displays - Editing Template

Your Link [edit, time 09:49] - SHIP [Send] [Cancel]

SHIP'S SURFACE WEATHER REPORT

Call sign: YYGG lw LaLaLa QcLoLoLoLo IRlx h VV N dd ff fff
 BBXX TEST 18 12 4 99 399 3 1459 4 6 18 10 (00)

Sn TTT Sn TdTdTd PoPoPoPo PPPP a ppp ww W1W2 Nh CLCMCH
 1 0 204 2 0 06 3 0226 4 0226 5 7 8

Wind waves: Swell waves: 1st Swell waves 2nd Swell waves:
 DsVs SsTwTwTw PwPwHwHw dw1 dw2 dw2 Pw1 PwHw1 Hw1 Pw2 PwHw2 Hw2
 222 8 2 0 2 3 4 5

IsEsERs Sw TbTbTb ci Si bi Dzi
 6 5 12 ICE


Previous SHIP message

Sample messages

- BBXX VLST 24174 99383 31448 46/// /0124 10118
20094 30202 40233 52008
22224 85105
- BBXX VLST 24184 99381 31449 46/// /0123 10117
20088 30203 40234 52010
22284 85101
- BBXX C6CN4 25214 99183 31678 46/// /0514 10238
20220 30076 40099 52017
22243 85225
- BBXX C6CN4 26034 99198 31677 46/// /1807 10233
20213 30059 40082 57019
22243 85219

Communications

- **Satcom C (Data reporting mode)**
 - Cost effective, Global Coverage
 - Ability to send a full ships Obs. message.

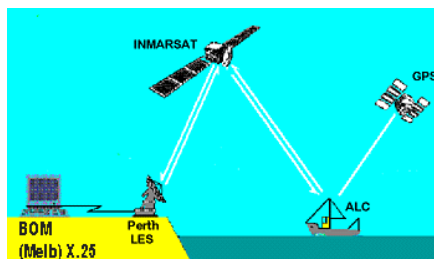

Communications

- The message reported is a binary version of the full ship message.
- The data is sent via Inmarsat C using the data reporting mode, which reduces the running costs. The data is sent to the Bureau via the Perth Land Earth Station.
- The data is decoded within the Bureau and is then placed on the GTS as a full Ship message.


Current communications costs In Australia

- Data reporting mode costs 6 cents per packet
- Automatic observations use 3 packets (18 cents)
- Manual observations use 5 packets (30 cents)
- On average, there is usually one manual obs & 23 automatic ones daily (AUD\$4.44 per day)
- Annual cost is about AUD\$1620 for 8395 automatic messages and 365 with manual input

Bureau Installations

- Bureau currently has six systems in full operation.
 - Austral Leader (VNRA)
 - Iron Yandi (VNVR)
 - Ormiston (VJIK)
 - Pacific Sky (GYYP)
 - Portland (VNAH)
 - Spirit of Tasmania (VLST)

Bureau Installations - Observations

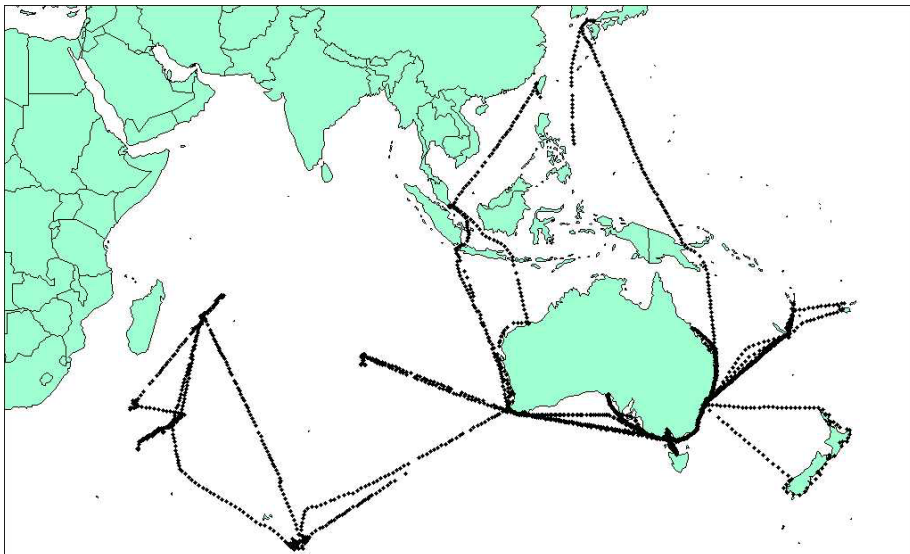

Spirit of Tasmania



Goa 26/02/02

19

Spirit of Tasmania



Goa 26/02/02

20

Pacific Sky



Goa 26/02/02

21

Ormiston



Goa 26/02/02

22

For Consideration...

- **Real Time NMEA output to ships Map system**
- **Variable data transmission intervals**
 - currently 1, 3 or 6 hour
 - position based
- **Local storage of data for VOSCLIM requirements**
- **Data Delivery methods - e-mail etc**
- **Operation in other areas of the world**
 - Global coverage

DEVELOPMENT IN VAISALA'S ASAP EQUIPMENT

**2002-02-26
JCOMM / SOT
Scientific and Technical Workshop
Goa, India**

**Erkki Järvinen
Business Unit Manager, Sounding Equipment
Upper Air Division
Vaisala**

2002-02-21 / EEJ

Contents

- **Vaisala ASAP Equipment**
 - ASAP Launcher
 - DigiCORA III features
- **Windfinding methods**
 - Automatic Loran-C Chain Selection
 - On the Windfinding Accuracy
 - GPS Performance Improvement
- **RS90**
- **New concept for observations over the oceans**
 - Data as a product

2002-02-21 / EEJ

Vaisala ASAP Equipment

**ASAP Launcher
DigiCORA III features**



2002-02-21 / EEJ

Vaisala's Experience in Sounding Automation


ASAP observation containers, more than 15 systems from 1984

- Germany, Spain, Japan, Norway etc.




2002-02-21 / EEJ

ASAP Launcher Construction

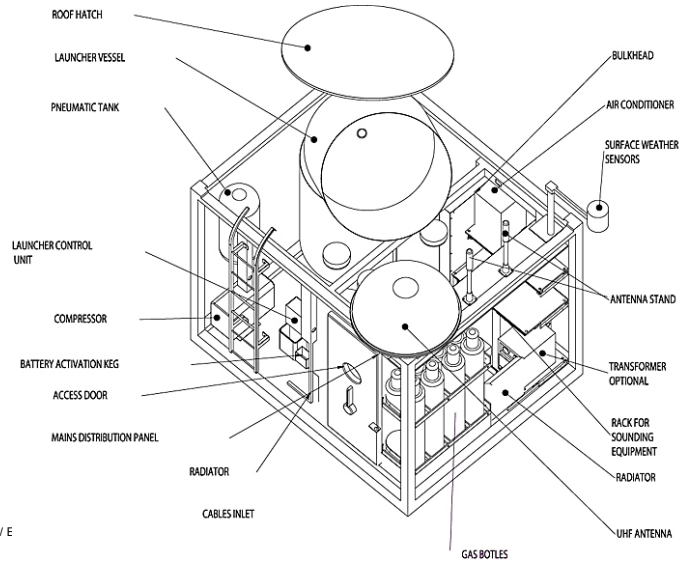

2002-02-21 / E

ASAP System Overview (GPS)

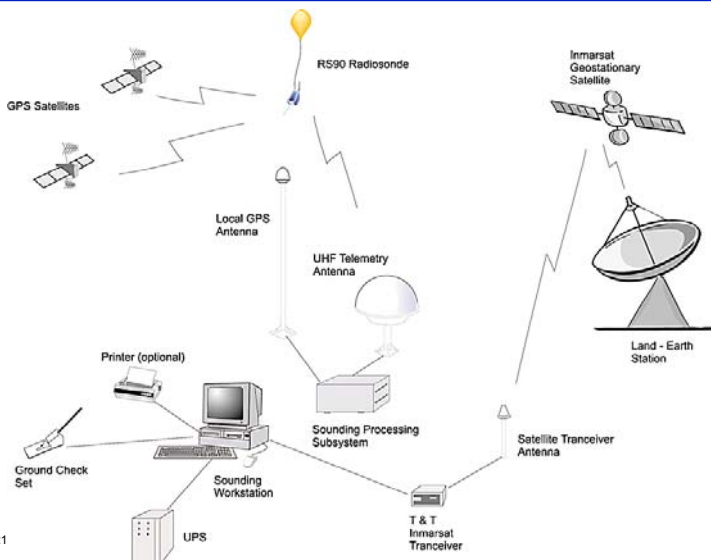

2002-02-21

DigiCORA III Standard Software

- PTU and wind data collection, processing and archiving
- Message creation editing and delivery including:
 - TEMP, PILOT, BUFR,
 - CLIMAT TEMP
 - Inmarsat-C satellite transmission
- Access to software functionality according to user level
- All user prompts can be translated / localized
- Remote use: DigiCORA III with Windows operating system can be remotely controlled from another PC
- **Stable and robust software design**



2002-02-21 / EEJ

DigiCORA III in ASAP

Easy to use compared to existing ASAP installation:

- Automatic Loran-C chain selection
- Possibility to use Inmarsat C
 - Inmarsat C coordinates are fed to the system automatically
 - Compared to DCP, does not lose data in compression
 - Compared to DCP, the data transmission is 100% vs. 80%
- Various possibilities for messaging: TEMP, BUFR
- In next SW-releases:
 - Possibility to feed the surface pressure automatically, P-value from radiosonde or from AWS.
 - Even more versatile means for remote control and remote maintenance than currently.
 - CREX message format


2002-02-21 / EEJ

Windfinding methods

Automatic Loran-C Chain Selection On the Windfinding Accuracy GPS Performance Improvement Project

2002-02-21 / EEJ

Why Loran-C windfinding



Advantages


- Low cost radiosonde
- Accurate
 - Loran-C accuracy meets numerical forecast requirements
- Available in Northern Atlantic (evaluation with Sealand Achiever WPKD)

Limitations

- Regional coverage
- Sounding geometry must be taken into account: Automatic chain selection is the answer
- Future of Loran-C is at stake

2002-02-21 / EEJ


Loran-C and Chayka Coverage

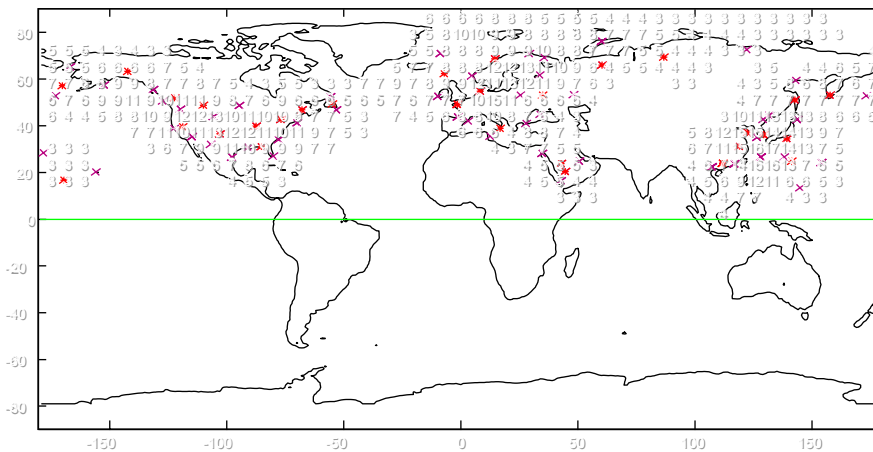

2002-02-21 / EEJ

NOTICE: This is an estimate of the expected coverage

Automatic Loran-C Chain Selection



- Automatic Loran-C Chain Selection selects the **best two chains out of four** predefined alternatives to be used in the sounding before the sounding starts.
- The selection is based on **station geometry** and **signal quality**
- To get the best possible **sounding geometry** for each launch.
- To increase **reliability** of soundings.
 - Disturbances in signal quality (distant chains).
 - Unpredictable maintenance breaks.
- To **simplify** operator's work.

2002-02-21 / EEJ

Windfinding Accuracy, Summary


Windfinding accuracy

- **GPS** Vaisala RS80/RS90 GPS is a very accurate reference with error less than 0.3 m/s
- **Loran-C** Loran-C system provides about 1 m/s accuracy which degrades at ranges exceeding 150 km
- **Radar** Accuracy depends on the range. At short range (<60 km) more accurate and at long range (>130 km) less accurate than Loran-C.




2002-02-21 / EEJ

Sounding Performance - Synoptical Data

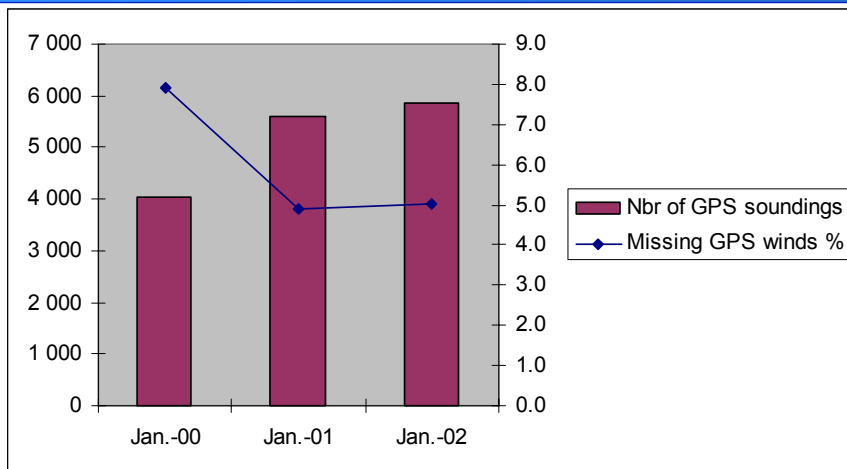

2002-02-21 / EEJ

Vaisala RS90

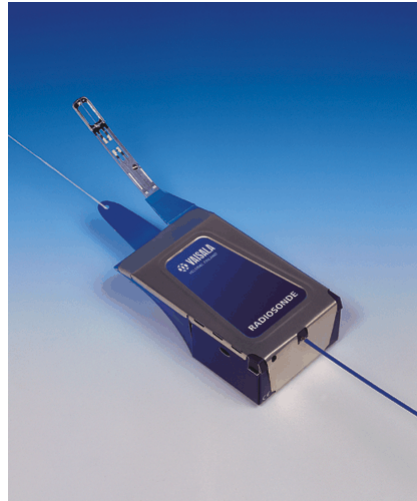

2002-02-21 / EEJ

RS90 Improved Measurement Performance

- **Fast temperature sensor, F- THERMOCAP®**
 - Accurate temperature sensor with fast response time and minimized solar radiation error
- **Shock-resistant pressure sensor BAROCAP®**
 - Silicon pressure sensor, shock resistant, and offers a fast temperature response
- **Fast, defrosting humidity sensor heated HUMICAP®**
 - Short response time, reduces condensation and icing
- **Factory calibration covers a wide measurement range and includes also measurement electronics**

2002-02-21 / EEJ

New concept for observations over the oceans

Data as a product



2002-02-21 / EEJ

Obstacles for ASAP observations

Common understanding has been for long that **more in-situ upper air observations over the oceans are needed.**

Common interest and financial resources don't seem to meet in a timely manner;

- **There are difficulties to finance the investments like sounding equipment and automatic launchers.**

In addition, running the ASAP-operations - deployment of ships, training of crew, global maintenance etc. - may be slightly out of scope of National Meteorological Services ?

2002-02-21 / EEJ

Silver Lining

There are promising efforts going on within E-ASAP program to increase the number of ASAP-ships, and to integrate the existing ASAP-systems into the same operation. The finance may still be uncertain.

There are promising efforts going on in order to increase the efficiency by integrating operations within JCOMM/SOT: But whether this leads to increasing number of upper air profiles over the oceans, remains to be seen.

Data as a Product

For the sake of discussion, there is one more possibility to accelerate the increase of the ASAP-observations over the oceans:

Vaisala could be the data provider from a fleet of 25+ ASAP systems, to include

- **furnishing ASAP-installations,**
- **taking care of logistics for supporting ASAP-operations,**
- **taking care of maintenance & refurbishment of ASAP equipment and**
- **providing meteorological messages for GTS for a fee.**

Such investment would require that there is a negotiating party or few parties with long-term commitment for such co-operation.

Discussion ?

Report on the Development of CO₂ Monitoring Systems to be Included in an Autonomous Data Gathering System.

Geoffrey K Morrison¹, Frank Millero¹, Flavio Graziottin², Walter Varda³, Regis Cook³, Richard Wood³ and Rod G. Zika¹

The goal of this project was to miniaturize an existing pCO₂ monitoring system and its attendant water gas equilibrators, for deployment on yachts, buoys and other platforms of opportunity as a component of the SeaKeepers Ocean and Weather Monitoring System. The requirements for the system were to develop a small, light weight, energy efficient instrument package that could be operated automatically for extended periods of time.

The objectives of the first phase, completed six months ago, were:

1. to modify a compact, less expensive commercial non-dispersive infrared detector (NDIR) CO₂ sensor to monitor pressure and temperature of CO₂.
2. to calibrate and make stability tests for the compact NDIR CO₂ sensor
3. to fabricate a miniaturized showerhead equilibrator
4. to perform laboratory bench tests of the new instrument against a reference unit
5. and to perform at sea tests of the new instrument against a reference unit

Figure 1 illustrates schematically the principal components of a pCO₂ sensor. A closed loop of air is passed through a equilibrating chamber, where water with the unknown CO₂ concentration is sprayed from a shower head to maximize surface contact between the water droplets and the air. This allows the CO₂ concentration in the air to equilibrate with the CO₂ concentration in the seawater. The air stream is then passed through a (NDIR) to measure the change in the CO₂ concentration in the air. The concentration of dissolved carbon dioxide in seawater is a function of temperature and salinity.

¹ The International SeaKeepers Society, 4600 Rickenbacker Causeway, Miami FL 33149 USA

² Idronaut Srl, Milan Italy

³ General Oceanics, Miami FL USA

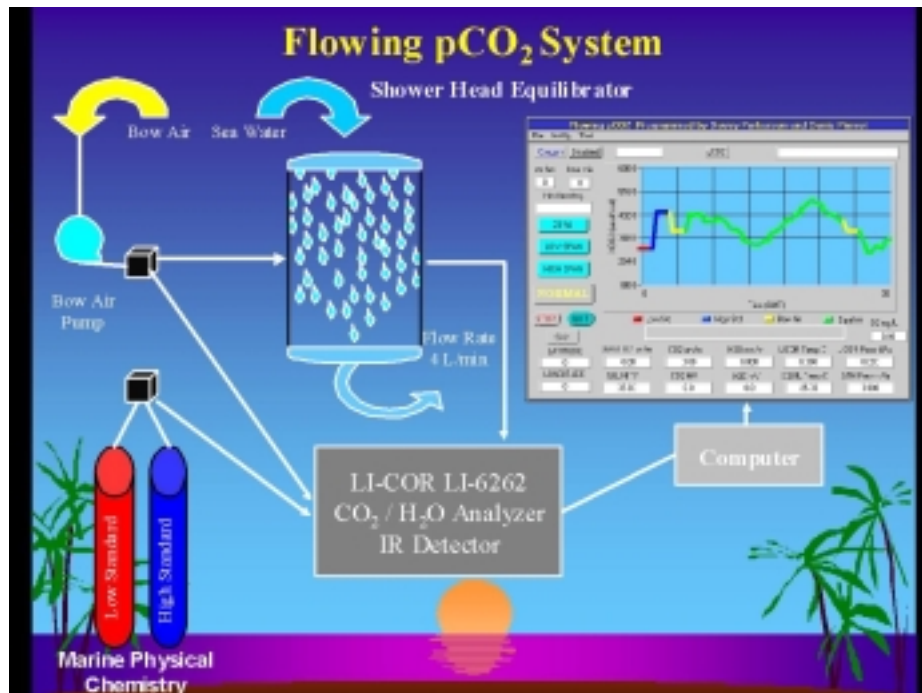


Figure 1. Generalized scheme for measuring pCO₂ in seawater.

Stand-alone pCO₂ instruments have become common in oceanographic research on the total carbon cycle and its implications for global warming.. They typically have been large systems, requiring large volumes of continuously flowing seawater and high pressure cylinders of calibration gases. Efforts have been underway in our laboratory to reduce the size and complexity of the instrumentation. Figure 2 shows the equipment used by Millero to make these measurements on research vessels. The photograph does not show the 40-liter waterfall equilibrator, which is the active part of the system. Although smaller than those used by others, it is still considerably larger than the permitted SeaKeepers footprint or the space available in a monitoring buoy.

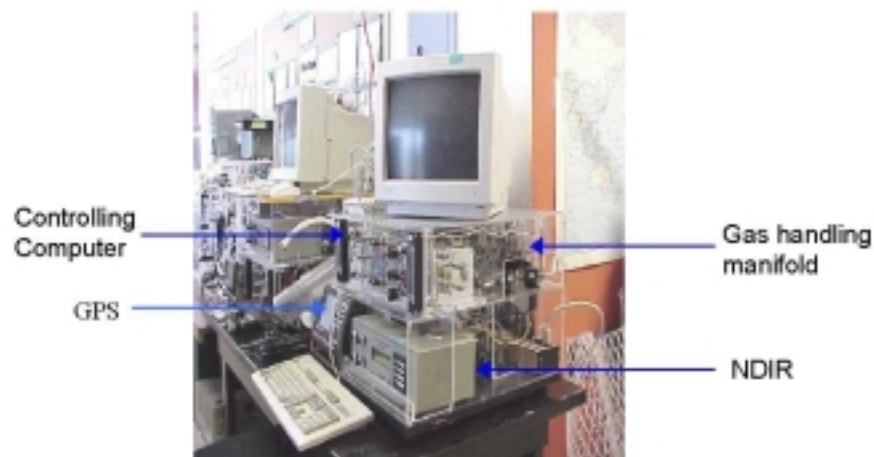


Figure 2. Research pCO₂ monitoring system for field work.

The SeaKeepers modules were designed to provide a complete monitoring system in a compact modular format, so that sensors could be interchanged as research projects required. The system is contained in two stainless steel NEMA-4 enclosures, which are together 48 inches high, 16 inches wide and 10 inches deep. The enclosures can be separated and mounted in a variety of configurations to fit the available space. The instrumentation module has a manifold to support five discrete instrument packages in independent submodules of 4x8x12 inches (Figure 3). The ultimate goal is to develop a pCO₂ sensor that will fit in a submodule.

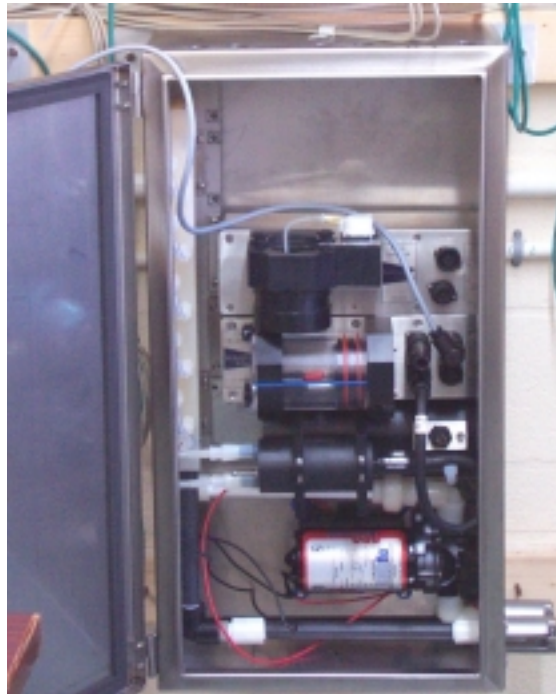


Figure 3. Instrument module with pump, manifold and 3 sensor submodules: Turbidity/CDOM, CTD (temperature, conductivity, dissolved oxygen, pH, Eh), and a prototype trace metals analyzer.

An inter-comparison between the “standard” detector (the Li-6262) and the smaller Li-800 gas analyzer proposed for this application is shown in figure 4. While it is clear that absolute calibration shifts are occurring, the similarity in the shapes of the curves and their response times are encouraging.

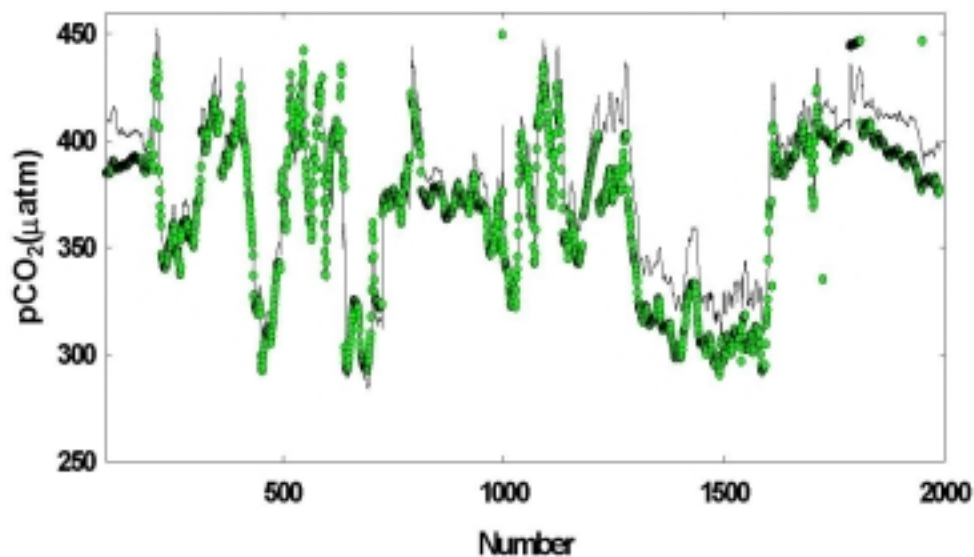


Figure 4. Intercomparison between the *Li-6262* and the *Li-800* NDIR detectors

A wide range calibration of the detector yielded a standard deviation of 4.3 micro-atmospheres, which indicates the possibility of achieving the research criterion of ± 1 micro-atmosphere over the more limited ambient observed range. Stability measurements made with the smaller detector gave a standard deviation of 1.06, which is again very encouraging.

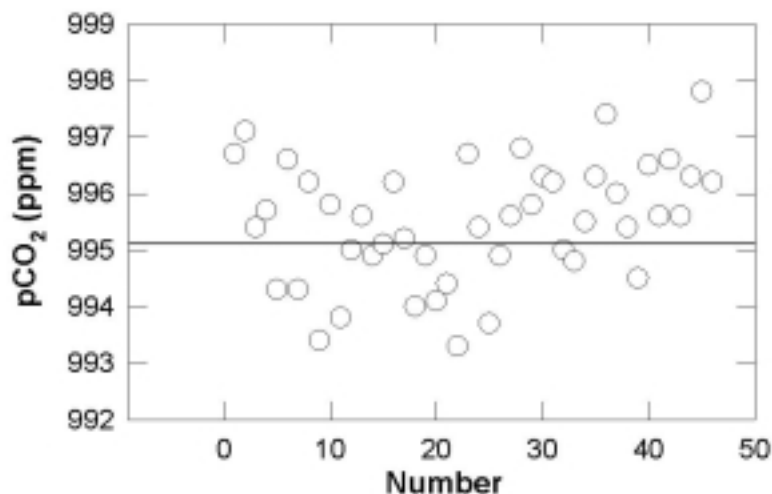


Figure 5. *Li-800* stability with time. $\sigma = 1.08$

The Li-800 NDIR may be adequate for the intended use, and has the advantages of being smaller and less expensive than the Li-6262

There remains an instrumental design problem to be resolved. Water is pumped through the system and returned to the source, while air of known concentration is pumped through the equilibrator (Figure 6). It is critical that the water level in the equilibrator remain constant, so

the air circulation is a closed loop. If the liquid level drops in the equilibrator, the system can draw in outside air which can change the concentration of CO₂ in the air and the equilibrium values of the system, independent of the exchange with the sample water. On the other hand, if the water is allowed to overflow freely with little or no retention time, air will be lost as entrained bubbles. The air loss problem increases in severity and complexity as the volume of the equilibrator is decreased. It was decided to attempt to design a system which would continuously control the water level while using bubble traps to minimize bubble air loss.

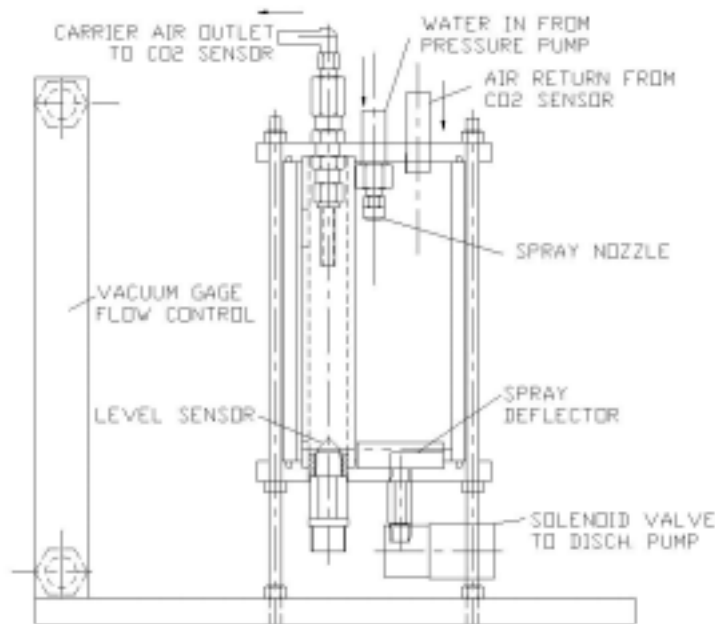


Figure 6. Schematic of the prototype pCO₂ equilibrator.



Figure 7. Equilibrator and control system in SeaKeepers submodule

In a bench top comparison between the research grade instrument and the prototype, response and tracking appear to be in good agreement (Figure 8). There is a clear calibration offset and perhaps a systematic drift in the prototype that could be attributable to loss of equilibrated air and replacement with fresh air. The addition of a water level control in the next version may resolve these issues.

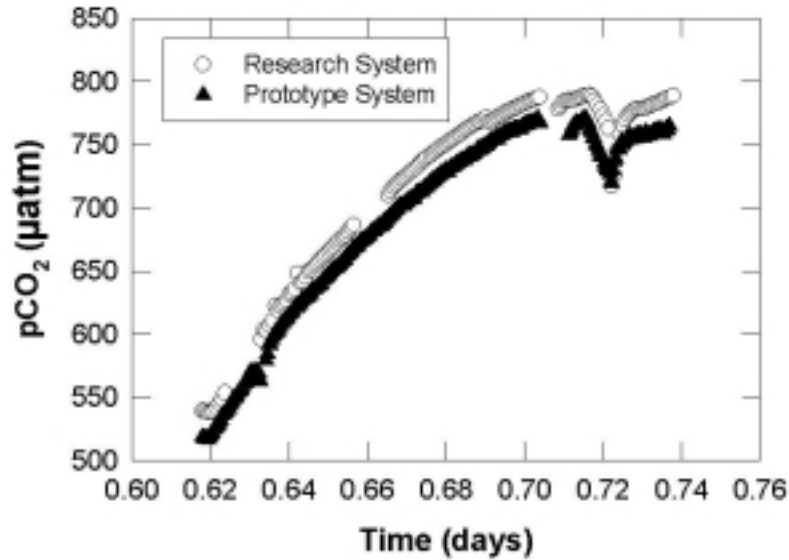


Figure 8. Bench top comparison of the two systems

During a one week cruise of the R/V F. G. Walton Smith, an informal inter-comparison was made between the research grade sensor and the prototype (figure 9).

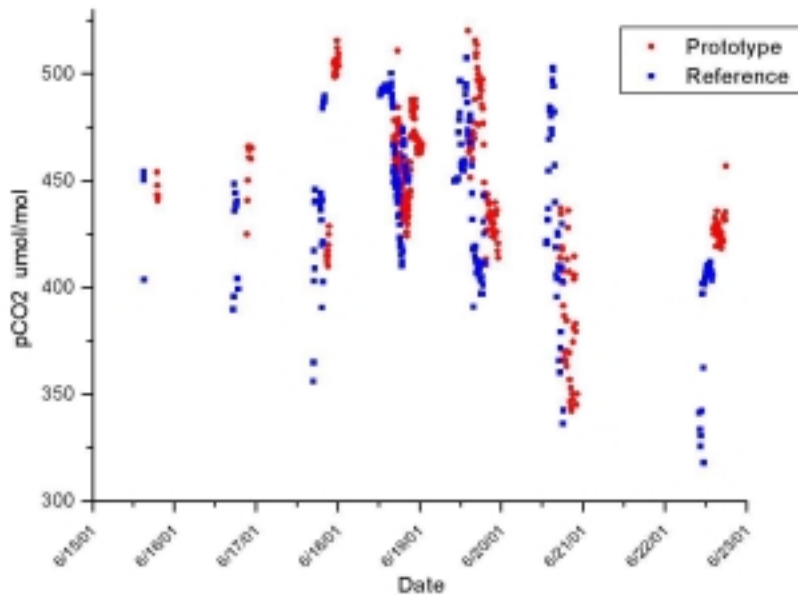


Figure 9. Field trial of the prototype, compared to a research system.

The results, while encouraging, are far from the desired accuracy of one micro-atmosphere. Additional funding was been obtained to further develop the miniaturized pCO₂ analyzer and to deploy it on platforms of opportunity such as SeaKeepers member yachts, piers, buoys and commercial ships.

Another parameter, besides pCO₂, which is routinely measured to characterize the CO₂ system is total dissolved inorganic CO₂ (TCO₂). Currently, TCO₂ measurements involve acidifying the seawater sample with phosphoric acid and measuring the amount of CO₂ evolved by either coulometry or infrared detectors. A new and promising technique for measuring TCO₂ has been developed in cooperation between Idronaut Srl, (Milan, Italy) and the University of Rome (figure 10). The system uses peristaltic pumps to fill a mixing chamber with an unknown sample of seawater. The differential pH sensors are normalized by passing this sample through both channels. A buffer solution is then added to the sample in one channel, stirred and the change in pH measured relative to the untreated sample. The volumes used of seawater and buffer are miniscule,

The differential pH sensors rely upon beautifully constructed capillary electrodes. Differential repeatability to the fourth decimal place has been observed. A unit in the third decimal place is equivalent to one micro-atmosphere.

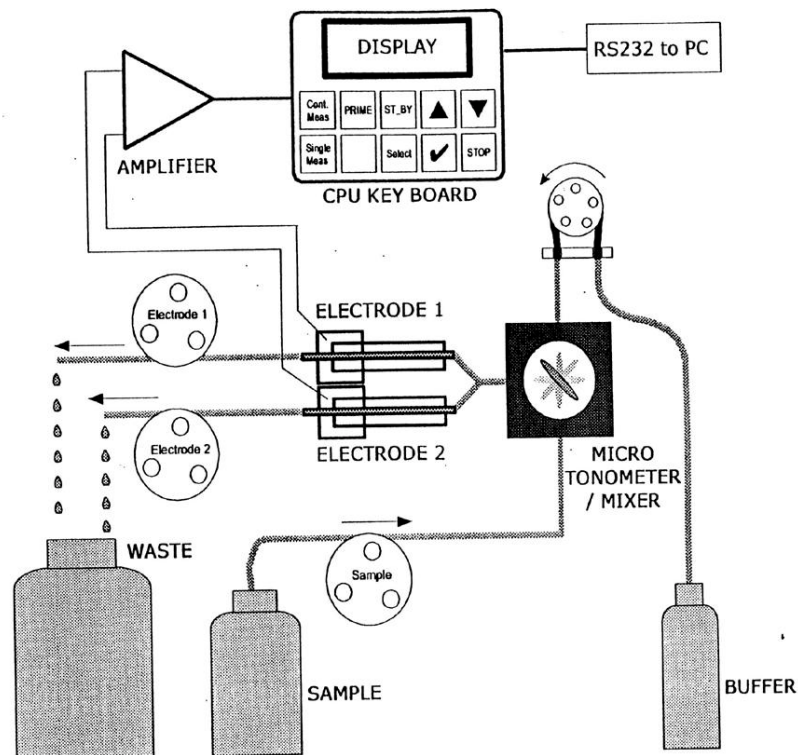


Figure 10. Prototype TCO₂ instrument

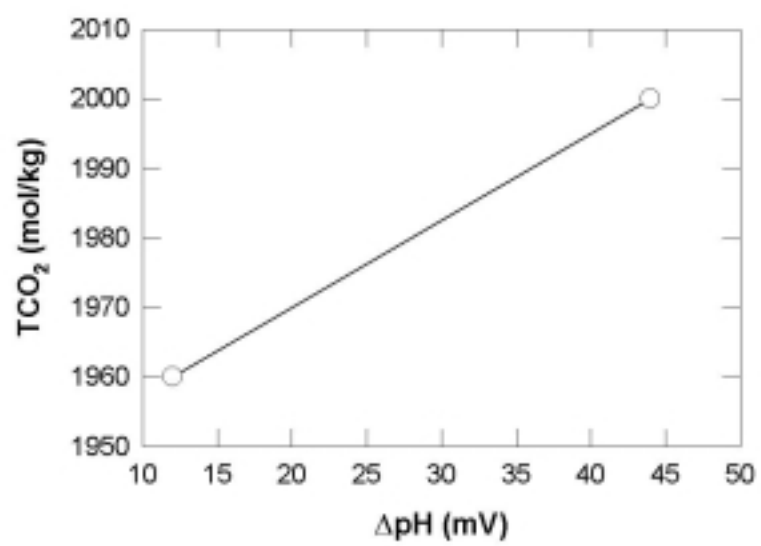


Figure 11. TCO₂ calibration curve

Improving The Frequency and Reliability of Global Meteorological Observations at Sea


*by
Ron Fordyce
and
Tom Vandall*

Canadian VOS Program...Challenges


*Declining number of VOS ships (reports)
Smaller crews with higher workloads
Limited PMO resources to manage fleet
Requires system standardization to optimize operational
support and increase data quality
Requires specialized training
Significant time commitment
Human error
QC failure rate of approximately 20%*



Number of VOS Ships

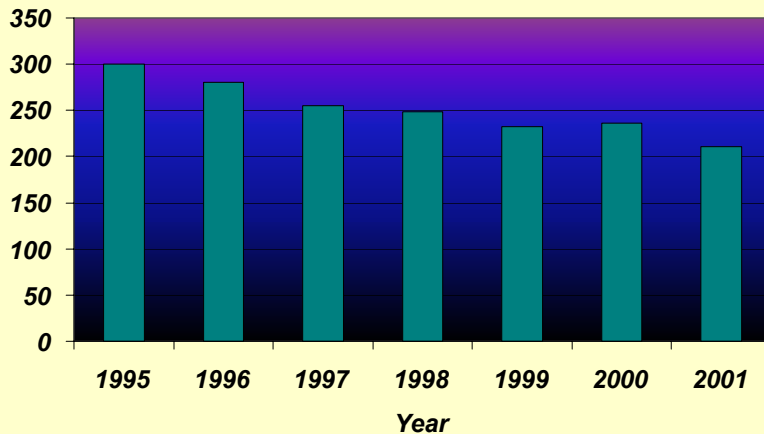

Annual Change in Canadian VOS Reports

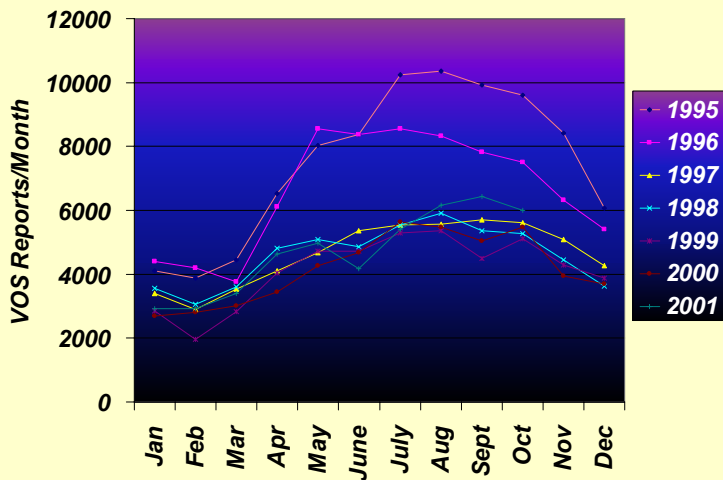

Canadian VOS Objectives

Increase the frequency and reliability of VOS reports*

Decrease the number of ships

Standardize the fleet

Improve data quality

*Implement VOSCLIM**

*Minimize manual requirement**

*Reduce QC failure rate**

Enhance forecasting capabilities


***Automation... Reliability...
Watchman™...***



AVOS™



- Automatic Voluntary Observing Ship's System
- Automated measurements, reports and telemetry
- Reliable Watchman™ based controller processor
- Intuitive image-rich touch-screen Bridge Interface
- VOSCLIM sensors
- Operates round the clock

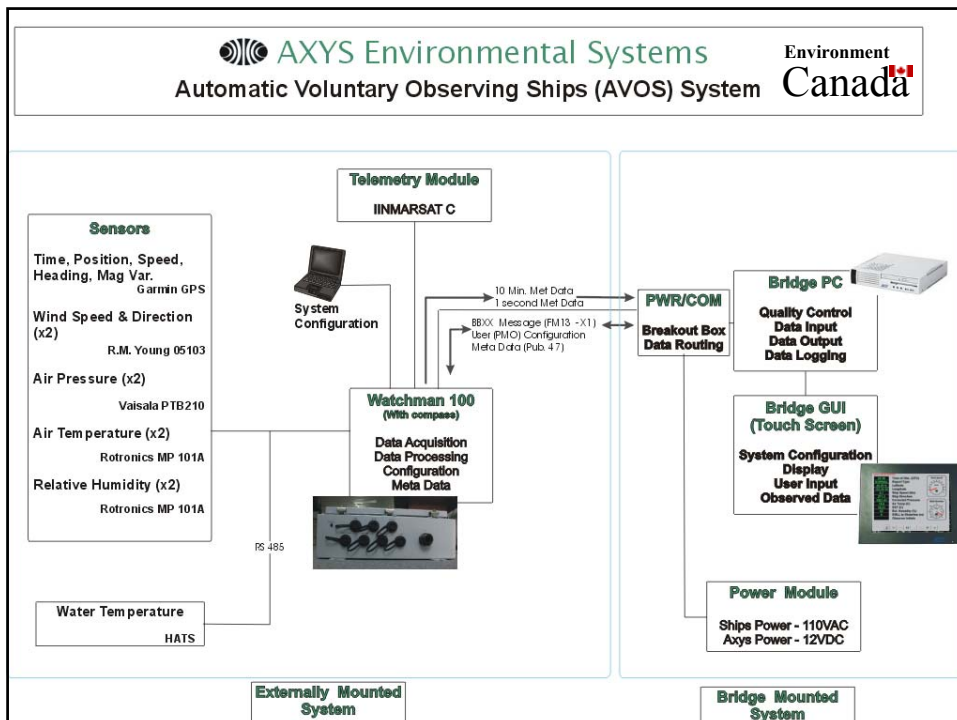



Sensors:

Parameter	Sensor Model	Range	Accuracy	Resolution
Wind Direction	RMY 05103	360°	±3°	1°
Wind Speed	RMY 05103	0 to 60 m/s	±0.3 m/s	0.1 m/s
Water Temperature	HATS	-10° to +50° C	±0.05°C	0.01°C
Air Temperature	Rotronics MP101A-T7	-40° to +60° C	±0.3°C	0.1°C
Relative Humidity	Rotronics MP101A-T7	0 to 100 %	±1%	1%
Air Pressure	Vaisala PTB210	500 to 1100 hPa	±0.15 hPa	0.01 hPa
Compass Heading	KVH C100	360°	Compass Swing score dependant	0.1°





AVOS™ Controller Processor

Setup and configuration from Watchman™ or Bridge Interface. Includes sensor calibrations (offset and scale factors)

Metadata – sensor type, model #, serial #, calibration due date, location, installer, country, date etc.

SST depth, barometer ht. above SMLL, corrected to SL anemometer(s) ht. above SMLL

Processing - Region detection (auto synoptic modes), pressure correction for elevation, ships speed and course made good (3hr.), true wind from apparent, auto SPREPS and STORM detection and reporting, cont. 10 min avgs.



AXYS ENVIRONMENTAL SYSTEMS

Environment
Canada

AVOS™ Power & Wiring

12VDC from ship mains, 5 day battery backup for AVOS Controller Processor

Bridge Interface ships mains with UPS

All sensors are mounted on AVOS mast (except SST) and powered by controller through communications wiring.

Three serial configuration ports with controller, terminal setup, bridge Interface, and real time winds

INMARSAT C, GPS are mounted on mast.

Installation about 2 days


AVOS™ Bridge Interface Software

The AVOS™ Display Software performs six main functions:

- *configuration of the AVOS™ payload,*
- *display of AVOS™ payload data,*
- *input from users for observed data,*
- *data quality control,*
- *data archiving, and*
- *data transfer to the AVOS™ payload.*



AVOS™ BRIDGE INTERFACE

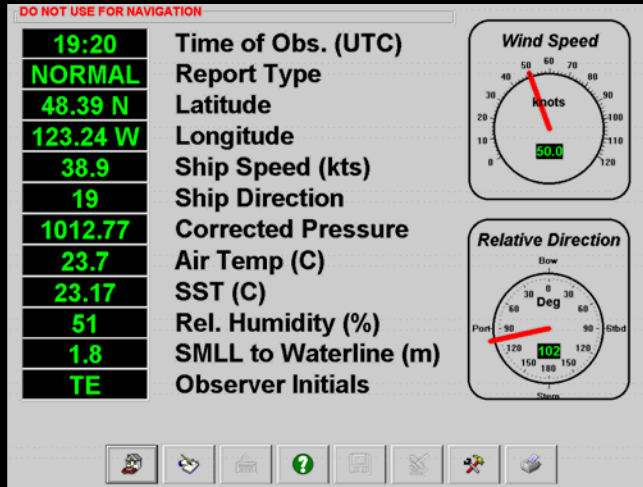

AVOS™ TELEMETRY

INMARSAT C

FM 13-X Format


Synoptic Hours 0000,0600,1200 and 1800 UTC always sent

Intermediate Synoptic within 200 mile zone 0300,0900,1500 and 2100 UTC

SPREP – sent immediately always when significant weather changes are detected.

STORM – wind over 48 kts sent every hour

IMPACT OF AVOST™

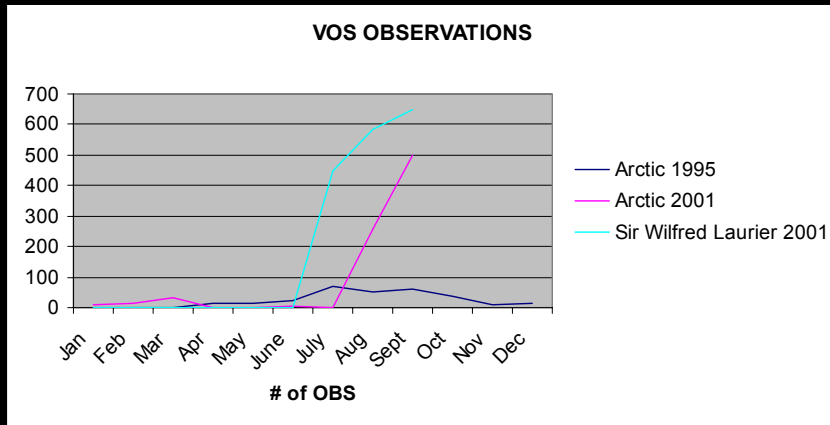

IMPACT OF AVOST™

The Sir Wilfred Laurier made 1681 VOS reports in the first 3 months of use.

Only 3 Canadian VOS ships have reported over 1600 VOS reports in a 12 month period.




Out of 820 observations on the Arctic in 2001 92% have been made since the recent installation of AVOST™.

Historically 20% of Canada's VOS observations have been discarded by QC errors.

No AVOST™ messages have been discarded due to QC



AVOS Results

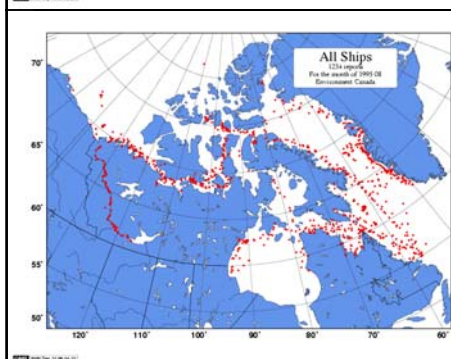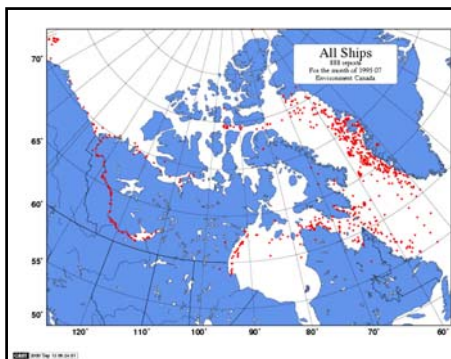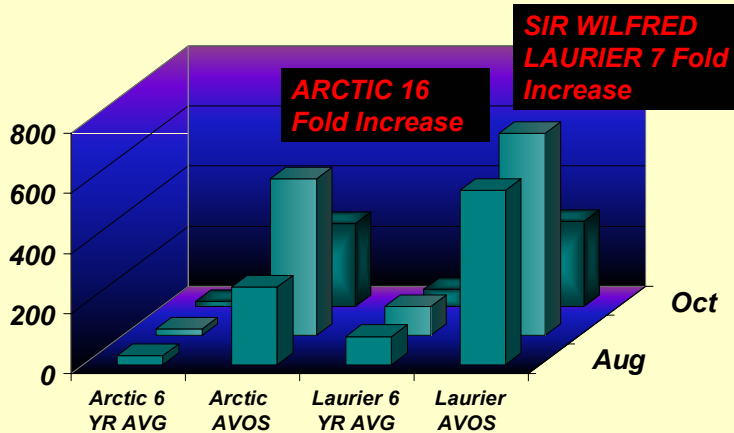

VOS

*In the last few years 92% of the Canadian VOS data was collected by approximately 100 ships.
450 reports annually per ship on average.
50,000 reports a year.*

AVOS™

*75 AVOS ships, 500+ reports a month
500,000 reports a year*

VOSCLIM

13 systems in Canada

Canadian VOS Objectives

*Increase the frequency of VOS reports
50,000 – 500,000*

*Decrease the number of ships
211 - 75*

*Standardize the fleet
AVOS™*

*Improve data quality
VOSCLIM*

*Minimize manual requirement and reduce QC failure rate
AVOS™ Reliability*

Enhance forecasting capabilities

The new OBSJMA

Tadashi ANDO (Japan Meteorological Agency)

1. Introduction


The Japan Meteorological Agency (JMA) developed a software package on meteorological report compilation for voluntary observing ships (VOSs) named "OBSJMA" in 1997. JMA is now upgrading the OBSJMA and plans to distribute it among Japanese VOSs. In this report, the present status and future plans on OBSJMA are introduced.

2. Current OBSJMA

JMA developed OBSJMA in 1997 for easy and accurate compilation of weather reports and marine meteorological logbooks recording by using a personal computer. After trial use by several ships, JMA has distributed OBSJMA and its operating manuals to about 500 ships. At every opportunity, JMA has been making efforts to appeal to VOSs for using OBSJMA: e.g. an article introducing OBSJMA in a JMA's magazine "The Ship and Marine Meteorology".

However, the current OBSJMA has become to be rather old-fashioned because the software was developed on MS-DOS base. For example, keyboard is the only device for data input (i.e. mouse pointer is not available), and it was designed to work on only floppy disk so that relevant visual images, such as types of clouds and sea condition, could not sufficiently be included.

Under these circumstances, the current OBSJMA is not popular among Japanese VOSs. Only 30 or less VOSs have regularly been using the OBSJMA for submitting the meteorological logbooks (Figure 1).

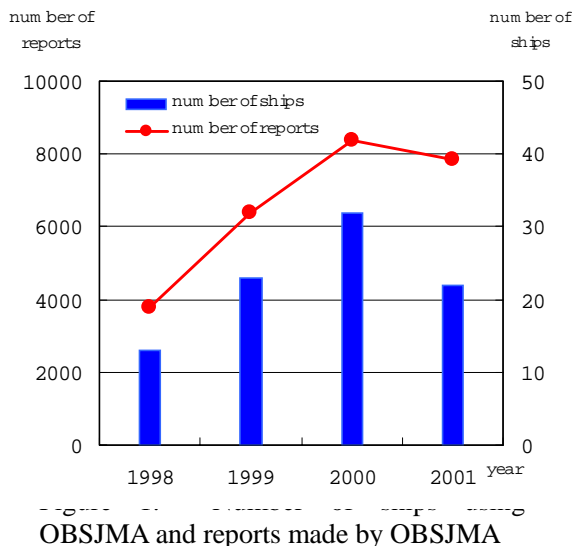

3. The OBSJMA for WIN

The JMA is now upgrading the OBSJMA to Windows edition. The new OBSJMA is called "OBSJMA for WIN". One of the major characteristics of the software is that the main screen is designed to be similar to the "Sheet for Marine Weather Observations" regularly distributed to VOSs by JMA. Observers on board can easily enter weather data on the screen using the mouse pointer. Figure 2 shows examples of screens of the OBSJMA for WIN.

The system requirements, functions and the way of distribution of the OBSJMA for WIN are as follows.

(1) System requirements

- a) Operating System: Windows 95, Windows 98, Windows Me, Windows 2000 and Windows NT 4.0 for Japanese.
- b) Memory: 64 MB RAM
- c) Hard disk: 50 MB
- d) Distributing media: CD-ROM

(2) Functions

The operation of the OBSJMA for WIN is in principle based on that of the current OBSJMA for MS-DOS. The following functions are added.

- a) Mouse pointer is available.
- b) Many color images, such as cloud types, are prepared in the "help" screen.
- c) All the screens are alternative of Japanese or English and are changeable by clicking.
- d) Data are archived in IMMT-2 format.
- e) Meta-data for VOSclim could be input.

(3) Distribution of OBSJMA for WIN

The OBSJMA for WIN will be completed in March 2002, and JMA will distribute it to Japanese VOSs. JMA is to write an article to introduce the software package on the magazine "The Ship and Maritime Meteorology" and the JMA's web page for VOSs. In addition, Port Meteorological Officers are to demonstrate the OBSJMA for WIN when they visit VOSs.

4. Future Plan

Unfortunately the number of submitted meteorological logbooks are decreasing in Japan. The difficulty of weather observation and the decrease of officers/crews are considered to be a major reason for the decreasing of meteorological reports. JMA expects that the OBSJMA for WIN will contribute to reduce the officers/crews' works of making meteorological reports. JMA will constantly keep on revising the OBSJMA for WIN duly reflecting user's comments as much as possible.


Recently almost all the shipping companies and many of ships can use internet. JMA plans to make VOSs available to download the OBSJMA for WIN and relevant documents on meteorological observation/reports via internet.

In connection with the near future use of the Table Driven Codes CREX/BUFR, JMA is considering to add a function to migrate the SHIP messages to CREX/BUFR in the future OBSJMA without any modification of data entry procedure by officers/crews.

Figure 2. Screens of the OBSJMA for WIN

Data entry screen

Help screen for cloud type

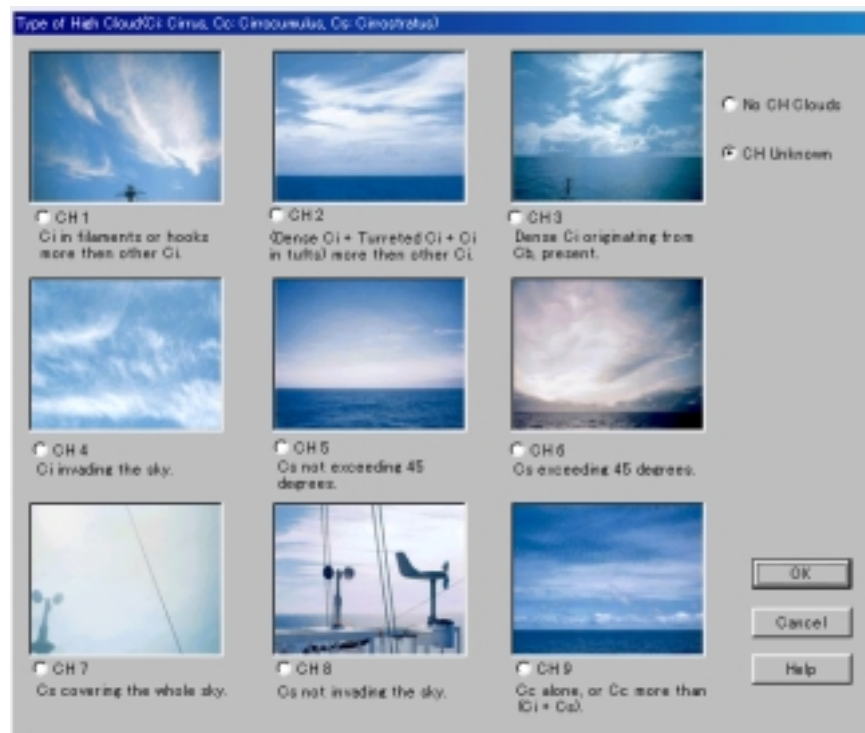

ARGOS SYSTEM, APPLICATIONS & ENHANCEMENTS

February 2002
Christian Ortega
CLS

Collecte Localisation Satellites, 8 – 10 rue Hermès,
Parc Technologique du Canal, 31526 Ramonville, France
tel: +33 561 39 47 20 / fax: +33 561 39 47 97 / email: ortega@cls.fr

ARGOS SYSTEM OVERVIEW

The Argos data collection and location system was established in 1978 by the National Oceanic and Atmospheric Administration (NOAA, USA), the National Aeronautics and Space Administration (NASA, USA), and the French space agency (CNES, France). Argos, was developed specifically for scientists to study the environment.

Argos can locate any platform carrying a suitable transmitter, anywhere in the world, and collect data from sensors connected to the transmitter.

The Argos system is operated and managed by:

- CLS, a CNES subsidiary in Toulouse, France
- Service Argos, Inc. (SAI), a CLS subsidiary in Largo, MD, near Washington, DC, USA
- worldwide subsidiaries

Over the last 20 years, Argos has evolved continually to keep pace with the needs of scientific research and applications dedicated to observing, monitoring and protecting planet Earth.



Figure 1: Argos is flown onboard the NOAA polar orbiting satellites (5 satellites as of today), and will also fly on NASDA and EUMETSAT polar orbiting satellites.

ARGOS APPLICATIONS

Half of the Argos system capacity is used for ocean, climate research applications. Many of these data are also used as input for operational meteorology and, as progress is made towards an observing system for the oceans, for operational oceanography. Argos applications also include animal tracking, oil spill tracking, monitoring equipment at sea, hydrology, fish stock management and hazardous cargo monitoring.

OCEAN APPLICATIONS

In the last six years, 5,000 drifting buoys, 1,500 deep floats, and 300 moored buoys and fixed stations, fitted with Argos transmitters, have measured the ocean currents and sent millions of measurements of atmospheric pressure, wind speed and direction, sea temperature and more. They have been important components of the operational WWW and WCRP programs, through TOGA, WOCE and now GOOS/GCOS, CLIVAR and GODAE programs and experiments.

ARGOS ON SOOP AND VOS

Argos have been used on ships since 1987 to collect SHIP and XBT observations.

Today some 20 ships equipped by French IRD and Australian BOM-CSIRO are fitted with Argos systems, of which 10 to 12 relay profiles every month. Temperature profiles data are validated by the shipboard software, inflexion points are calculated and coded in an Argos message. Messages are processed, quality controlled by the Argos GTS sub-system and sent to MeteoFrance for GTS insertion. In December 2001, 322 XBTs were inserted onto GTS.

Similarly, 4 PAB units from the BOM are sending SHIP observations. These units combine automatic measurements of atmospheric pressure, air and sea temperature, and manually-input observations. These data are validated in Argos centers, coded in SHIP and relayed to the GTS.

MeteoFrance has developed a basic weather station for VOS called Minos, which collects atmospheric pressure and air temperature. As a major advantage, this low-cost station can be installed in a couple of hours.



Figure 2: Minos : self-contained Argos telemetry station with atmospheric pressure, air temperature sensors, GPS, and data display unit for crew members.

ARGOS ENHANCEMENTS

Most fundamental changes are in the satellite segment and are planned years in advance. Two important decisions have been taken regarding the future of the Argos space segment:

- CNES has given the go-ahead for development of a third-generation Argos instrument to enter service in 2005. This instrument will offer significant enhancements, including better sensitivity, faster data transmission, and increased data collection capacity.
- CNES and NOAA are consolidating the Argos system's global reach by extending their partnership agreement to include two new major partners: Japan, represented by its national space agency NASDA, and Europe, represented by EUMETSAT. Partnership agreement with the Brazilian space agency, INPE, is on its way too.

The current launch schedule for the satellites carrying the Argos instruments is:

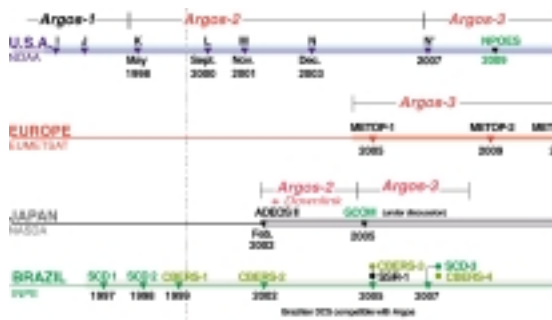


Figure 3: New satellites launches for the Argos system are already planned until 2012.

TWO-WAY COMMUNICATION

Two-way communication with Argos transmitters, also known as downlink messaging, will start with the ADEOS-II satellite, from late 2002.

Typical applications will be switching a transmitter on or off, or modifying a sensor sampling rate.

Users will connect to Argos servers via the web, and program the information they want their platforms to receive. The downlink will also provide uplink message acknowledgement.

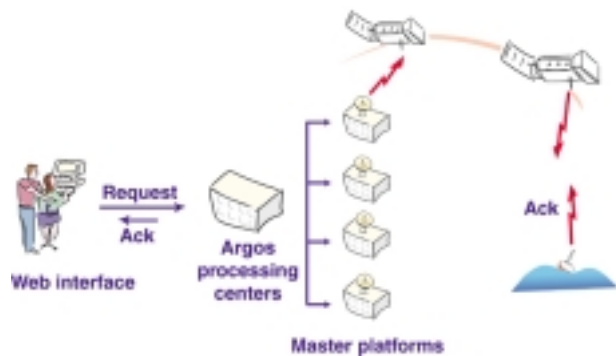


Figure 4: Argos users will send command to their platforms through a web interface and the satellite link.

INCREASING DATA BANDWIDTH

The Argos-2 generation, now flying on NOAA-15 & 16, can receive greater than three times more platform messages simultaneously than previous satellites. The improvement is due to a doubling of the number of Data Recovery Units on board the satellite and a tripling of the Argos frequency bandwidth.

The Argos system in use today includes redundant transmissions to increase the probability of error-free data receipt by the satellite. The two-way communication capability outlined above will enable the number of repetitive messages to be reduced by a factor 2 by including an "Acknowledgement" signal which will indicate when the data has been successfully received by the satellite.

The Argos-3 generation will feature a 4800 bps high data rate channel, ten times more data transfer than the current channel. This will, for example, match the ARGO float data relay requirements in a single satellite pass.

WEB SITES

<http://www.argosinc.com/>

-

REALTIME COVERAGE

THE MISSION CONTINUES

Argos has been serving users for more than 20 years, in a spirit of worldwide cooperation. The best example of this is the way the system continues to evolve as a partnership between its users and operators. The enhancements described above will enable the Argos user community to satisfy increasingly difficult data relay needs with a proven, reliable and robust data collection system as Argos continues its Earth observation and monitoring mission into the next century.



30th January 2002

NEW MARITIME SAFETY AND COMMERCIAL SERVICES IN 2002

JOINT WMO/IOC TECHNICAL COMMISSION FOR OCEANOGRAPHY AND MARINE
METEOROLOGY (JCOMM) SHIP OBSERVATIONS TEAM.

25 February- 2 March 2002, Goa, India

Brief notes on existing services

Inmarsat operates four communication systems Inmarsat A, Inmarsat B, InmarsatC, Inmarsat mini-M and Inmarsat E distress alerting system which are the right choice for safety at sea and commercial communications.

Inmarsat A is the original analogue Inmarsat satellite communication system that provides voice, telex, fax, data (9.6 kbit/sec) and high speed data (56/64 kbit/sec) services. The system is GMDSS compliant and provides telephone and telex distress calling to a Rescue Coordination Centre.

Inmarsat B is a digital successor to Inmarsat A and offers similar capabilities but with more efficient use of the resources and low call charges. The system is also GMDSS compliant and provides telephone and telex distress calling to a Rescue Coordination Centre.

Inmarsat C is a cornerstone of the GMDSS supporting 5 out of 9 communication functions defined in the IMO SOLAS Convention, Chapter IV. It is a packet data communication system providing store and forward messaging including e-mailing, distress alerting and distress priority messaging to associated Rescue Coordination Centres, reception of maritime safety information via the International SafetyNET service, data reporting and polling service. It is also very important that Inmarsat C is used to send messages to a short code or two-digit address, e.g. sending meteorological reports, navigational hazards and warnings, request for medical advice and medical assistance, requests for search and rescue assistance and sending ship position reports to shore authorities.

EGC SafetyNET provides an efficient and low-cost means of transmitting maritime safety information to vessels at sea and is used by meteorological, hydrographic, search and rescue and coastguard co-ordination authorities. Messages are addressed to ships at sea using IMO defined NAVAREAs/METAREAs, coastal areas or sea areas defined by a circular, e.g. area around vessel in distress or rectangular area.

Inmarsat mini-M is the smallest, lightweight and cost effective satellite communication system that provides high quality voice, data, fax and e-mail services at the speed of 9.6 kbit/sec. It operates via Inmarsat spot beams in four ocean regions like a cellular phone with maritime coverage. The system is small in size and low weight and can be easily installed on smaller maritime users. Inmarsat Mini-M is not GMDSS compliant and does not support safety services.

Inmarsat E is an Emergency Position Indicating Radio Beacon (EPIRB) system which provides distress alerting capability via Inmarsat satellites. Distress alerts are handled automatically and received at associated Rescue Coordination Centres within, typically, two minutes after activation. Inmarsat E EPIRBs have built-in Global Positioning System (GPS) receivers, which provide accurate distress position information and are small and lightweight enough to be installed on smaller vessels. Two Land Earth Stations in each out of four Inmarsat ocean regions give 100% redundancy in case of failure or outages associated with any of the LESs.

The Inmarsat E system supports “Float Free” EPIRBs which incorporate the following features: integrated GPS receiver which is accurate to within 200 metres; automatic activation when the EPIRB is hydrostatically released by “floating free”; remote activation and information input from vessels bridge or other manned situation; optional Search and Rescue Radar Transponder (SART); optional 121.5MHz locator beacon; high intensity, low duty cycle flashing light.

WHAT IS NEW

Inmarsat Fleet

Inmarsat Fleet F77, unveiled at Europort exhibition in November 2001, is the first in new family of Inmarsat services for the maritime industry in eight years and brings a new dimension to maritime safety. Fleet F77 is the only service that meets the International Maritime Organisation’s latest requirements – IMO Resolution A.888(21) “Criteria for the provision of mobile satellite communication systems in the Global Maritime Distress and Safety System (GMDSS)”, by providing voice prioritisation and pre-emption.

This essential new prioritisation function comes as standard on Fleet F77 and allows the interruption and clearing of lower priority communications and routine calls to give way to voice communication for high priority distress, urgency and safety needs. The Resolution A.888(21) states that any system being designed for use in the GMDSS after 1 February 1999 should be able to recognise the four levels of priority in both ship-to-shore and shore-to-ship directions:

- Distress;
- Urgency;
- Safety; and
- Other (general/routine) communications

Rescue authorities calling a vessel equipped with Fleet F77 will always be able to contact a ship, even if the voice or data channel is in continuous use at a lower priority. Not only will pre-emption work seamlessly, it will always work in a hierarchical manner: Distress priority P3 call will pre-empt all other communications; Urgency priority P2 call will pre-empt both safety P1 and routine P0 calls; and Safety priority P2 call will pre-empt a routine P0 call.

The introduction of Fleet F77 to the Inmarsat communications portfolio reinforces their continued commitment to the provision of international maritime safety. In addition, Inmarsat consistently exceeds the minimum IMO requirement for 99.9% system availability for ship-shore distress alerts.

The new IMO criteria were formulated following a maritime rescue incident in November 1994. The passenger liner “Achille Lauro” caught fire and sank off the coast of Somalia. The majority of the passengers (930) were subsequently rescued by the tanker “Hawaiian King”, and the tanker “Chevron Perth” rescued a further 133. Upon being rescued, the survivors were keen to contact family and friends to let them know they were safe and well. In addition, the world’s press was also keen to talk to survivors, to get first-hand accounts of the incident.

The subsequent increase in usage of the Inmarsat A terminal onboard the “Hawaiian King” prevented the Maritime Rescue Co-ordination Centre (MRCC) from contacting the ship. The situation was safely resolved by the MRCC using additional Inmarsat safety equipment, Inmarsat C, to alert the “Hawaiian King” to clear the voice channel on their Inmarsat A for safety communications.

Fleet F77 was at the design stage at the same time that the Resolution A.888(21) was being drafted. Once the new requirements were made clear, Inmarsat incorporated these into the design of Fleet F77. Provision of pre-emption in both directions also means that Inmarsat land earth station operators (LESOs), which provide Fleet F77 services, are capable of offering this valuable safety service.

In addition to an advanced safety service, Fleet F77 will also deliver a wide range of commercial communications needs; voice, fax and data services at speeds of up to 64 kbit/s, including mobile ISDN and mobile packet data service (MPDS), where users are charged for the amount of information sent and received rather than the time for which they are connected. This will enable mariners to send and receive information on real-time basis, rather than the traditional practice of logging on once or twice a day.

Selection of mobile ISDN or MPDS depends on what a maritime user wants to send or receive. As a general rule, the mobile ISDN service is best used when transmitting large files or if a data speed of the utmost importance. The MPDS can be more efficient for applications that are interactive in nature such as e-mail, web or Intranet access.

Fleet F77 supports a range of powerful new applications through its high speed data capability which include secure access to information online, image transfer, video and digital image communications. Fleet77 also delivers e-mail, Internet and Intranet access plus a choice of two fax services. Some of maritime specific applications include graphical ocean charts and weather displays, navigational chart updates, database queries, accessing online safety information, telemedicine, vessel’s telemetry transmission.

Inmarsat mini-C

Inmarsat mini-C is a low-power and compact communications solution for small vessel markets such as fishing vessels, yachting, inland waterways. Mini-C is an evolution of the existing Inmarsat C technology and supports all standard services combined with a significantly reduced level of power consumption. Low power consumption also offers the possibility of using a solar-fed battery power source where required.

Inmarsat mini-C offers two-way messaging and e-mailing, position reporting and polling, ship-to-ship communications. This makes mini-C an ideal portable and inexpensive solution to fulfill basic messaging, tracking and security communications requirements for small maritime users.

Mini-C provides ship-to-shore and shore-to-ship telex and e-mail communications, position reporting and tracking applications, short access code address messaging for maritime safety services such as sending meteorological reports to meteorological centers, sending navigational hazards and warnings, request for medical advice and assistance, sending position reports to shore authority.

In future an enhanced Inmarsat mini-C model, to be available in early 2002, will also provide emergency alerting for non-SOLAS ships and reception of maritime safety information via the EGC SafetyNET service. In the merchant marine sector, it can also deliver commercial information for shipping and transport companies, fishing and merchant fleet data applications, anti-piracy and navigation aids. Inmarsat mini-C can also be installed as supplementary terminals for crew communications, to complement existing communications services onboard.

Vladimir Maksimov
Manager, Maritime Safety Operations
Inmarsat
99 City Road
London EC1Y 1AX
United Kingdom

Tel: +44 20 77281095
Fax: +44 20 77281752
E-mail: vladimir_maksimov@inmarsat.com

RESULTS OF FIELD TESTS OF THE NEW XCTD-2

Tomowo Watanabe* and Michio Sekimoto**

*Tohoku National Fisheries Research Institute
Shinhama 3-27-5, Shiogama 985-001, Japan

**Tsurumi Seiki Co., LTD
Tsurumi Chuo 2-2-20, Tsurumi-Ku
Yokohama 230-0051, Japan

ABSTRACT

The eXpendable Conductivity, Temperature, and Depth profiler for temperature and salinity observations to a depth of 1,850 m (XCTD-2) was tested during the MR01-K04 cruise of the research vessel R/V MIRAI in the summer of 2001. The new, deep-water probe was recently developed by the Tsurumi-Seiki Co., LTD. Field tests of the XCTD-2 are indispensable for determining the depth-time equation and evaluating instrument accuracy. On the cruise, 12 probes were launched during CTD up-casts at 11 CTD stations. By using the pairs of XCTD and CTD profiles, the depth-time equation was estimated as $D = 3.4005t - 3.2 \times 10^{-4}t^2$, where D is the depth in meters and t is the elapsed time after the probe hits the sea surface. The temperature and salinity differences from CTD observations in the deep layer of 1000m to 1500m were -0.001°C and -0.008psu respectively. Standard deviations were 0.018°C and 0.013psu . These values indicate that the XCTD-2 is a useful addition to the XCTD system.

Introduction

The expendable conductivity temperature depth profiler (XCTD) system was developed in the 1990's and was released for general use for 1000m observation in 1997 by Tsurumi Seiki CO. LTD (TSK). At an early stage, a positive salinity bias and slow adjustment just after launch were recognized as points which should be improved (Mizuno and Watanabe, 1998). TSK has addressed these issues with significant design changes to the original XCTD observation system. TSK also received requests for development of a new model for deeper use and initiated development of an XCTD probe for 2000m observations (XCTD-2).

Field experiments of the XCTD-2 were conducted in the summer of 2001, taking advantage of participation in the MR01-K04 cruise of R/V Mirai conducted by

Japan Marine Science and Technology Center (JAMSTEC). This allowed comparison of profiles observed by XCTD-2 with high precision CTD profiles. The cruise was conducted to revisit the WHP-P17 and high precision CTD observations from the sea surface to the bottom were successfully performed at each station. The purposes of the field tests were to develop a depth-time equation for the new XCTD probe and to evaluate the accuracy of XCTD-2 observations.

Design of the XCTD-2 system

The basic structure of the XCTD-2 probe is very similar to the current model for 1000m-observation (XCTD-1) as shown in Mizuno and Watanabe (1998). The major differences are wire length and the wire diameter. The diameter of the wire is 0.07mm, which is 0.02mm thinner than that of the XCTD-1. The length of the wire stored in the canister and the probe are 1200m and 1900m, respectively. TSK estimated that the available observation depth was 1830m at 3.5 kt of ship speed. A highly efficient digital filter was installed in the MK-100 XCTD digital converter, in order to cope with the increased noise introduced by longer data transmission distances.

In-situ comparison tests

The MK-100 converter with revised ROM and a PC were placed in a room behind the ship wheelhouse. A hand launcher was installed at the stern, about 50m from the CTD. In order to make XCTD-CTD concurrent observations, the XCTD probes were launched when the CTD-sonde reached a depth range of from 500m to 300m during up-casts.

The tests were performed at CTD stations including two training points and nine WHP-P17 revisit stations along the 135°W meridian as shown in Figure 1. The information and results of the observations are summarized in Table 1.

Nine of the 12 tests were successful. One failure was due to operator error, one to hand launcher malfunction, and one to a wire break caused by the ship propeller.

Data processing

The software for the XCTD observation was a version of the current program revised to allow deeper profiles. Initially, the depth-time equation for the XCTD-1 was used. Later, using the XCTD and CTD profiles obtained at the first training station at 39N, 179W, a temporary depth-time equation was determined according to the method adopted by Hanawa et al. (1995).

Finally, all of the profiles were converted with the temporary depth-time

equation and were then compared with CTD profiles. Again using the method adopted by Hanawa et al. (1995), the final depth-time equation was developed utilizing a comparison to the CTD standard gradient profiles to eliminate temperature errors. The method is based on minimizing the differences between the CTD and XCTD temperature gradient profiles at the center of fixed depth-window intervals. The least squares method was then used to determine the quadratic equation coefficients for each window and the mean of all the values was calculated to determine the general coefficients.

Depth-time equation

The depth-time equation is in the form, $D = at + bt^2$, where D is the depth in meters and t is the elapsed time in seconds after the probe hits the sea surface. The depth-time equation obtained for each test is shown in table 2. Averaged values of coefficients a and b were adopted for the general equation as described in the section above. The depth-time equation for XCTD-2 was then determined to be:

$$D = 3.4005t - 3.2 \times 10^{-4}t^2$$

Figure 2 shows the depth difference of each equation from the averaged equation. The standard deviation of the depth difference at 560 sec (about 1800m by averaged equation) is 14m and difference at 305 sec (about 1000m) is 4.2m.

Temperature/salinity comparison

Temperature and salinity profiles for all XCTD-2 data were calculated by using the depth-time equation. Each profile is shown in Figure 3 with the corresponding CTD profile and T-S diagrams are shown in Figure 4. As seen in figure 3, the XCTD-2 profiles follow the CTD profiles well. The temperature and salinity differences averaged for the deep layer from 1000m to 1500m were calculated and summarized in table 2. The mean value of differences was -0.001°C for temperature and -0.008psu for salinity. The standard deviations were 0.018°C and 0.013psu , respectively. These values are better than the initial evaluation of model XCTD-1 by Mizuno and Watanabe (1998). These statistical values meet the specification presented by the manufacturer.

The temperature and salinity sections observed by XCTD-2 along WHP-P17 line from 30°N to 41°N were constructed and are shown in figure 5 and 6. The CTD sections and the difference between the XCTD and CTD observations are attached for comparison. The detailed structure of subsurface temperature fields are captured quite

well by the XCTD-2. As to the salinity field, the structure of the water mass distribution can be evaluated by XCTD salinity section. However, the influence of the variation in accuracy of each probe within the range ± 0.02 appears as an unnatural undulation of the 34.5 psu contour line in the deep layer. The salinity field in the deeper layer where the vertical gradient is small should be interpreted with careful consideration of the accuracy of the salinity measurement of the XCTD.

Acknowledgements

This study was financially supported by the Ministry of Education, Culture, Sports, Science and Technology under the “SubArctic Gyre Experiment in North Pacific” project. We express our appreciation to Dr. Masao Fukasawa who was the chief scientist of the MR01-K04 cruise of the R/V Mirai. We also wish to thank Captain Akamine and the crew of R/V Mirai for their cooperation with the fieldwork.

References

- Hanawa, K., P. Rual, R. Bailey, A. Sy and M. Szabados (1995): New depth-time equation for Sippican or TSK T-7, T-6, and T-4 expendable bathythermographs (XBT). *Deep Sea Res.*, 42,1423-1451.
- Mizuno, K. and T. Watanabe (1998): Preliminary Results of in-situ XCTD/CTD comparison test. *J. Oceanogr.* 54,373-380.

Table 1 XCTD-2 test stations

Station	Date (UT)	Time	Latitude		Longitude		S/N	Depth
TR01S02	2001/07/31	04:43	39-03.19	N	179-49.52	W	#01075609	1823
TR02S02	2001/08/04	16:03	31-01.88	N	150-01.40	W	#01075619	-
P17C26	2001/08/06	21:55	30-00.06	N	134-59.81	W	#01075620	1047
P17C23	2001/08/07	13:12	31-31.94	N	135-00.12	W	#01075618	1824
P17C21	2001/08/08	00:01	32-36.53	N	135-00.71	W	#01075615	405
P17C21	2001/08/08	00:11	32-36.59	N	135-00.74	W	#01075616	1819
P17C18	2001/08/08	15:48	34-04.47	N	134-59.78	W	#01075612	1810
P17N29	2001/08/09	02:49	34-59.36	N	135-01.01	W	#01075617	1824
P17N32	2001/08/10	01:26	36-30.01	N	135-00.68	W	#01075613	1842
P17N35	2001/08/10	18:18	38-00.34	N	135-00.99	W	#01075614	1803
P17N39	2001/08/11	15:03	39-37.17	N	135-01.20	W	#01075610	1833
P17N46	2001/08/13	00:29	40-58.83	N	134-58.60	W	#01075611	1824

Table 2. Depth-time equation for XCTD-2 and temperature and salinity differences between XCTD-2 and CTD observations averaged for the depth range 1000-1500m.

Station	Time-Depth Equation	Temp. dif.	Sal. Dif.	S/N
TR01S02	$D = 3.40316t - 0.00029t^2$	-0.010	0.001	#01075609
TR02S02	-----	-----	-----	#01075619
P17C26	-----	-----	-----	#01075620
P17C23	$D = 3.43509t - 0.00044t^2$	0.002	-0.001	#01075618
P17C21	-----	-----	-----	#01075615
P17C21	$D = 3.44297t - 0.00043t^2$	0.004	-0.027	#01075616
P17C18	$D = 3.40269t - 0.00039t^2$	0.021	-0.030	#01075612
P17N29	$D = 3.37367t - 0.00032t^2$	0.018	-0.005	#01075617
P17N32	$D = 3.40348t - 0.00025t^2$	-0.039	-0.010	#01075613
P17N35	$D = 3.38351t - 0.00027t^2$	-0.012	0.013	#01075614
P17N39	$D = 3.36603t - 0.00023t^2$	0.001	-0.017	#01075610
P17N46	$D = 3.39365t - 0.00030t^2$	0.004	-0.017	#01075611
Mean	$D = 3.40047t - 0.00032t^2$	-0.001	-0.008	
S.D.	(0.02565)(0.00008)	(0.018)	(0.013)	

Figure caption

Figure 1

Location of CTD/XCTD stations for XCTD-2 tests (●) and MR01-K04 stations (○).

Figure 2

Difference from averaged depth-time equation.

Figure 3

Vertical temperature and salinity profiles of XCTD-2/CTD.

Figure 4

T-S diagrams for XCTD-2/CTD.

Figure 5

- a) Vertical temperature section along 135W observed by XCTD-2.**
- b) Vertical temperature section along 135W observed by CTD.**
- c) Temperature difference section along 135W, XCTD-2 – CTD.**

Figure 6

- a) Vertical salinity section along 135W observed by XCTD-2.**
- b) Vertical salinity section along 135W observed by CTD.**
- c) Salinity difference section along 135W, XCTD-2 – CTD.**

Figure 1

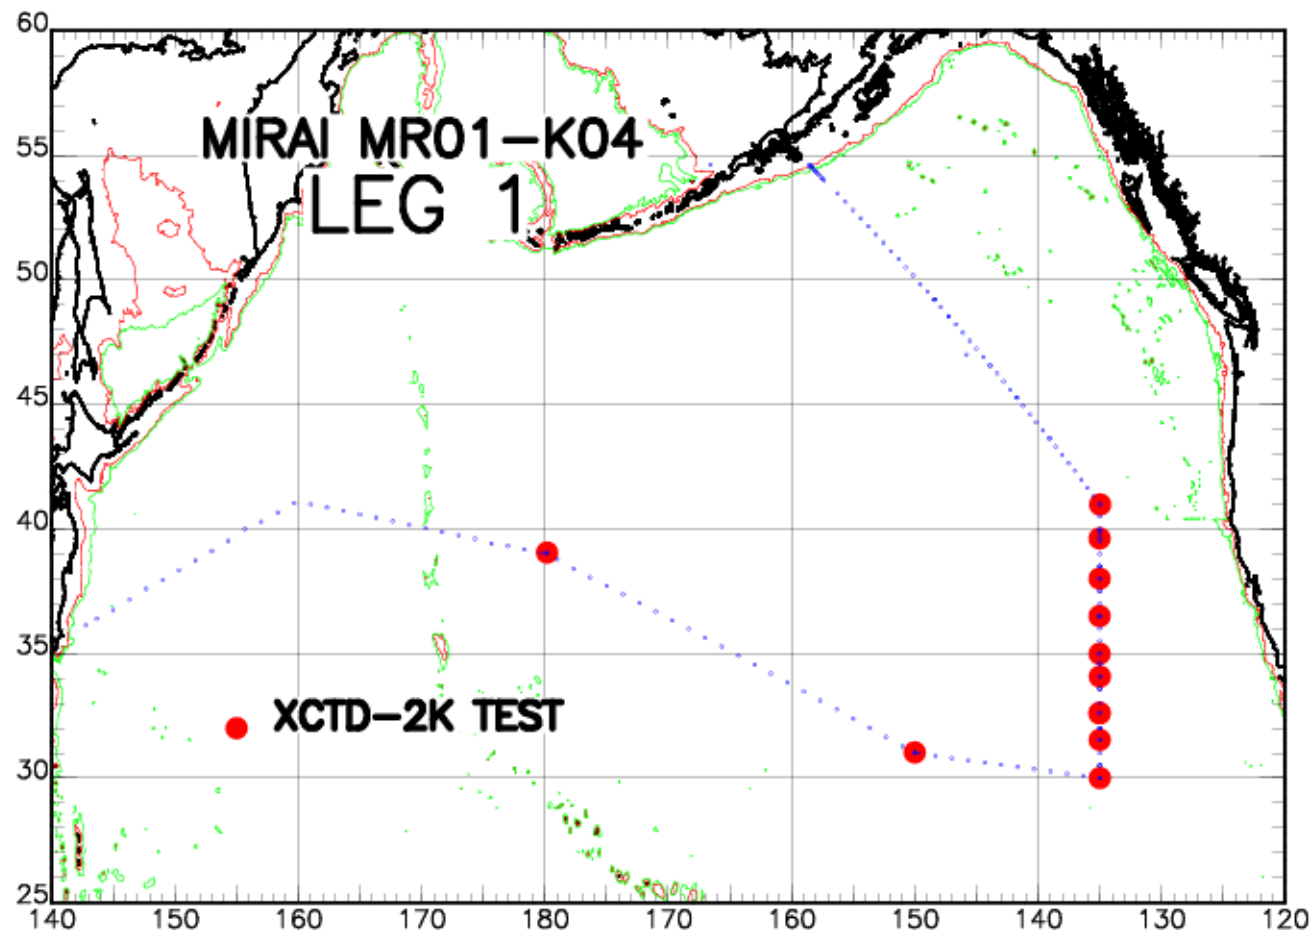


Figure 2

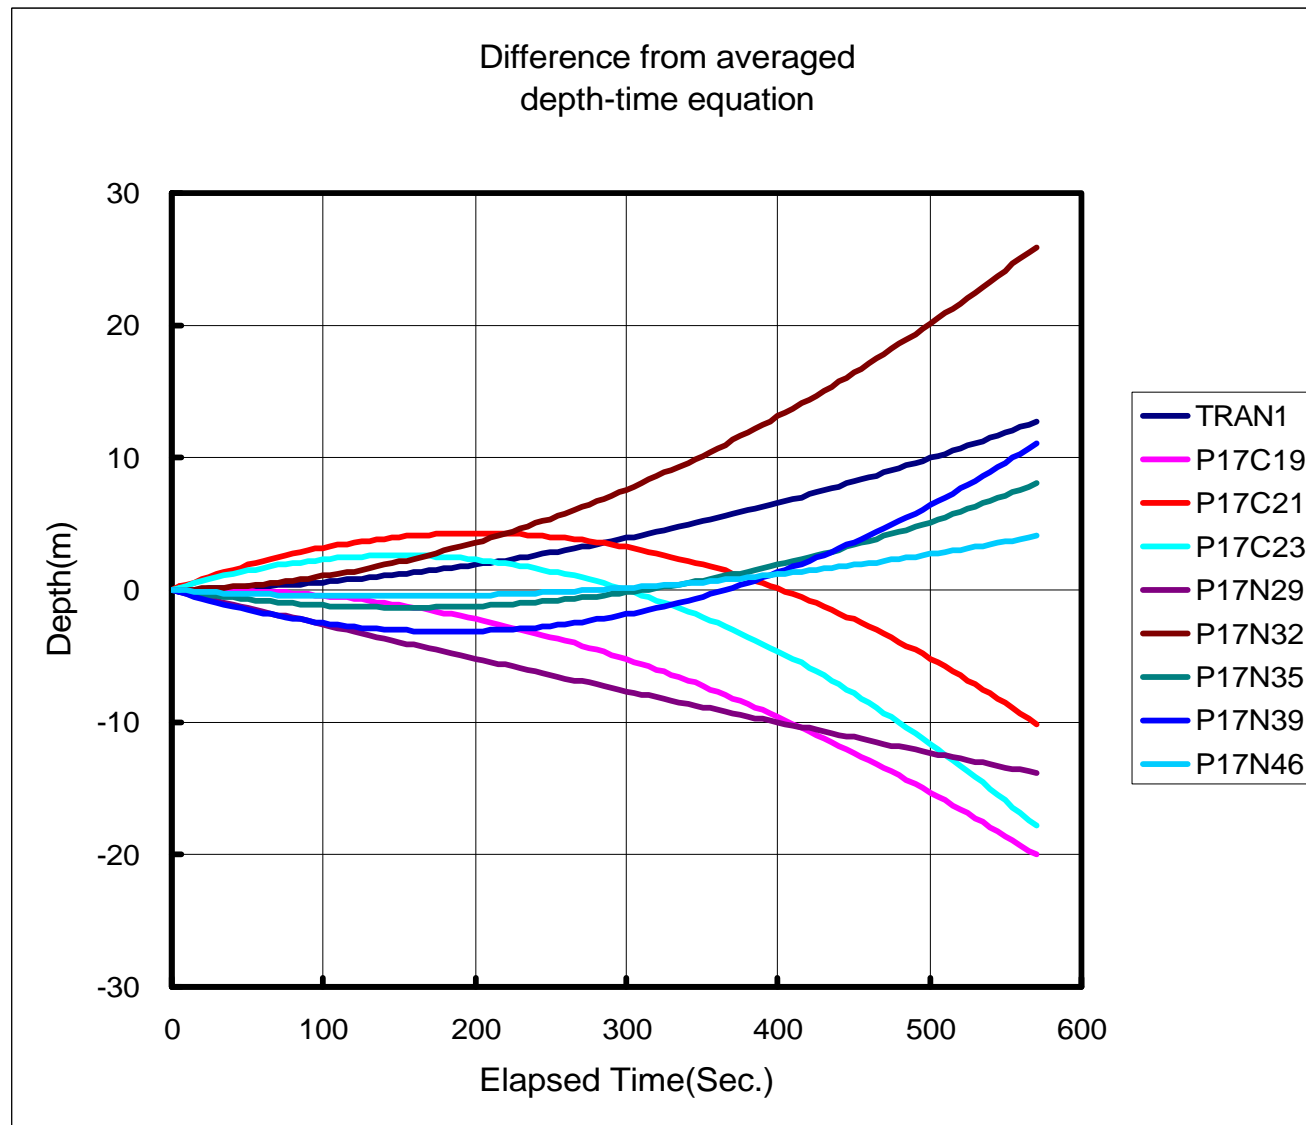


Figure 3

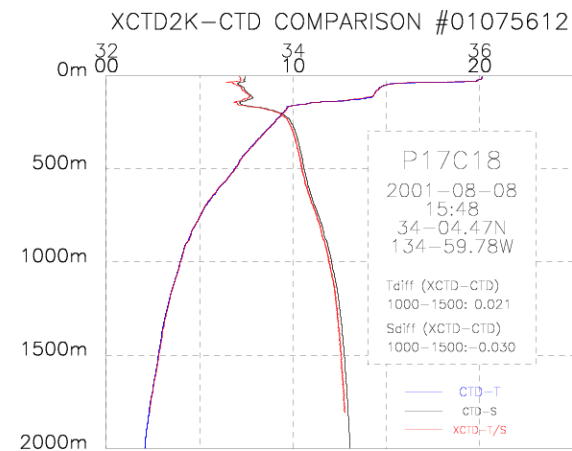
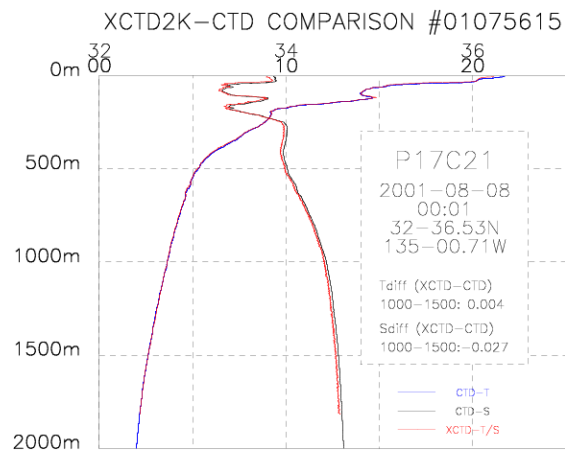
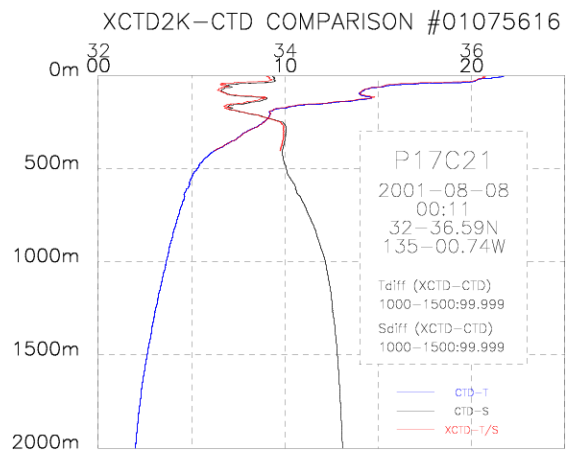
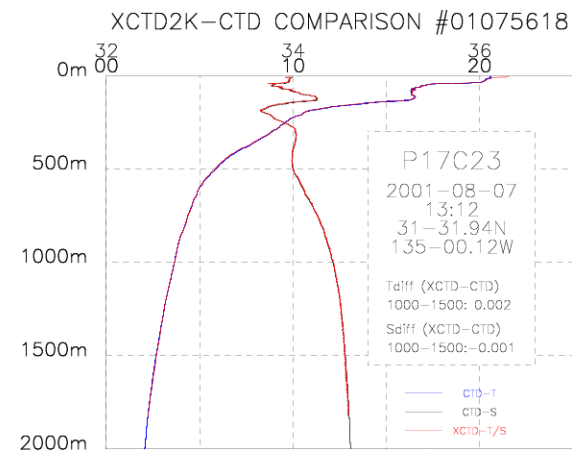
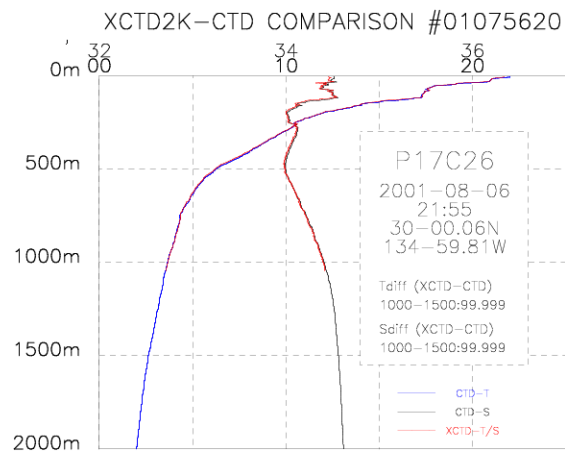
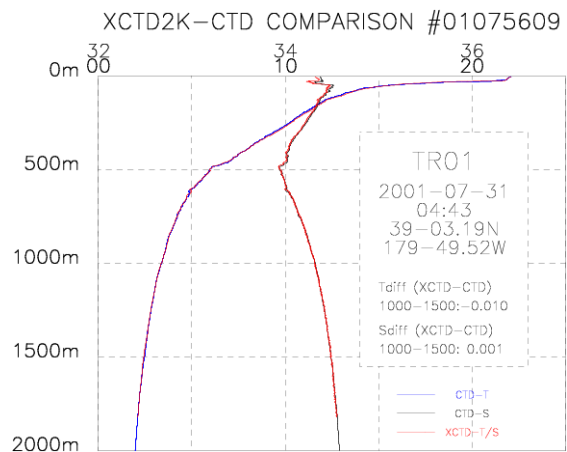


Figure 3

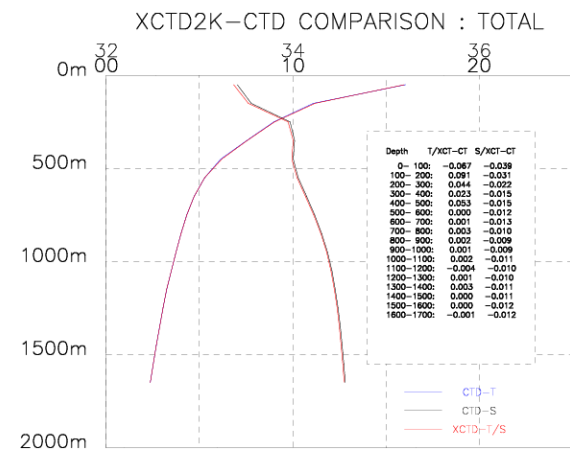
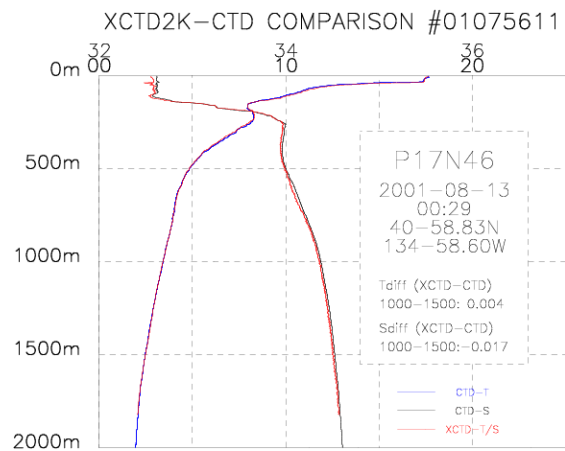
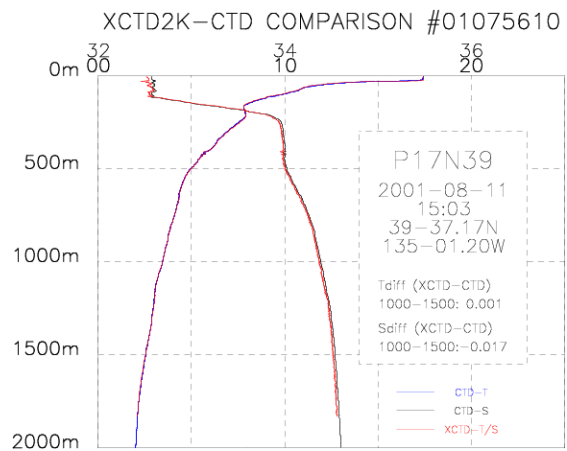
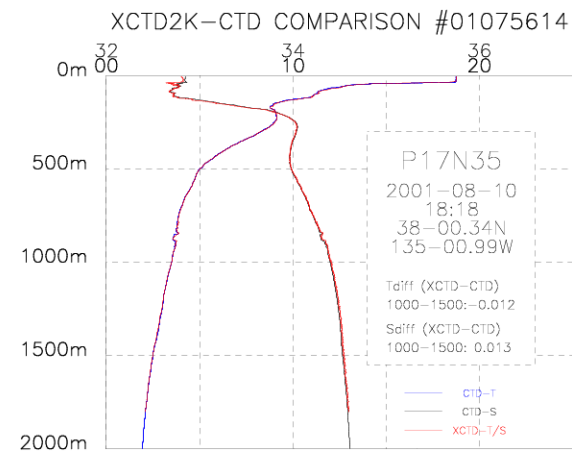
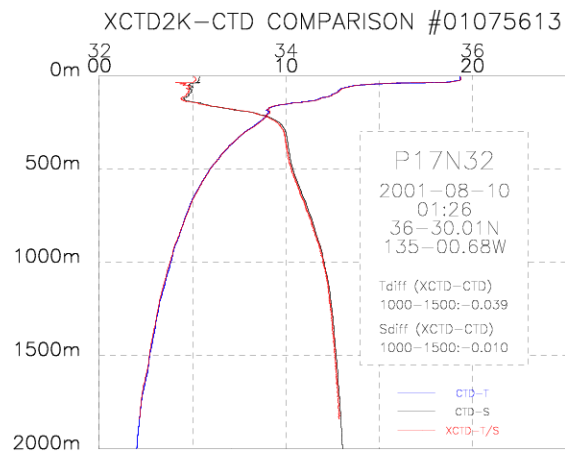
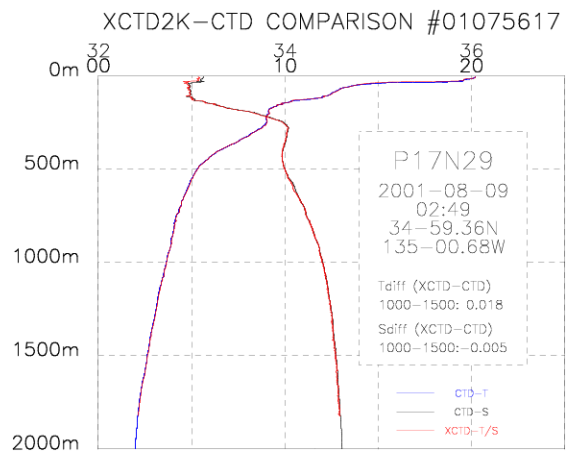


Figure 4

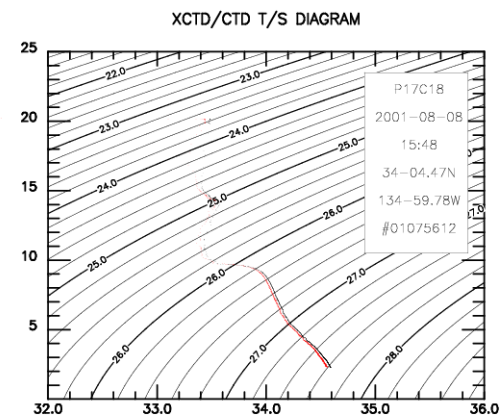
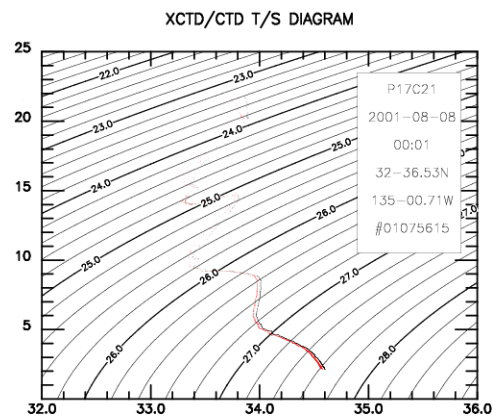
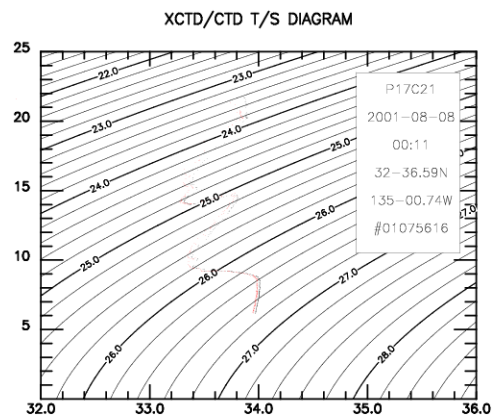
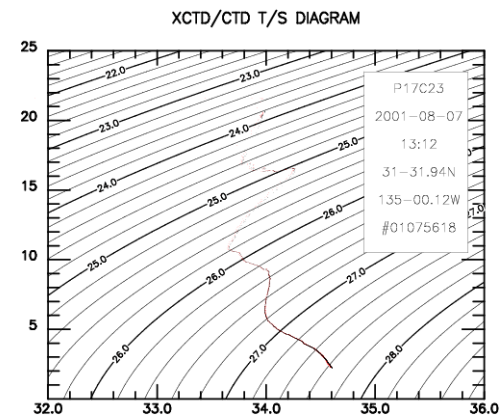
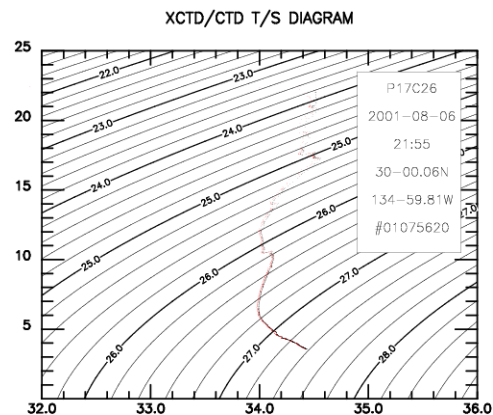
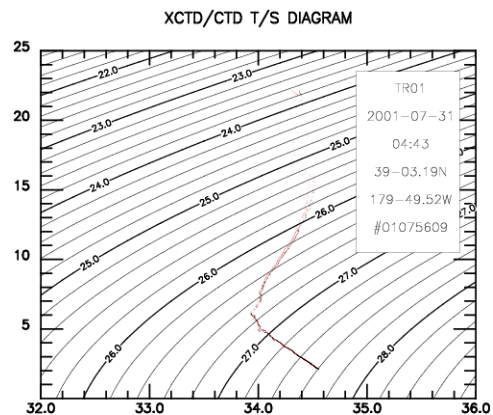


Figure 4

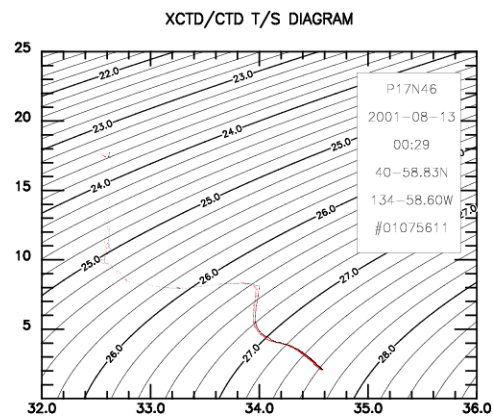
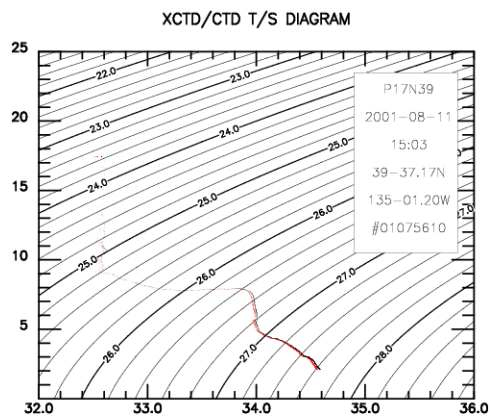
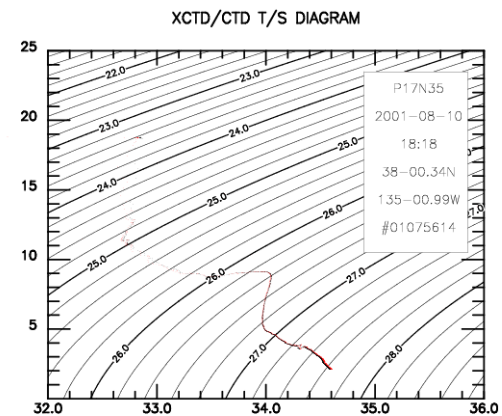
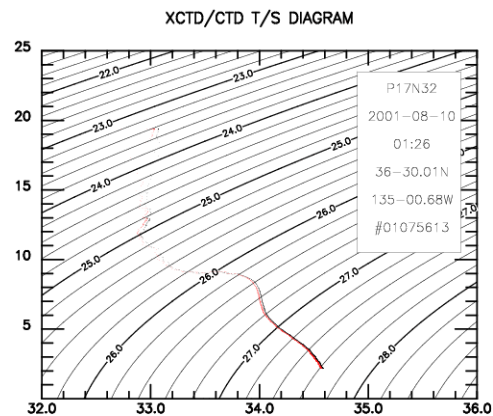
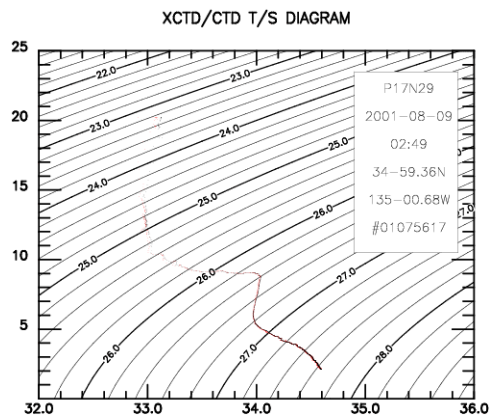


Figure 5


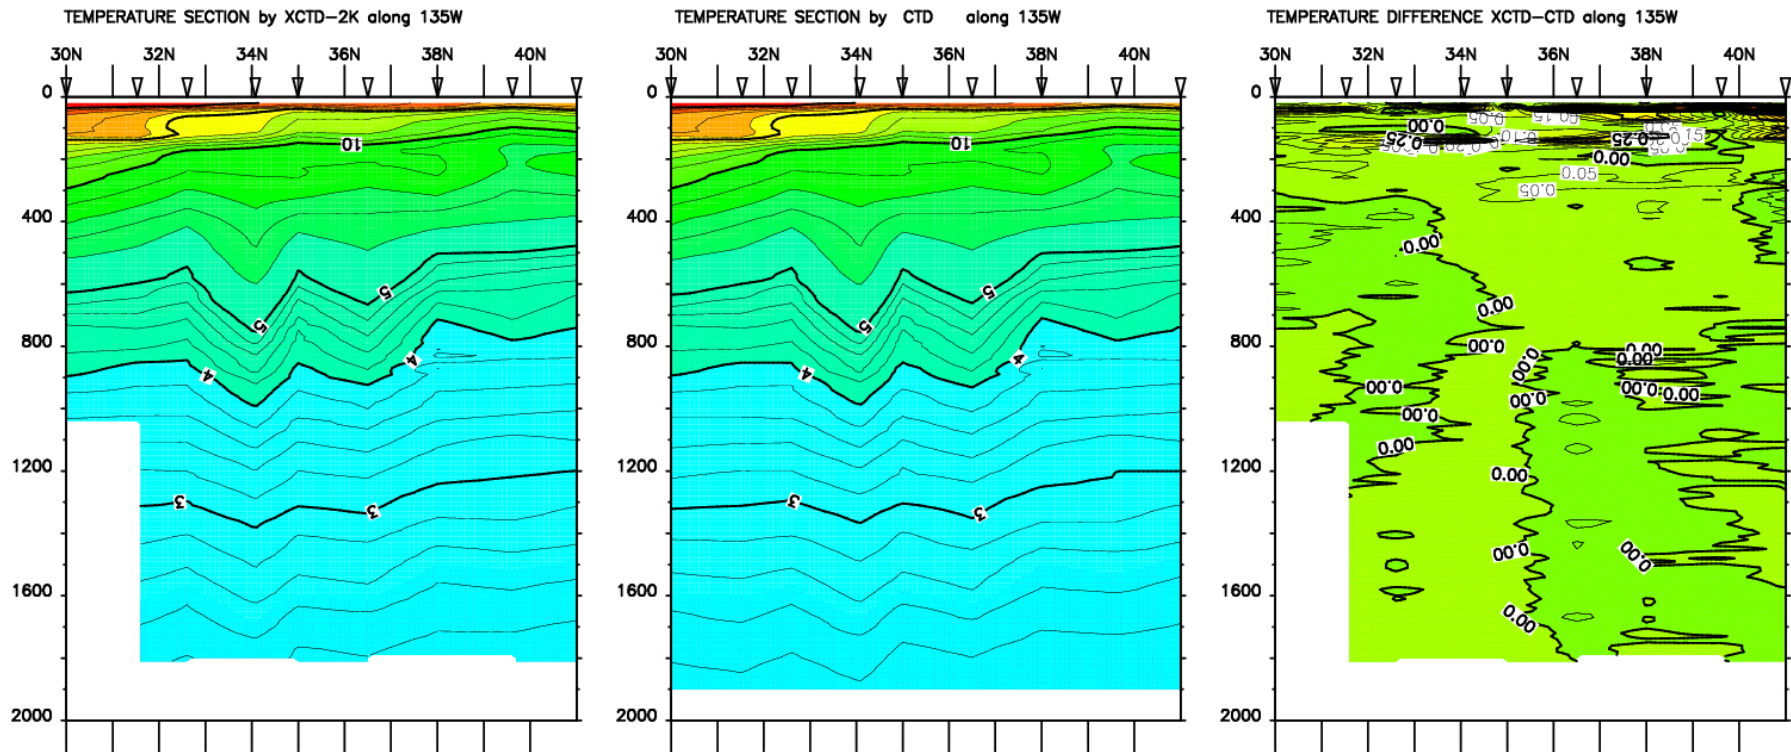


Figure 6

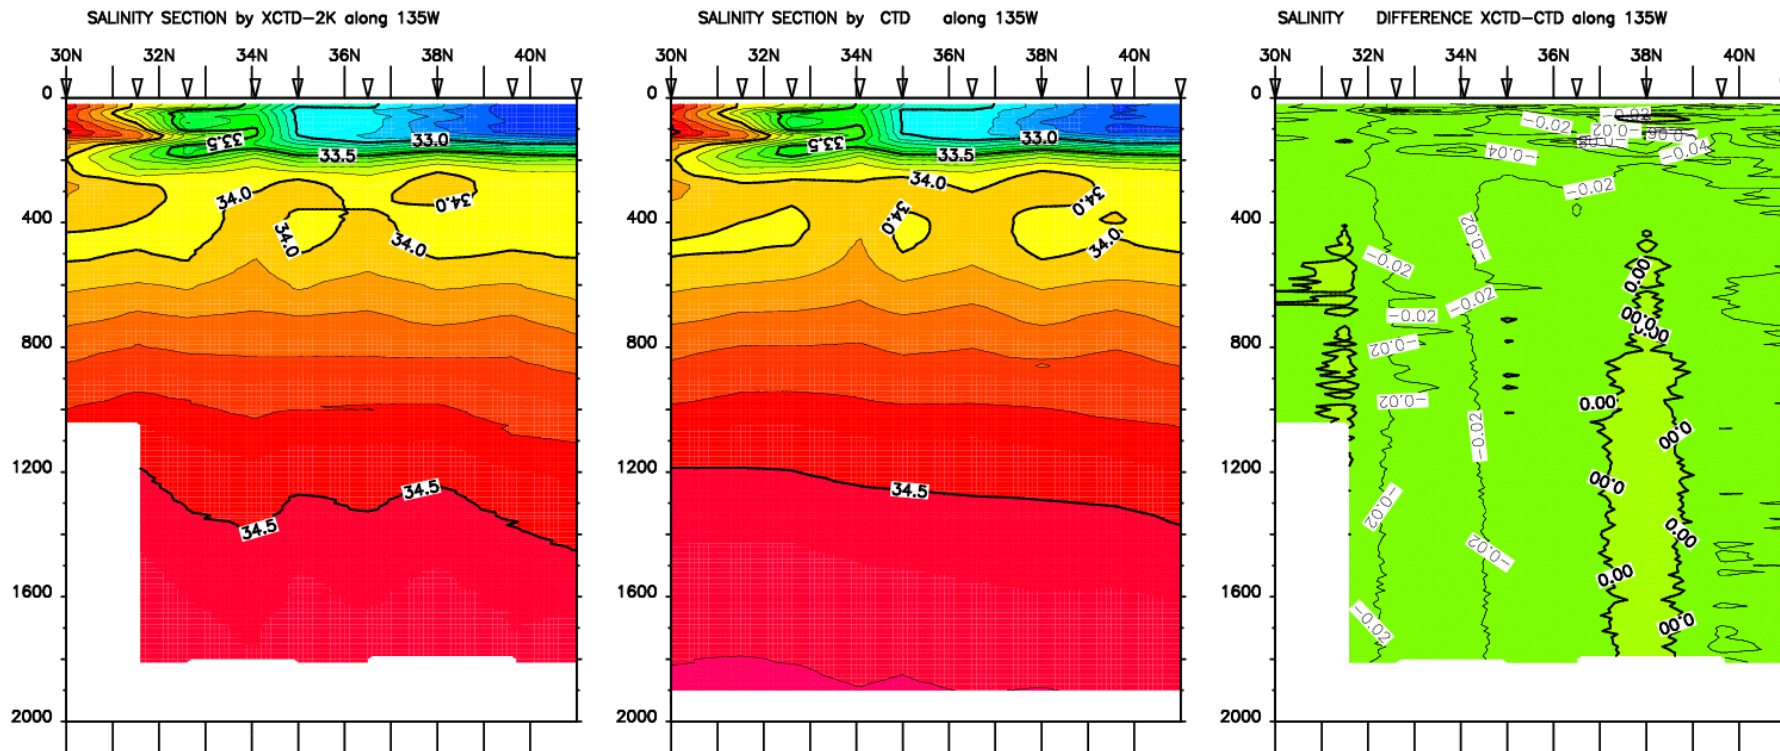

Collection and evaluation of marine observations from the International SeaKeepers Society Autonomous VOS Fleet

Edward J. Kearns¹, Steven Browdy, Rupert Minnett, Christine Caruso-Magee, Geoffrey K. Morrison and Rod G. Zika

The non-profit International SeaKeepers Society was founded by environmentally minded owners of large yachts. They had a strong interest in the health of the oceans and waterways, and were willing to equip their personal vessels with instruments to contribute to scientific research. The autonomous Ocean and Weather Monitoring system collects and transmits weather information and sea surface temperature (SST) every three hours to NWSTG for use by the National Weather Service for forecasting. More extensive data: temperature, conductivity, dissolved oxygen, pH, and Eh, together with relative wind speed and direction, air temperature, relative humidity, barometric pressure, ships position, speed and heading are recorded to the computer hard drive every minute for later downloading to the SeaKeepers database. Today, with the continued support of our founding members, we are becoming involved in equipping commercial vessels, cruise ships, piers and buoys with autonomous ocean and weather monitoring systems.. The data described in this paper are heavily weighted toward cruise ships which operate 24 hours per day and 7 days per week.

The instrumentation installed upon all of these vessels and observing platforms is essentially Identical. Figure 1 shows the components of the system. The computer and instrument modules are stainless steel NEMA-4 enclosures, which can be mounted in a variety of configurations. An INMARSAT std-C transceiver is housed in the computer module. The software collects the data and automatically sends a data message which encodes the 10 minute average immediately before the transmission time for each reporting sensor and sends it to the SeaKeepers data center at the University of Miami.

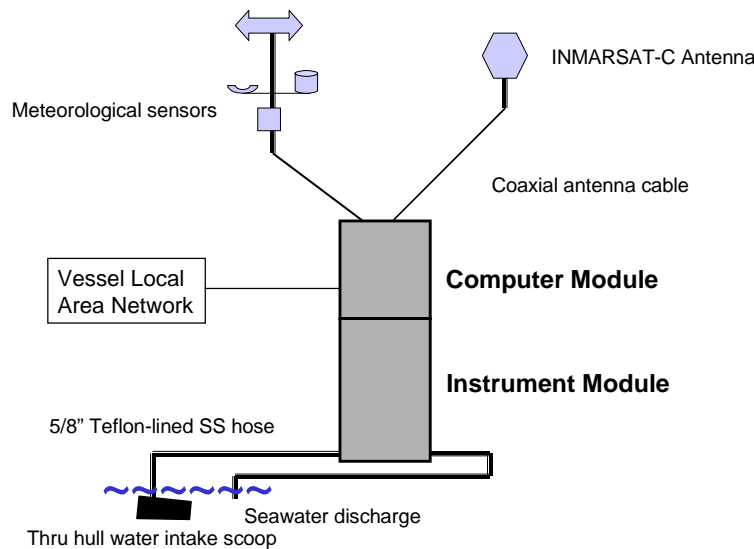


Figure 1. Schematic of the SeaKeepers Ocean and Weather Monitoring System.

¹ University of Miami, 4600 Rickenbacker Causeway, Miami FL 33149

From selected vessels (13 out of 40+ at the time of this report), a subset of these data are formatted in standard WMO FM-13 and FM-62 messages at RSMAS and sent to NWSTG, and then routed to GTS and other locations. Figure 2 shows the position for observations delivered to NWS during 2001. Other systems are being added to the reporting group as their software is upgraded and field tested. The vessels, and other SeaKeepers systems on fixed platforms, are assigned call signs in the format KS nnn , to preserve anonymity for the owners of superyachts. The full data set (averaged and high-resolution) will be available at SeaKeepers Web-based data server for use by scientists and educators.

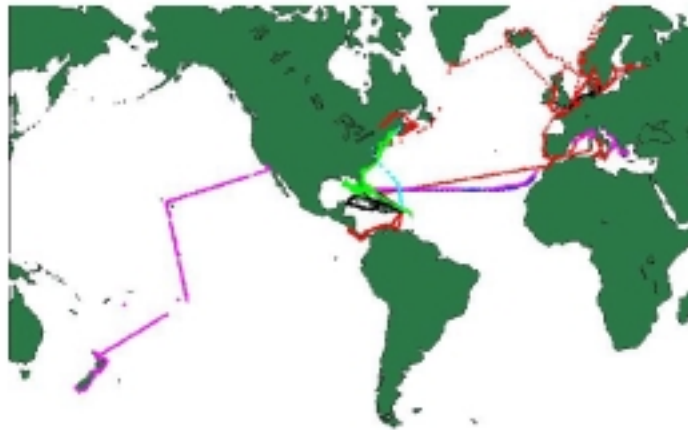


Figure 2. Map of SeaKeepers observations delivered to NWS during 2001.

Membership in the International SeaKeepers Society has continued to grow. Systems are operating on three cruise ships, two research vessels, 30 yachts, a pier, and are being installed in new yachts, commercial tankers. A low-energy version is being developed for fixed buoys, in cooperation with the National Data Buoy Center (NDBC).

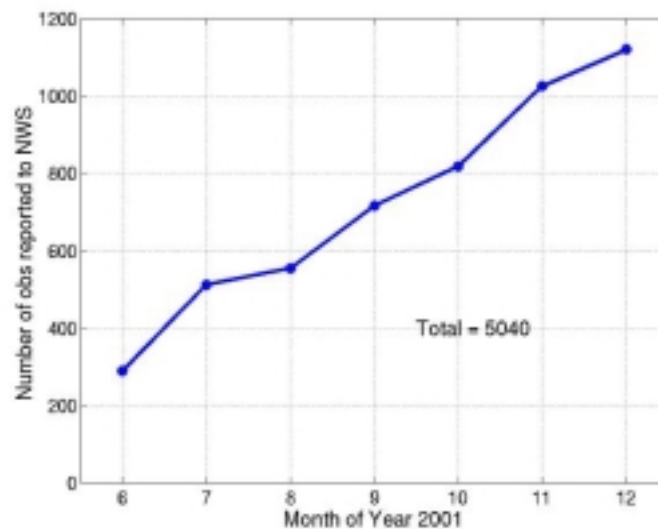


Figure 3. Number of weather observations reported from SeaKeepers vessels by month.

Data Analysis

Each point in the following series of graphs represents one vessel, the error bars represent the repeatability of the data from that vessel. The “Y” axis on each graph represents the average difference from the NCEP model, while the “X” axis indicates the number of observations reported from that ship.

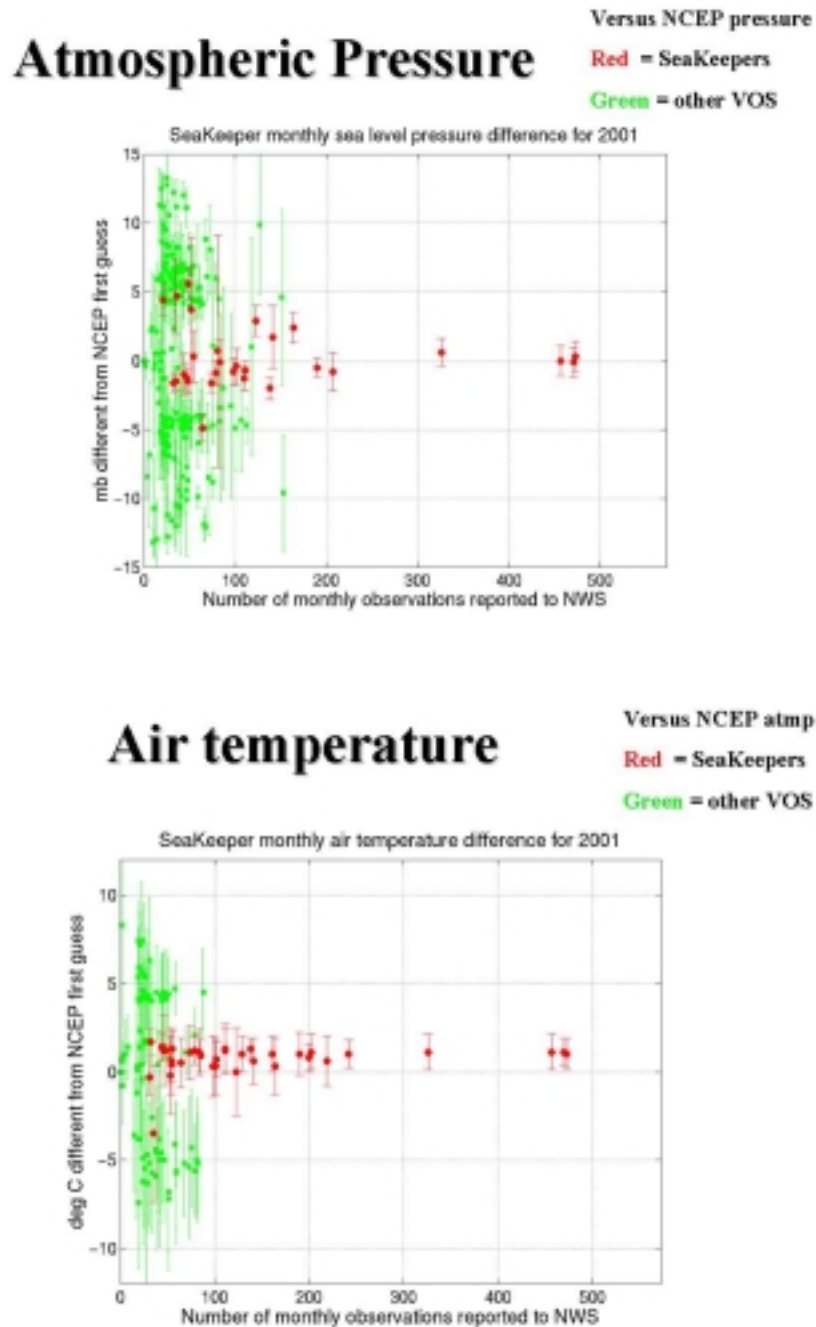


Figure 4. Comparison of SeaKeepers and VOS fleet data to the NCEP model predictions

It is immediately apparent that the SeaKeepers data shows excellent accuracy, data repeatability, and data quantity for atmospheric temperature and pressure (figure 4). Wind speed and direction observations (figure 5) are more difficult, and while the SeaKeepers data compares well with the entire VOS fleet, the quality is not as good as the pressure and temperature data when compared to the NCEP model. We believe that this problem is attributable to several different sources and we shall attempt to explore some of them here.

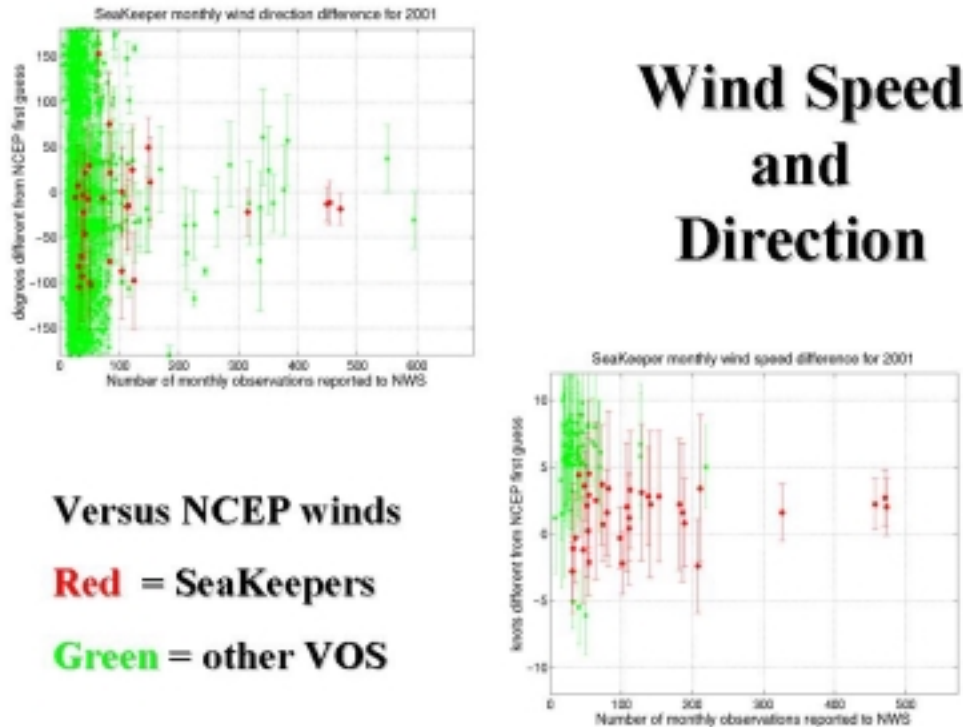


Figure 5. Comparison of SeaKeepers and the VOS fleet wind data to the NCEP predictions

With one or two notable exceptions, the wind speed and direction error rates are higher near shore, the area where one would expect the NCEP open ocean models to be least reliable (Figure 6)



Figure 6. Topographic influence on gross wind error

There is a better correlation between the SeaKeepers data and QuikSCAT satellite winds and a strong inverse correlation between difference between the observed values and those predicted by the models with distance from the coast (Figure 7).

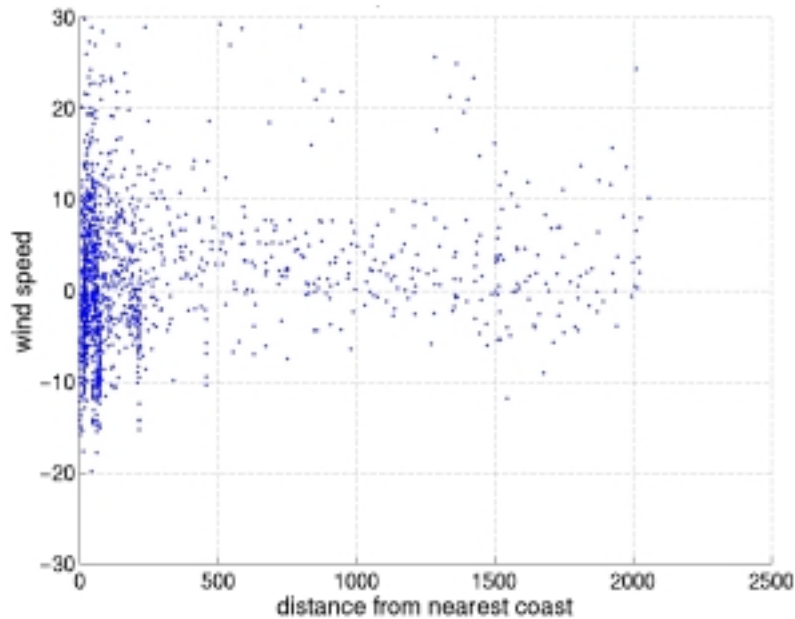


Figure 7. Wind Speed difference from QuikSCAT model predictions, for all SeaKeepers vessels

We have singled out one vessel, *Carnival Triumph*, whose repetitive course and apparent large measured differences have made us suspicious. The lowest quality is indicated wind direction, wind speed differences being localized to near the Cuban coast where presumably other sources of wind observation are limited. The high incidence of large direction differences on the southeasterly outbound leg of the Eastern Caribbean route led us to more closely examine the placement of the anemometer. There appears, from examination of wind speed and wind direction differences vs relative wind direction, to be a total absence of reported wind from 150 to 350 degrees relative to the bow of the vessel. A vessel steaming at 20 knots, as this one routinely does, would not be expected to report much in the way of relative wind from 90 to 270 degrees. The absence of incident winds in the 270 to 359 quadrant was surprising until we more closely examined the location of the wind sensor relative to a 4 inch diameter tripod mast which sits in exactly this quadrant relative to the wind sensor (Figure 8.). The anemometer will be repositioned and this type of data analysis repeated to quantify the effect.

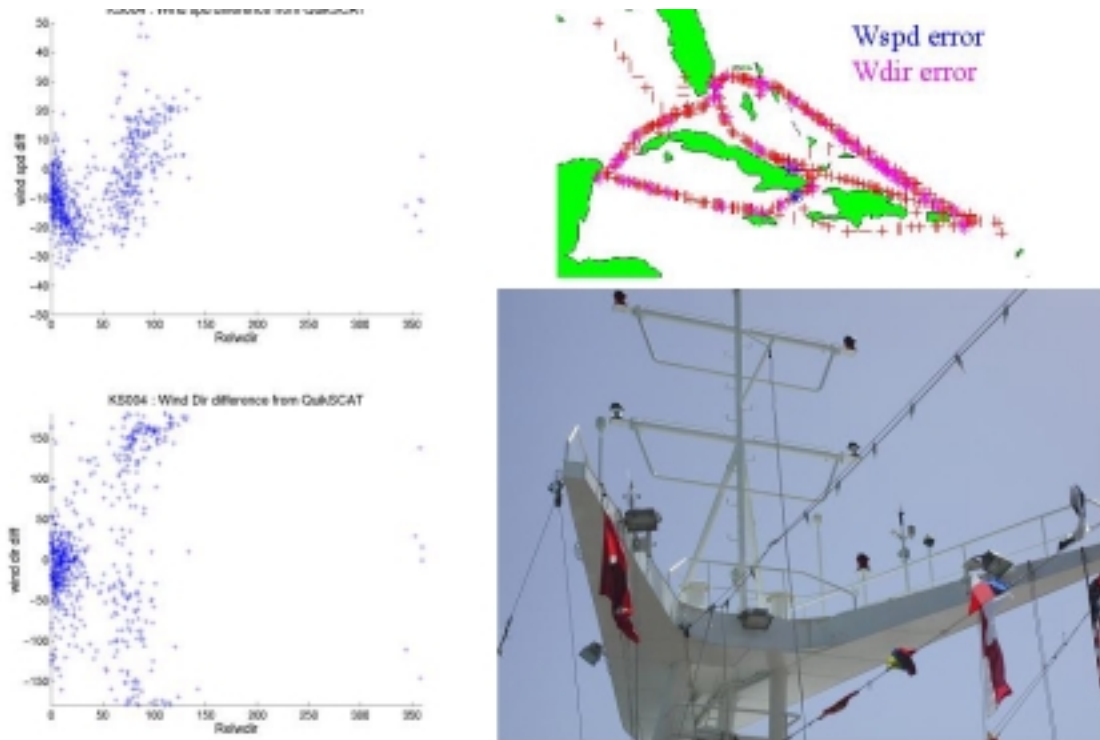


Figure 8. Wind bias in observations from Carnival Triumph

Generally the SeaKeepers Sea Surface temperature data is good and in excellent agreement with the NCEP model Figure 9). The small bias on the more numerous reporting ships could be an indication of the nonrepresentative depth of measurements on the cruise ships, typically 7 to 10 meters below sea level. For all high data volume vessels, the night time agreement is superior to the daytime data sets indicating that diurnal surface heating could be playing a significant role Figure 10)..

Sea Surface Temperature

Versus NCEP SST

Red = SeaKeepers

Green = other VOS

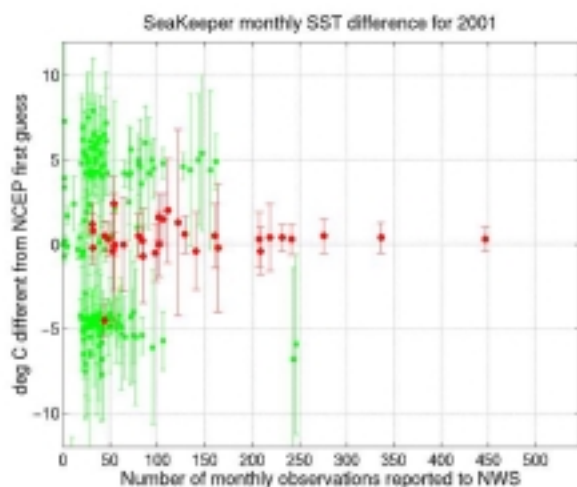


Figure 9. Sea Surface Temperature observations compared to the NCEP model

Pathfinder .25° SST comparison

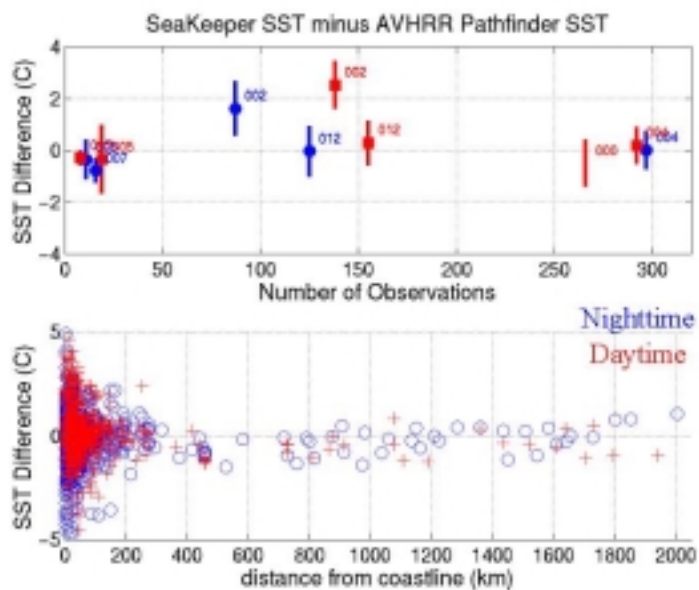


Figure 10. Day/night errors comparison. The numbers on the upper plot identify specific SeaKeepers vessels by call sign.

Future directions:

- Improve quality control procedures
- Expand the number of SeaKeepers systems reporting to the NWS.
- Deployments in coastal moored buoys and piers.
- Installations on more freighters and container ships, for routine continuous reporting.

Summary

The international fleet of SeaKeepers vessels are now routinely collecting large numbers of good quality meteorological and oceanographic measurements. The data are being delivered shoreside in real time. While the observations are “good” compared to the VOS fleet in general, these measurements can be made better by improved QA/QC procedures and identifying problems with particular vessels. Continued and expanded deployments of the SeaKeepers instrument system is warranted, and should provide a large database of world-wide oceanographic and meteorological observations. A particular value of the use of private yachts as volunteer observing platforms is the opportunity to collect data from less frequented areas of the oceans, away from shipping lanes and major commercial ports.

The Accuracy of Voluntary Observing Ships' Marine Meteorological Observations

Elizabeth C. Kent and Peter K. Taylor

Southampton Oceanography Centre, Southampton, UK

Abstract

Typically the merchant ships of the Voluntary Observing Ships scheme are recruited by a Port Meteorological Officer at a port which the ship frequently visits. The observing practises and meteorological instruments provided depend on the recruiting country and are often very basic. Indeed, the VOS system was primarily designed to aid weather forecasting, while climate change studies require higher quality data. A better understanding of the error characteristics of the VOS data is now needed for both data assimilation and climate studies.

Using sea and air temperatures as an example, this talk will show how the large random errors present in the data can be quantified. Determining the smaller, systematic biases is more difficult because correlations exist between the different variables and their respective errors. For example, the error in SST data measured using buckets is likely to depend on the air - sea temperature difference, and hence on both sea and air temperatures. Surprisingly the scatter in the air temperature data seems to vary with how the SST is measured, probably because the observing practises strongly depend on recruiting country. By transforming the data to form new variables which are uncorrelated, the systematic errors can be properly estimated and then transformed back in terms of the observed quantities. The results suggest that, while SST data from engine room intake (ERI) thermometers are very scattered, any mean bias is small. In contrast, while bucket SST data is less scattered, it is biased cold in regions of high heat flux. Previously it had been assumed that ERI data were biased warm. A report detailing the preliminary results of these studies can be downloaded from: <http://www.soc.soton.ac.uk/JRD/MET/PDF/goa.pdf>

Improving the quality of future VOS data requires fuller information on instrumentation and observing techniques, and the implementation of good observing practises. These are goals of the WMO sponsored VOS subset for climate (VOSCLIM). Eventually it is hoped to introduce better instrumentation. For example, hull contact SST sensors installed with acoustic data transmission rather than cables. The IMET project at Woods Hole Oceanographic Institute and the AutoFlux system (developed by SOC with European partners) are prototypes for future VOS instrumentation systems.



An observation strategy over the Atlantic

Presentation to SOT meeting

Goa, India 26 Feb 2002

By


François Gérard, Météo-France

2003/9/11

SOT - Goa - 2002

Diapo 1

European Co-operations in Meteorology

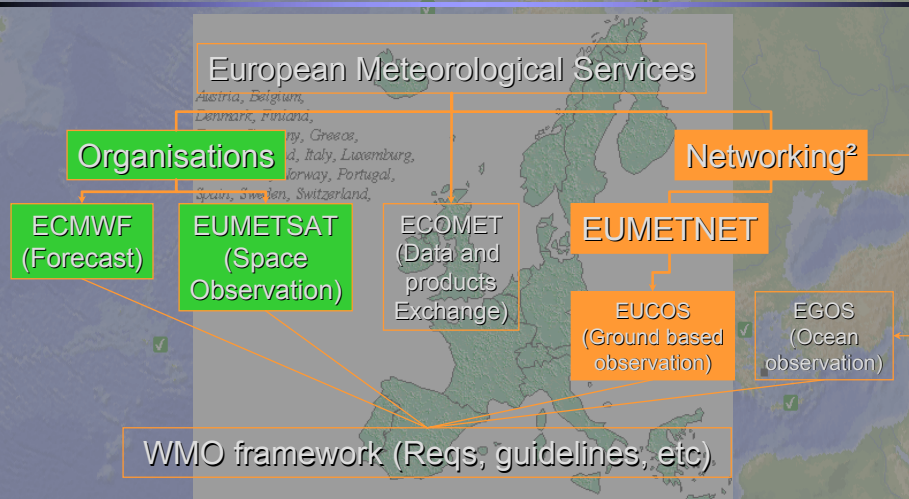

2003/9/11

SOT - Goa - 2002

Diapo 2

What is EUCOS?


- ☞ An observing system designed for the support of short-term GNWP (24-72h) over Europe ;
- ☞ An evolutive system ;
 - ✓ Technical evolutions in ground based observation techniques ;
 - ✓ Expected space segment evolutions ;
 - ✓ Evolving requirements of GNWP
- ☞ A mechanism for co-operative definition, implementation and operation of that observing system ;
- ☞ An implementation Programme (1999-2001) having led to the above through
 - ✓ observing system experiments and sensitivity studies,
 - ✓ cost benefit assessments,

2003/9/11

SOT - Goa - 2002

Diapo 3

Present oceanic undersampling

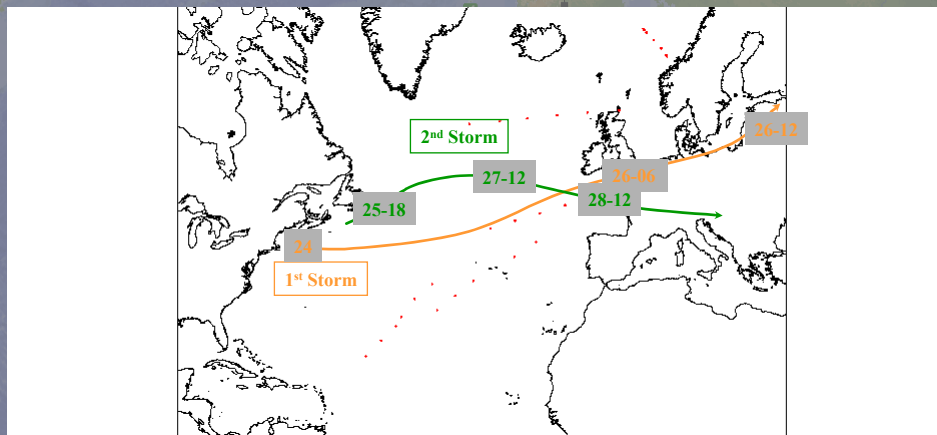

2003/9/11

SOT - Goa - 2002

Diapo 4

EUCOS extension over sensitive areas

EUCOS-0.5
Extension
with new profile and level data
in areas sensitive for
weather prediction
over Europe

TO

Present system

HYPOTHESIS:

✓ Addition of profile
or level data in
sensitive areas may
improve efficiency of
the system.

TOOLS:

✓ Climatology of
sensitive areas
✓ Pilot projects (ASAP)
✓ Ceiling : 5 M€/yr

2003/9/11


SOT - Goa - 2002

Diapo 5

... Results for the North

Winter sensitivity
maxima
confirmed

Maximum
sensitivity layer :
700 – 400 hPa

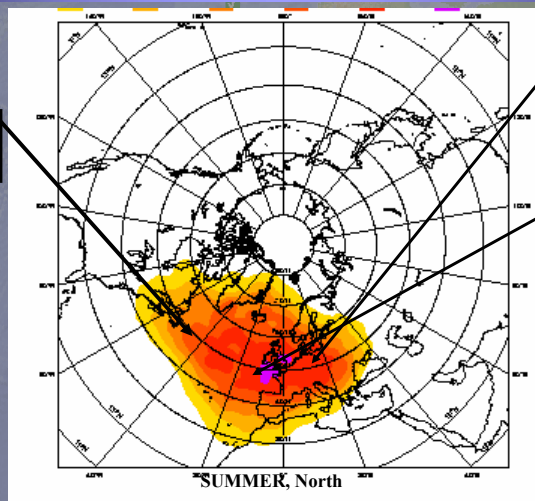

Europe
is also
a
sensitive
Area !!


Eastward shift
of maximum
sensitivity
patterns in
summer
Towards an
area also
identified by
case studies

2003/9/11

SOT - Goa - 2002

Diapo 6

Guidelines for EUCOS over the Ocean

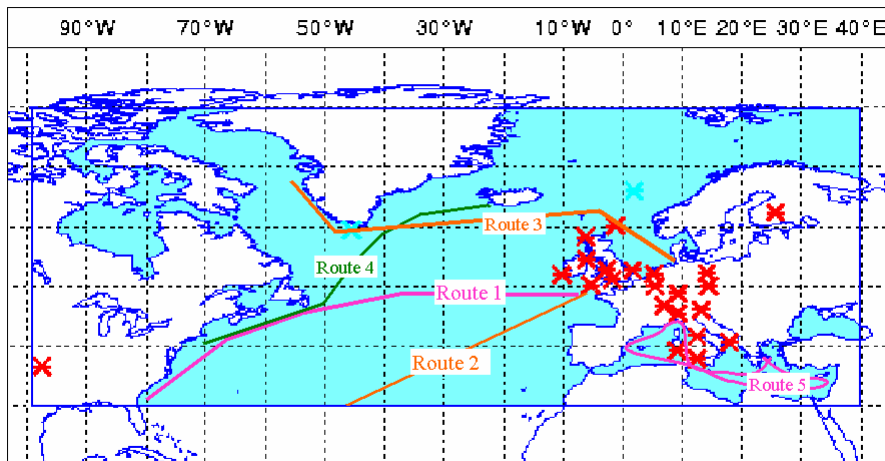


2003/9/11

SOT - Goa - 2002

Diapo 7

Variable operation mode

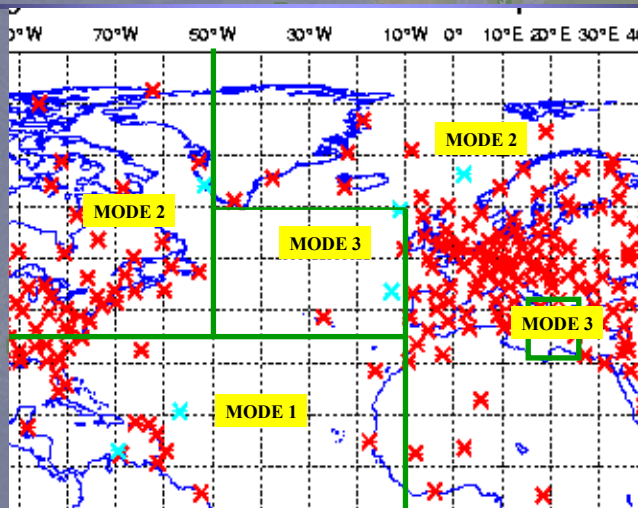

2003/9/11

EUCOS Programme

Diapo 8

Results of the experiment

Name	Call Sgn	Evolution : Sep-Oct / Jun-Jul				
		00	06	12	18	Total
Hornbay	ELML7	-10	10	-3	9	6
Fort Royal	FNOR	5		-2	7	10
Fort Fleur d'Epée	FNOU	3		1	8	12
Fort Desaix	FNPH	-15		-3	6	-12
Douce France	FNRS	1	3	-2	8	10
Arina Arctica	OVYA2	-6	8	3	1	6
Nuka Arctica	OXYH2	-2	8	2	14	22
Peljasper	SWJS	3	6	4	9	22
Lagarfoss	V2XO	12	12	11	11	46
Sealand Achiever	WPKD	7	7	1	5	20
Canmar Pride	ZCBP6	4		-1	13	16
Total		2	54	11	91	158

2003/9/11

SOT - Goa - 2002

Diapo 9

Conclusion of the experiment


- ✦ Implementing-location dependent operations is feasible and recommended;
- ✦ The E-ASAP ships are implementing this observation strategy;
- ✦ Next steps :
 - ✓ Test a time dependent operations using targeting tools,
 - ✓ An experiment is planned under EUCOS for end 2002 or beginning of 2003

2003/9/11

SOT - Goa - 2002

Diapo 10

Surface observation today

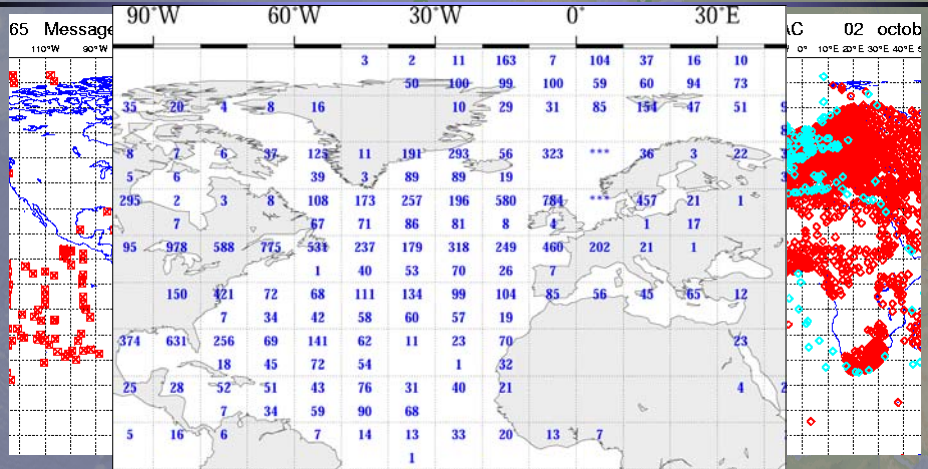


Need to co-ordinate and target surface observation

2003/9/11

SOT - Goa - 2002

Diapo 11

Surface Pressure sensitivity North

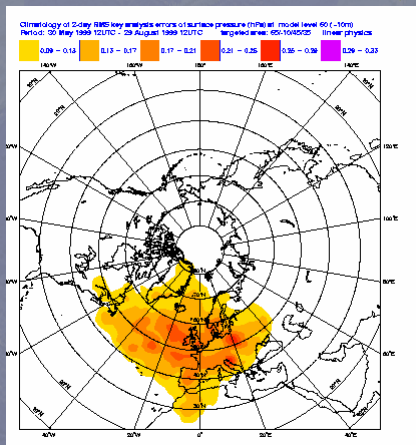

EUCOS requirements...

From NWP requirements

- ✓ The signal of surface pressure is small on the average, but is likely to increase according to developments in data assimilation and physics modelling
- Impact of data from buoys (and ships) on synoptic forecast is obvious on some cases
- Results call for developing targeted observation from buoys :
 - ✓ Winter / Summer deployment ;
 - ✓ On request Activation / Desactivation ;
- Targeted observation strategies to be developed

2003/9/11

SOT - Goa - 2002

Diapo 13

CONCLUSIONS

- Sensitivity and impact studies enable to identify where to increase the observation effort over the Atlantic;
- Implementing location-dependent observation from ships is feasible;
- Time-dependent targeting has still to be demonstrated :
 - ✓ EUCOS studies programme;
 - ✓ THORPEX offers a framework;
- Co-operation increases cost-efficiency of obs systems**

2003/9/11

SOT - Goa - 2002

Diapo 14

SCIENTIFIC AND TECHNICAL WORKSHOP OF
THE JCOMM SHIP OBSERVATIONS TEAM
Goa, India, 26 February 2002

List of Participants

ARGENTINA

Ms Miriam Andrioli
Chief, Maritime Division
Forecasting Department
Servicio Meteorológico Nacional
25 de Mayo 658
1002 BUENOS AIRES
Argentina
Telephone: +54-11 5167 6711
Telefax: +54-11 5167 6711
E-mail: msandrioli@infovia.com.ar
andrioli@meteofa.mil.ar

AUSTRALIA

Mr Rick Bailey
Chairman, JCOMM Ship Observations Team
CSIRO/BMRC
Joint Australia Facility for Ocean
Observing Systems
G.P.O. Box 1289K
MELBOURNE, Vic. 3001
Australia
Telephone: +61-3 9669 4170
Telefax: +61-32 9669 4660
E-mail: rick.bailey@marine.csiro.au

Mr Graeme Ball
Manager, Marine Observations Unit
Bureau of Meteorology
GPO Box 1289K
MELBOURNE, Vic. 3001
Australia
Telephone: +61-3 9669 4203
Telefax: +61-3 9669 4168
E-mail: g.ball@bom.gov.au

Mr David K. Evans
National Manager
Observations Operations
Bureau of Meteorology
GPO Box 1289K
MELBOURNE, Vic. 3001
Australia
Telephone: +61-3 9669 4205
Telefax: +61-3 9669 4168
E-mail: d.evans@bom.gov.au

BULGARIA

Dr Georgi Iliev Kortchev
Department of Forecasts; Senior Researcher
National Institute of Meteorology and
Hydrology
66 Tzaringradsko chaussee
Mladost 1
SOFIA 1784
Bulgaria
Telephone: +359-2 975 39 86
Telefax: +359-2 988 44 94; 988 03 80
E-mail: Georgi.Kortchev@meteo.bg

CANADA

Mr Ronald Fordyce
Supt. Marine Data Unit
Environment Canada
Port Meteorological Office
100 East Port Blvd
HAMILTON, Ontario L8H 7S4
Canada
Telephone: +1-905 312 0900/0933
Cell Phone: +1-905 719 0820
Telefax: +1-905 312 0730
E-mail: ron.fordyce@ec.gc.ca

Mr J.R. Keeley
MEDS, Department of Fisheries and Oceans
W082, 12th floor, 200 Kent Street
OTTAWA, Ontario
Canada K1A 0E6
Telephone: +1-613 990 0246
Telefax: +1-613 993 4658
E-mail: keeley@meds-sdmm.dfo-mpo.gc.ca

Dr Savithri (Savi) Narayanan
Co-president, JCOMM
Marine Environmental Data Service
Dept. of Fisheries and Oceans
WO82, 12th floor
200 Kent Street
OTTAWA, Ontario
Canada K1A 0E6
Telephone: +1-613 990 0265
Telefax: +1-613 993 4658
E-mail: narayanans@dfo-mpo.gc.ca

FRANCE

Mr Jean-Louis Gaumet
Vice-chairman, ASAP Panel
Météo France
DSO/DOA/D
7, rue Teisserenc de Bort
B.P. 202
78195 TRAPPES
France
Telephone: +33-1 30 13 64 70
Telefax: +33-1 30 13 60 68
E-mail: jean-louis.gaumet@meteo.fr

Mr François Gérard
Chef du Département océan
Direction générale Météo-France
1, quai Branly
75340 PARIS Cédex 07
France
Telephone: +33-1 45 56 70 24
Telefax: +33-1 45 56 74 47
E-mail: francois.gerard@meteo.fr

Mr Jean-Paul Rebert
Institut de recherche pour le développement
(IRD)
Département Milieu et Environnement
213, rue La Fayette
75480 Paris Cédex 10
France
Telephone: +33-1 48 03 76 83
E-mail: rebert@paris.ird.fr

Mr David Varillon
Institut de recherche pour le développement
(IRD)
Centre de Nouméa
US025 - Moyens à la Mer et Observatoire
Océanique
BP A5
NOUMEA
New Caledonia
France
Telephone: +687 26 07 11
Telefax: +687 26 43 26
E-mail: David.Varillon@noumea.ird.nc
<http://noumea.ird.nc/ECOP>

GERMANY

Mr Ekkehard Mittelstaedt
Bundesamt fuer Seeschifffahrt und
Hydrographie
Bernhard-Nocht-Str. 78
20359 HAMBURG
Germany

Telephone: +49-40 3190 3220
Telefax: +49-40 3190 5000
E-mail: mittelstaedt@bsh.de

Dr Volker Wagner
Chairman, EGOS
Deutscher Wetterdienst
Klima und Umwelt, FE 26
P.O. 700421
D-22004 HAMBURG
Germany
Telephone: +49-40 66901430
Telefax: +49-40 6690 1499
E-mail: volker.wagner@dwd.de

INDIA

Mr V.V. Gopalkrishna
Indian XBT Program
Physical Oceanography Division
National Institute of Oceanography
Dona-Paula
GOA-403 004
India
Telephone: +91-832 221322, 226253, Ext.
302
Telefax: +91-832 223340, 221360, 229102
E-mail: gopal@darya.nio.org

Dr M. Dileep Kumar
National Institute of Oceanography
Dona Paula 403004
GOA
India
Telephone: +91-832 226253 ext. 4398
Telefax: + 91-832 223340
E-mail: dileep@darya.nio.org

Dr G. Narayana Swamy
National Institute of Oceanography
Dona Paula 403004
GOA
India
Telephone: +91-832 226253 ext. 4271
Telefax: + 91-832 223340
E-mail: narayana@darya.nio.org

Dr M.R. Ramesh Kumar
National Institute of Oceanography
Dona Paula 403004
GOA
India
Telephone: +91-832 226253
Telefax: + 91-832 223340
E-mail: kramesh@darya.nio.org

Dr N.H. Hashimi
National Institute of Oceanography
Dona Paula 403004
GOA
India
Telephone: +91-832 226253
Telefax: + 91-832 223340
E-mail: hashimi@darya.nio.org

Dr M.R. Nayak
National Institute of Oceanography
Dona Paula 403004
GOA
India
Telephone: +91-832 226253 ext.4347
Telefax: + 91-832 223340
E-mail: mrrnayaki@darya.nio.org

Mr S.K. Prasad
Director
India Meteorological Department
Shivaji Nagar
PUNE - 411 005
India
Telephone: +91-20 5535211
Telefax: +91-20 5533201
E-mail: imdpune@pn3.vsnl.net.in

ISRAEL

Dr Matti Weiss
Rapporteur on Regional Marine
Meteorological
Services
Department of Marine Meteorology
Israel Meteorological Service
P.O. Box 25
BET DAGAN
50250 Israel
Telephone: +972-3 968 2106
Telefax: +972-3 968 2126
E-mail: weissm@ims.gov.il

JAPAN

Mr Tadashi Ando
Marine Division
Climate and Marine Department
Japan Meteorological Agency
1-3-4 Otemachi, Chiyoda-ku
TOKYO 100-8122
Japan
Telephone: +81-3 3211 4966
Telefax: +81-3 3211 6908
E-mail: t_ando@met.kishou.go.jp

Dr Yukihiro Nojiri
Head, Carbon Cycle Research Laboratory
Climate Change Research Project
National Institute for Environmental Studies
Tsukuba
IBARAKI 305-8509
Japan
Telephone: +81-298 50 2499
Telefax: +81-298 51 4732
E-mail: nojiri@nies.go.jp

KENYA

Mr Ali Juma Mafimbo
Port Meteorological Officer
Meteorological Department
Box 98512
MOMBASA
Kenya
Telephone: +254-11 225685
E-mail: mafimbo@yahoo.com

MALAYSIA

Mr Alui bin Bahari
Malaysian Meteorological Service
Jalan Sultan
46667 PETALING JAYA SELANGOR
Darul Ehsan
Malaysia
Telephone: +60-3 7958 7422
Telefax: +60-3 7955 0964
E-mail: alui@kjc.gov.my

POLAND

Dr Miroslaw Mietus
Chairman, JCOMM Expert Team on Marine
Climatology
Institute of Meteorology and Water
Management - Maritime Branch
Waszyngtona 42
PL-81-342 GDYNIA
Poland
Telephone: +48-58 6203532
Telefax: +48-58 6207101
E-mail: mietus@imgw.gdynia.pl
<http://www.imgw.gdynia.pl>

RUSSIAN FEDERATION

Dr Alexander A. Postnov
State Oceanographic Institute
6 Kropotkinskii Lane
119992 MOSCOW
Russian Federation
Telephone: +7-095 246 2889

Telefax: +7-095 246 7288
E-mail: a_postnov@mail.ru

SAUDI ARABIA

Mr Ahmaed Yahya Hussein
Director of Observations and Basic Systems
Presidency of Meteorology and
Environmental Protection
P.O. Box 1358
JEDDAH
Saudi Arabia
Telephone: +966-2 6512312 ext.2566
E-mail: metobah@hotmail.com

SINGAPORE

Mr Lim Tian Kuay
Rapporteur on Regional Marine
Meteorological
Services
Meteorological Service Singapore
P.O. Box 8 Singapore Changi Airport
Singapore 918141
Singapore
Telephone: +65 545 7195
Telefax: +65 545 7192
E-mail: LIM_Tian_Kuay@mss.gov.sg

UNITED KINGDOM

Ms Sarah North
Project Leader, VOS Climate Project
Met Office
Observations Supply - Marine Networks
Beaufort Park
Easthampstead
WOKINGHAM, Berkshire RG40 3DN
United Kingdom
Telephone: +44-1344 85 5617
Telefax: +44-1344 85 5873
E-mail: sarah.north@metoffice.com

Dr Peter K. Taylor
James Rennell Division (254/27)
Southampton Oceanography Centre
European Way
SOUTHAMPTON, SO14 3ZH
United Kingdom
Telephone: +44-23 8059 6408
Telefax: +44-23 8059 6400
E-mail: peter.k.taylor@soc.soton.ac.uk

USA

Mr Steven K. Cook
Atlantic Oceanographic and Meteorological
Laboratories (R/AOML)
Office of Oceanic and Atmospheric Research
(NOAA)
8604 La Jolla Shores Drive
LA JOLLA, CA 92038
USA
Telephone: +1-858 546 7103
Telefax: +1-858 546 7185
E-mail: skcook@ucsd.edu

Mr Warren H. Keenan
NOAA Office of Global Programmes
1100 Wayne Avenue, Suite 1210
SILVER SPRING, MD 20910
USA
Telephone: +1-301 427 2089 ext. 155
Telefax: +1-301 427 2073
E-mail: warren.keenan@noaa.gov

Dr W. Stanley Wilson
JCOMM Observations PA Coordinator
Chairman, JCOMM Observations
Coordination Group
NOAA, HCHB 5224
14th and Constitution Avenue, NW
WASHINGTON, DC 20230
USA

MANUFACTURERS

AXYS

Dr Thomas Vandall
Director of Sales and Marketing
AXYS Environmental Systems
2045 Mills Road
P.O. Box 2219
SIDNEY, BC
Canada
Telephone: +1-250 655 5868
Telefax: +1-250 655 5856
E-mail: tvandall@axys.com

TSKA

Mr Greg Ferguson
TSKA, Inc.
46208 SE 139th Place
NORTH BEND, WA 98045
USA
Telephone: +1-425 888 3404
E-mail: trade@tsk-jp.com

TSURUMI-SEIKI

Mr Hiroshi Iwamiya
President
Tsurumi-Seiki Co. Ltd.
2-20, 2-Chome, Tsurumi-Chuo
Tsurumi-Ku
YOKOHAMA 230-0051
Japan
Telephone: +81-45 521 5252
Telefax: +81-45 521 1717
E-mail: trade@tsk-jp.com

VAISALA

Mr Simon Harrod
Vaisala
P.O. Box 619
3 Guest St
HAWTHORN, Vic. 3122
Australia
E-mail: simon.harrod@vaisala.com

Mr Erkki Järvinen
Vaisala Oy
P.O. Box 26
FIN-00421 HELSINKI
Finland
Telephone: +3589 8949 1
Telefax: +3589 8949 2564
E-mail: Erkki.Jarvinen@vaisala.com

ORGANIZATIONS

EUMETSAT

Mr Sean Burns
System Operations Manager
EUMETSAT
Postfach 10 05 55
D-64205 DARMSTADT
Germany
Telephone: +49-6151 807 571
Telefax: +49-6151 807 304
E-mail: burns@eumetsat.de

IMSO

Mr Andrew C. Fuller
International Mobile Satellite Organization
(IMSO)
99 City Road
LONDON EC1Y 1AX
United Kingdom
Telephone: +44-20 7728 1378
Telefax: +44-20 7728 1172
E-mail: andy_fuller@imso.org

PROGRAMMES/PROJECTS

SEAKEEPERS

Mr Geoffrey Morrison
The International SeaKeepers Society
RSMAS/MAC
4600 Rickenbacker Causeway
MIAMI, FL 33149-1098
USA
Telephone: +1-786 325 3733
Telefax: +1-305 361 4689
E-mail: geoffmorrison@bigfoot.com

WRAP

Captain G.V. Mackie
Project Leader, WRAP
30 Keephatch Road
WOKINGHAM, Berkshire RG40 1QJ
United Kingdom
Telephone: +44-1189 783 687
Mobile: +44-7770 933 046
Telefax: +44-1189 890 379
E-mail: gvmackie@cs.com

SECRETARIAT

Dr Peter Dexter
Chief, Ocean Affairs Division
World Meteorological Organization
7 bis, Avenue de la Paix
Case postale No 2300
CH-1211 GENEVE 2
Switzerland
Telephone: +41-22 730 82 37
Telefax: +41-22 730 80 21
E-mail: dexter@www.wmo.ch

Mr Etienne Charpentier
Technical Coordinator, DBCP and SOOP
JCOMMOPS
Parc Technologique du Canal
8-10 rue Hermes
F-31526 RAMONVILLE SAINT-AGNE
France
Telephone: +33-5 61 39 47 82
Telefax: +33-5 61 75 10 14
E-mail: charpentier@jcommops.org

Ms Teruko Manabe
Ocean Affairs Division
World Weather Watch-Applications
Department
World Meteorological Organization
7 bis, Avenue de la Paix

Case postale No 2300
CH-1211 GENEVE 2
Switzerland
Telephone: +41-22 730 84 49
Telefax: +41-22 730 80 21
E-mail: manabe_t@gateway.wmo.ch

Mr Yves Tréglos
GOOS Project Office
UNESCO/Intergovernmental
Oceanographic Commission
1, rue Miollis
75732 PARIS Cédex 15
France
Telephone: +33-1 45 68 39 76
Telefax: +33-1 45 68 58 12/3
E-mail: y.treglos@unesco.org

New JCOMM series replaces discontinued MMROA series

**JOINT WMO/IOC TECHNICAL COMMISSION
FOR OCEANOGRAPHY AND MARINE METEOROLOGY
TECHNICAL REPORT SERIES**

No.	Title	WMO/TD-No.	Issued
16	Scientific and Technical Workshop of the JCOMM Ship Observations Team - Presentations at the first session of the Ship Observations Team (Goa, India, 26 February 2002) - CD ROM only	WMO/TD-No. 1118	2002
15	Automated Shipboard Aerological Programme (ASAP) - Annual Report for 2001	WMO/TD-No. 1112	2002
14	Operational Oceanography - Scientific Lectures at JCOMM-I (Akureyri, Iceland, June 2001)	WMO/TD-No. 1086	2001
13	Advances in the Applications of Marine Climatology - The Dynamic Part of the WMO Guide to the Applications of Marine Climatology	WMO/TD-No. 1081	2001
12	Automated Shipboard Aerological Programme (ASAP) – Annual Report for 2000	WMO/TD-No. 1069	2001
11	JCOMM Capacity Building Strategy	WMO/TD-No. 1063	2001
10	Proceedings of CLIMAR 99	WMO/TD-No. 1062	2001
9	Estimation of Extreme Wind Wave Heights	WMO/TD-No. 1041	2000
8	Oceanographic and Marine Meteorological Observations in the Polar Regions - A Report to the Joint WMO/IOC Technical Commission on Oceanography and Marine Meteorology	WMO/TD-No. 1032	2000
7	Proceedings of a Workshop on Mapping and Archiving of Sea Ice Data – The Expanding Role of Radar, Ottawa, Canada, 2-4 May 2000	WMO/TD-No. 1027	2000
6	Automated Shipboard Aerological Programme (ASAP) – Annual Report for 1999	WMO/TD-No. 1011	2000
5	Voluntary Observing Ships (VOS Climate Subset Project (VOSCLIM) – Project Document - Revision 1	WMO/TD-No. 1042	2001
4	The Voluntary Observing Ships Scheme – A Framework Document	WMO/TD-No. 1009	2000
3*	JCOMM Ship-of-opportunity Programme Implementation Panel, Third Session, La Jolla,	WMO/TD-No. 1005	2000

*Out-of-print

No.	Title	WMO/TD-No.	Issued
	CA, USA, 28-31 March 2000 – SOOP Status Reports – SOOP Scientific and Technical Developments		
2	Meeting of Experts on a JCOMM/GOOS Polar Region Strategy, Geneva, Switzerland, 6-8 December 1999 - Status Reports from Existing Polar Region Observing Systems	-	2000
1*	First Transition Planning Meeting - St Petersburg, Russian Federation, 19-23 July 1999 – Status Reports from JCOMM Component Bodies and Activities	-	1999

MARINE METEOROLOGY AND RELATED OCEANOGRAPHIC ACTIVITIES REPORT SERIES

No.	Title	WMO/TD-No.	Issued
44	Marpolser 98 - Metocean Services for Marine Pollution emergency Response Operations, Townsville, Australia, 13-17 July 1998 – Proceedings - Volume 2 - Review and Information Papers	WMO/TD-No. 960	1999
	Marpolser 98 - Metocean Services for Marine Pollution emergency Response Operations, Townsville, Australia, 13-17 July 1998 – Proceedings - Volume 1 - Research Papers	WMO/TD-No. 959	1999
43	Proceedings of the International Workshop on Digitization and Preparation of Historical Marine Data and Metadata, Toledo, Spain, 15-17 September 1997	WMO/TD-No. 957	1999
-	Automated Shipboard Aerological Programme (ASAP) - Annual Report for 1998	WMO/TD-No. 951	1999
42	Provision and Engineering Operational Application of Ocean Wave Data - in French only	WMO/TD-No. 938	1998
41*	The Climate of the Baltic Sea Basin	WMO/TD-No. 933	1998
40	Automatisation de l'observation en mer Automation of Observations at Sea	WMO/TD-No. 928	1998
-	Automated Shipboard Aerological Programme (ASAP) - Annual Report for 1997	WMO/TD-No. 900	1998
39	Proceedings of the Commission for Marine Meteorology Technical Conference on Marine Pollution	WMO/TD-No. 890	1998

*Out-of-print

No.	Title	WMO/TD-No.	Issued
38	Evaluation of the Highest Wave in a Storm (A.V. Boukhanovsky, L.J. Lopatoukhin, V.E. Ryabinin)	WMO/TD-No. 858	1998
37	Tropical Coastal Winds (W.L. Chang)	WMO/TD-No. 840	1997
36	Handbook of Offshore Forecasting Services (Offshore Weather Panel)	WMO/TD-No. 850	1997
-	Automated Shipboard Aerological Programme (ASAP) - Annual Report for 1996	WMO/TD-No. 819	1997
35	Ice Navigation Conditions in the Southern Ocean (A.A. Romanov)	WMO/TD-No. 783	1996
-	Automated Shipboard Aerological Programme (ASAP) - Annual Report for 1995	WMO/TD-No. 767	1996
34	Polar Orbiting Satellites and Applications to Marine Meteorology and Oceanography – Report of the CMM-IGOSS-IODE Sub-group on Ocean Satellites and Remote Sensing	WMO/TD-No. 763	1996
33	Storm Surges (Vladimir E. Ryabinin, Oleg I. Zilberstein and W. Seifert)	WMO/TD-No. 779	1996
32*	Proceedings of the WMO/IOC Workshop on Operational Ocean Monitoring Using Surface Based Radars, Geneva, 6-9 March, 1995	WMO/TD-No. 694	1995
-	Proceedings of the WMO/IOC Technical Conference on Space-based Ocean Observations, September 1993, Bergen, Norway (US \$15.00)	WMO/TD-No. 649	1994
31*	Proceedings of the International Workshop on Marine Meteorology	WMO/TD-No. 621	1994
30	Proceedings of the International Seminar for Port Meteorological Officers	WMO/TD-No. 584	1993
29	Meteorological Requirements for Wave Modelling (Luigi Cavaleri)	WMO/TD-No. 583	1993
28*	Proceedings of the Commission for Marine Meteorology Technical Conference on Ocean Remote Sensing	WMO/TD-No. 604	1993
27	A Survey on Multidisciplinary Ocean Modelling and Forecasting (Johannes Guddal)	WMO/TD-No. 516	1992
26*	The Accuracy of Ship's Meteorological Observations - Results of the VSOP-NA		1991
25	Ships Observing Marine Climate - A Catalogue of the Voluntary Observing Ships Participating in the VSOP-NA	WMO/TD-No. 456	1991
24	Proceedings of the Commission for Marine	WMO/TD-No. 350	1990

*Out-of-print

No.	Title	WMO/TD-No.	Issued
	Meteorology Technical Conference on Ocean Waves		
23	Summary Report on National Sea-ice Forecasting Techniques	WMO/TD-No. 329	1989
22	Wind Measurements Reduction to a Standard Level (R.J. Shearman and A.A. Zelenko)	WMO/TD-No. 311	1989
21	Coastal Winds (E.P. Veselov)	WMO/TD-No. 275	1988
20*	La Prévision du Brouillard en Mer (M. Trémant)	WMO/TD-No. 211	1987
	Forecasting of Fog at Sea - in French only		
19	A Global Survey on the Need for and Application of Directional Wave Information (S. Barstow and J. Guddal)	WMO/TD-No. 209	1987
18	Baltic Multilingual List of Sea-ice Terms (Jan Malicki, Alex N. Turchin, Hans H. Valeur)	WMO/TD-No. 160	1987
17	Processing of Marine Data (G.D. Hamilton)	WMO/TD-No. 150	1986
16*	Field Workshop on Intercalibration of Conventional and Remote-sensed Sea Surface Temperature Data (A.E. Strong and E.P. McClain)		1985
15*	Forecast Techniques for Ice Accretion on Different Types of Marine Structures, Including Ships, Platforms and Coastal Facilities	WMO/TD-No. 70	1985
14	Scientific Lectures at CMM-IX	WMO/TD-No. 41	1985
13	User's Guide to the Data and Summaries of the Historical Sea Surface Temperature Data Project	WMO/TD-No. 36	1985
12	WMO Wave Programme: National Reports for 1984 on Wave Measuring Techniques, Numerical Wave Models and Intercomparisons	WMO/TD-No. 35	1985
*	Supplement No. 4 - Reports for 1991 to 1994 on Wave Measuring Techniques, Numerical Wave Models and Intercomparisons	WMO/TD-No. 35	1994
	Supplement No. 3 - Reports for 1989 to 1990 on Wave Measuring Techniques, Numerical Wave Models and Intercomparisons	WMO/TD-No. 35	1990
	Supplement No. 2 - Reports for 1986 to 1988 on Wave Measuring Techniques, Numerical Wave Models and Intercomparisons	WMO/TD-No. 35	1989
	Supplement No. 1 - Reports for 1985 on Wave Measuring Techniques, Numerical	WMO/TD-No. 35	1986

*Out-of-print

No.	Title	WMO/TD-No.	Issued
	Wave Models and Intercomparisons		
11	Drifting Buoys in Support of Marine Meteorological Services (Glenn D. Hamilton)	-	1983
10*	Guide to Data Collection and Services Using Service Argos (revised version)	-	1989
9	Intercalibrations of Directly-measured and Remotely Sensed Marine Observations (Alan E. Strong)	-	1983
8	Summary WMO Technical Conference on Automation of Marine Observations and Data Collection	-	1981
7*	Proceedings of the WMO Technical Conference on the Automation of Marine Observations and Data Collection	-	1981
6	Report on the Results of An Enquiry on Marine Meteorological Services Products	-	1981
5	The Automation of Observational Methods on Board Ship (M. Yasui)	-	1981
4	Intercalibration of Surface-based and Remotely Sensed Data (except Sea Surface Temperature Data) to Be Used in Marine Applications (E.P. McClain)	-	1981
3	Review of Reference Height for and Averaging Time of Surface Wind Measurements at Sea (F.W. Dobson)	-	1981
2	Investigation of Contemporary Methods of Measuring Sea Surface and Surface-layer Temperatures (F.S. Terziev)	-	1981
1*	Precipitation Measurement at Sea (G. Olbrück)	-	1981

*Out-of-print